


AF Series Specification

AFT1312U



【Features】

- Light source: Adopting dedicated and outdoor-specific LED, stronger reliability for outdoor application; Finished product ANSI SDCM≤5;
- Structure: New anti-tension structure, Integrated anti-tension silicone extrusion process, against internal stress and external tension;
White light double-layer circuit conductive, double power supply guarantee, broken boards without power cut;
- Product applications: outdoor illumination, architectural facade lighting; IP67
- Working/storage temperature: Ta: -40~60°C / 0~60°C
- White with 7 years warranty or working life =84000H, whichever comes first.

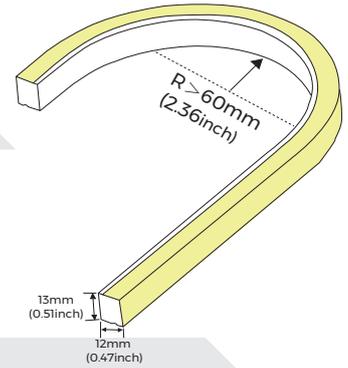


【Basic Parameters】

Model	CCT/colors	Color range	CRI	Input voltage (V)	Rated current (A/m)	Rated power (w/m)	Maximum power (w/m)	Lumens (LM/m)	Standard Length	Remark
AFT1312U- 9XX24 CSW025CCXXXX -GV10-ENP-ESD	2700K	2600-2830K	>90	24V	0.4 (0.12A/ft)	10 (3.05W/ft)	11 (3.35W/ft)	667(203/ft)	10000mm (32.81ft)	
	3000K	2920-3170K						752(229/ft)		
	4000K	3770-4220K						824(251/ft)		
AFT1312UL- 9XX24 CSW025CCXXXX -GV10-ENP-ESD	2700K	2600-2830K	>90	24V	0.2 (0.06A/ft)	5 (1.53W/ft)	5.5 (1.68W/ft)	360(110/ft)	15000mm (49.21ft)	16LED/50mm
	3000K	2920-3170K						370(113/ft)		
	4000K	3770-4220K						415(127/ft)		
AFT1312U- 0X24CSW025CC XXXX-GV10-ENP-ESD	G/B	/	/	24V	0.4 (0.12A/ft)	10 (3.05W/ft)	11 (3.35W/ft)	/	10000mm (32.81ft)	
AFT1312U- 9XX48 CSW025CCXXXX -GV10-ENP-ESD	2700K	2600-2830K	>90	48V	0.2 (0.06A/ft)	10 (3.05W/ft)	11 (3.35W/ft)	687(209/ft)	20000mm (65.62ft)	32LED/100mm
	3000K	2920-3170K						714(218/ft)		
	4000K	3770-4220K						769(234/ft)		

Note:

- The above parameters are tested based on 1m/3.28ft standard products;
- The luminous flux is allowed to have an error range of ±15%;
- The above parameters are typical values;

[Light Distribution]

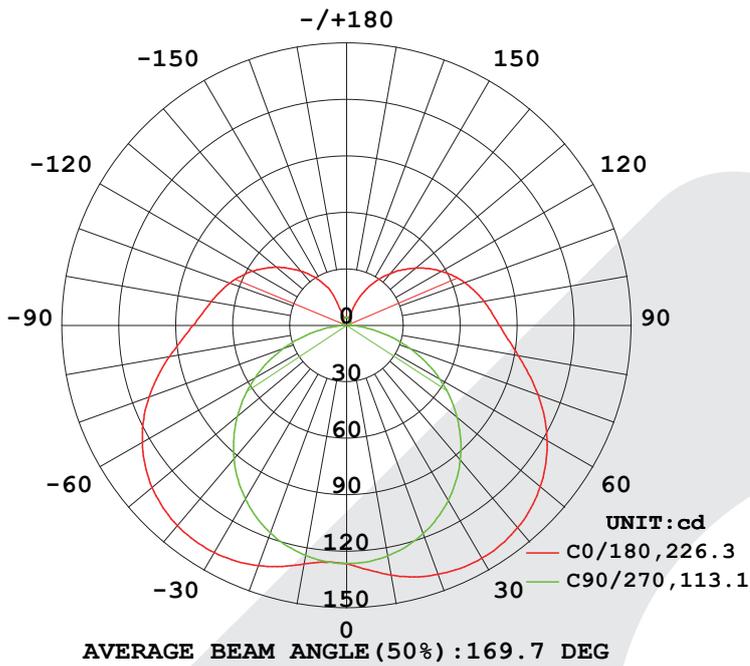

Light distribution

Flux out: 555.9 lm

Height	Eavg, Emax	Angle: 169.70deg	Diameter
1m	1.354, 129.01x		2219.08cm
2m	0.3386, 32.261x		4438.16cm
3m	0.1505, 14.341x		6657.25cm
4m	0.0846, 8.0651x		8876.33cm
5m	0.0542, 5.1621x		11095.41cm
6m	0.0376, 3.5841x		13314.49cm
7m	0.0276, 2.6341x		15533.58cm
8m	0.0212, 2.0161x		17752.66cm
9m	0.0167, 1.5931x		19971.74cm
10m	0.0135, 1.2901x		22190.82cm




Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Effective average illuminance

Note: The above data is based on 24V monochrome 4000K color temperature. If you need other models of IES files, please download the corresponding models from the IES database.



[Product mechanical parameters]

• IP65 Glued cap-side outlet

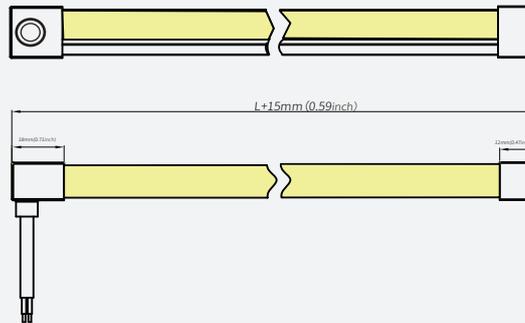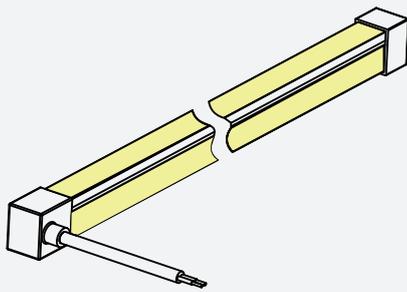

2PIN



• IP67 No dark cap(ENP)-bottom outlet

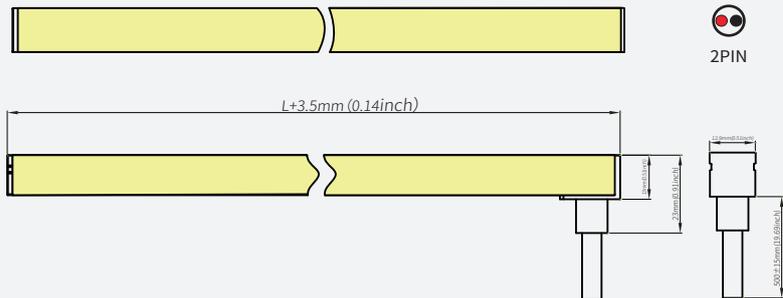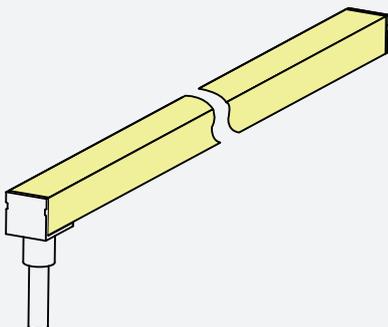


2PIN

[Product mechanical parameters]

• IP67 No dark cap(ENP)-side outlet(white light)





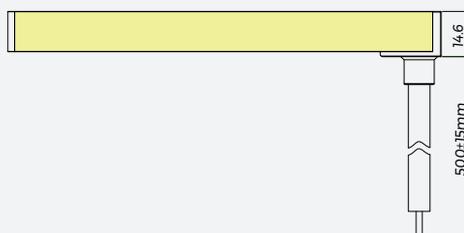
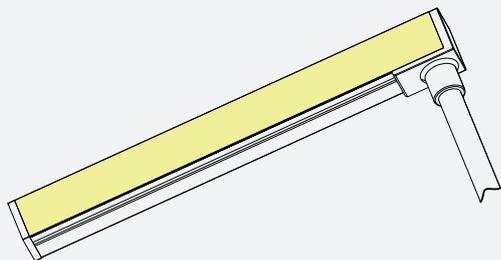


• IP54 Weld-free waterproof End-Cap - top outlet





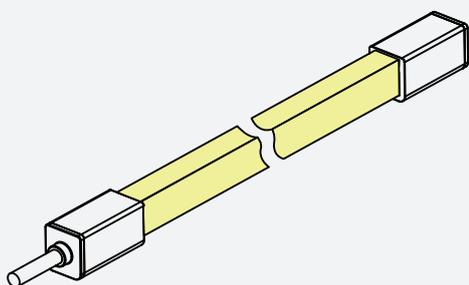


2PIN

[Accessory information]

name	describe	Accessories Picture	Section size	Order model	quantity/ case (PCS)	net weight (kg)	Per box net weight (kg)	Gross weight (kg)	Gross weight (mm)	Remark
PC carrier	Flat mount PC slot			AS-NMT1312P-1000	60	0.066	3.96	5	1180*125*115	Size: L1000*W15.4*H14.6mm With screws
PC card	Flat mount PC clip			AS-NMT1312P-25	350	0.004	1.4	1.655	250*250*150	Size: L25*W15.4*H14.6mm With screws
Weld-free waterproof End-Cap	Quick connector (out let from the top direction)			AS-NMT1312HT0-FL	48	0.04	1.92	3.735	365x365x190	outlet 500mm\IP65 suit to:AFT1312/AFT1312U/ AHT1312/AHT1312U/NMT1312/ NMT1312U white light and color light
Weld-free waterproof End-Cap	Quick connector (out let from the bottom direction)			AS-NMT1312HB0-FL	48	0.04	1.92	3.735	365x365x190	outlet 500mm\IP65 suit to:AFT1312/AFT1312U/ AHT1312/AHT1312U/NMT1312/ NMT1312U white light and color light
Weld-free waterproof End-Cap	Quick connector (out let from the left direction)			AS-NMT1312HL0-FL	48	0.04	1.92	3.735	365x365x190	outlet 500mm\IP65 suit to:AFT1312/AFT1312U/ AHT1312/AHT1312U/NMT1312/ NMT1312U white light and color light
Weld-free waterproof End-Cap	Quick connector (out let from the right direction)			AS-NMT1312HR0-FL	48	0.04	1.92	3.735	365x365x190	outlet 500mm\IP65 suit to:AFT1312/AFT1312U/ AHT1312/AHT1312U/NMT1312/ NMT1312U white light and color light
Weld-free waterproof End-Cap	Quick connector(plug)			AS-NMT1312TX0-FL	48	0.03	1.44	3.255	365x365x190	IP65 suit to:AFT1312/AFT1312U/ AHT1312/AHT1312U/NMT1312/ NMT1312U white light and color light
Weld-free waterproof connector	Quick connector (wit hout wire)			AS-NMT1312MX0-FL	96	0.026	2.496	2.75	365x365x190	IP65 suit to:AFT1312/AFT1312U/ AHT1312/AHT1312U/NMT1312/ NMT1312U white light and color light
Weld-free waterproof connector	Quick connector (wit h wire)			AS-NMT1312MH0-FL	48	0.053	2.544	2.8	365x365x190	The middle wire is 300mm long, IP65 suit to:AFT1312/AFT1312U/ AHT1312/AHT1312U/NMT1312/ NMT1312U white light and color light
Glue	Acid glue		/	AS-PG-0002	150	0.014	2.1	2.4	250*250*150	10ml/pcs
wire	2P PVC wire (0.5M)		/	AS-WS-0001	150	0.01541	2.31	2.61	250*250*150	Suitable for single color strip

[Accessory information]

name	describe	Accessories Picture	Section size	Order model	quantity/	net	Per box	Gross	Gross	Remark
					case	weight	net	weight	weight	
					(PCS)	(kg)	(kg)	(kg)	(mm)	
wire	2P PVC wire (2M)		/	AS-WS-0002	125	0.0616	7.7	8	250*250*150	Suitable for single color strip
connector	2PIN IP68 Waterproof connector			AS-FC-0001	512	0.016	8.192	9.5	365*365*190	Suitable for single color strip
wire	2P T-Connection Wire		/	AS-FC-0027	20	0.065	1.31	1.6	250*250*150	Suitable for monochromatic led strip Wire length 150mm, IP67
wire	2P male connector wire		/	AS-FC-0009(0.25M) AS-FC-0010(0.5M) AS-FC-0011(2M)	200 200 50	0.0193 0.031 0.1012	3.86 6.2 5.06	4.16 6.5 5.36	250*250*150	suitable for monochromatic led strip Wire lengths are optional: 0.25M/0.5M/2M
wire	2P female connector wire		/	AS-FC-0012 (0.25M) AS-FC-0013(0.5M) AS-FC-0014(2M)	200 200 50	0.0212 0.0329 0.1031	4.24 6.58 5.16	4.54 6.88 5.48	250*250*150	suitable for monochromatic led strip Wire lengths are optional: 0.25M/0.5M/2M
End cap set	End cap set, including end cap and plug (outlet from the bottom direction)			AS-NMT1312GD0-EC	400	0.0035	1.4	1.7	250*250*150	/
End cap set	End cap set, including end cap and plug (outlet from the top direction)			AS-NMT1312GH0-EC	400	0.0035	1.4	1.7	250*250*150	/
End cap set	End cap set, including end cap and plug (outlet from the side direction)			AS-NMT1312GS0-EC	400	0.0035	1.4	1.7	250*250*150	/


[Product control system solutions]

Product Image	product name	Product number	Product specifications	Applicable Products
	Monochrome remote	R6-1	output signal : RF Working voltage: 3VDC(CR2032) Remote control distance: 30m Working temperature: Ta: 0-30 °C-0+55 °C	Monochrome light strip (Use with CR1-GBA)
	Monochrome light controller	CR1-GBA	Input voltage: DC12-48V Output current: 15A@12V/24V, 10A@36V/48V Output Power: Max 180W@12V/Max 360W@24V/Max 360W@36V/Max 480W@48V Working temperature: -30°C— +55°C	Monochrome light strip (Use with R6-1)


[Packaging Solutions]

· standard packaging

1. Line marking, the line marking is affixed at a distance of 80mm from the end of the line;



Voltage & bending warning signs






2. Put the product information label on the back of the static bag inside the marking line;



Product Information Label




3. Put the light strip into an electrostatic bag, one roll per bag, and seal the bag;



4. Label the carton and pack it into the carton;



5. Pack 4 boxes of products in the carton;



6. Put the product information label and the box number label on the side of the carton, and the QC inspection stamp;



Product Information Label

Box number label




Model	Product size	Product Quantity/ box	Product Quantity/ case	Product net weight (kg)	Net weight per box (kg)	Gross weight (kg)	Carton size (m)
AFT1312U-9XX24CSW050CCXXX	L10000*13*12mm	10M*2	80M	1.72	13.76	15.31	0.41*0.41*0.26
AFT1312UL-9XX24CSW050CCXXX	L15000*13*12mm	15M*1	60M	2.58	10.32	11.87	0.41*0.41*0.26
AFT1312U-0X24CSW050CCXXX	L10000*13*12mm	10M*2	80M	1.72	13.76	15.31	0.41*0.41*0.26
AFT1312U-9XX48CSW050CCXXX	L20000*13*12mm	20M*1	80M	3.44	13.76	15.31	0.41*0.41*0.26

[Reliability test]

test item	Classification	Reference	Test method or condition
Safety test	Mechanical strength	IEC 60598-1; IEC 60598-2-21	The hammer spring Impact energy 0.7J
	IP	IEC 60598-1; IEC 60598-2-21	IP67
	Winding Test	IEC 60598-1; IEC 60598-2-21	φ150mm cylinder, 60N pull, winding 10 times at (-25°C ±2°C), and 10 times after(-15°C±2°C, 16h).
	Cold Bend Test	IEC 60598-1; IEC 60598-2-21	wound on mandrel, low-temperature (-15°C±2°C, 16h), around the mandrel for two turns
	Cold Impact test	IEC 60598-1; IEC 60598-2-21	Low-temperature (-15°C±5°C, 16h), hammer falls from a height of 100mm.
	Insulation Resistance	IEC 60598-1; IEC 60598-2-21	≤ 2MΩ
	Electrical strength	IEC 60598-1; IEC 60598-2-21	500V
Mechanical reliability testing	Bending test	Colors	Each 200mm, bending up and down 100 times
	Bending test	Colors	Each 200mm, bending left and right 100 times
	Torsion test	Colors	Twist clockwise 5 times and then release, repeat 200 times
	Disassembly and assembly test	Colors	Repeat disassembly and assembly, 10 times
Environment Reliability testing	High temperature storing test	IEC 60068-2-2	80°C, 168h
	Low temperature storing test	IEC 60068-2-1	-40°C, 168h
	High temperature and Humidity impact	IEC 60068-2-78	60°C, 85%RH
	Salt Spray test	IEC 60068-2-11	5% salt solution concentration, 24h
	IK	IEC 62262	5 times of impact on each exposed surface
	Lifetime aging test	Colors	35°C, 6000h
	switch test	Colors	10s On, 10s Off, 10000 times

[Precautions]

- Please use an isolated power supply to drive the LED light bar, and the ripple of the constant voltage source is less than 5%. Do not use resistance-capacitance step-down, non-isolated power supplies to drive the LED light bar.
- In actual applications, the power supply should reserve 20% of the margin (it is recommended to use only 80% of the power) to ensure sufficient voltage to drive the product.
- Please operate carefully, do not touch the AC power terminal when the power is on to prevent electric shock.
- Pay attention to the positive and negative poles of the power cord, and do not connect it wrongly. Whether the voltage of the power supply and the product are the same, so as to avoid damage to the product.
- During the installation process, please avoid scratching, twisting and irregular bending of the product, otherwise it may cause irreparable damage to the product.
- In order to ensure the life and reliability of the light strip, please do not bend it in an arc with a radius of less than 60mm. A too small bending radius will damage the product itself.
- If the actual application length exceeds the specified use length, it will cause the lamp belt to overload and heat, and the brightness is uneven.
- In order to prevent your eyes from being hurt, try to avoid staring at the light-emitting surface of the light bar for a long time.
- Non-professionals are prohibited from installing, disassembling and repairing the product.
- It is strictly forbidden to use any acidic or alkaline adhesives to fix products (including but not limited to glass glue, etc.).
- IP67 protection products are not suitable for swimming pool underwater.
- Products of different sizes and specifications under the same color temperature value due to structural differences, the final color of the product is slightly deviated, and it must be confirmed before use.
- When the IP67 protection product is installed and applied, the waterproof level needs to be downgraded after self-processing and cutting.
- Please use professional cutting tools when cutting.
- Engineering packaging neon light belt (20~50m), please use pay-off rack during construction to avoid damage to the product caused by pulling force.
- Attention, there are 2 soldering parts per reel (5m/reel) at most when mass production.
- Due to the characteristics of the silicone material, it is normal for the color of the colloid to change slightly after the neon product is used for a long time
- It is strictly forbidden to use 502/705 and other adhesives that are prone to chemical reactions with silica gel during construction and installation. It is recommended to use silicone sealant for bonding
- Long-term storage and the remaining products after cutting and use must be sealed to avoid exposure to organic environments such as aldehydes/benzenes
- When the product is installed and used, it is recommended that the product as a whole be in the same environmental conditions to avoid inconsistent color changes of the product colloid due to differences in product exposure and environmental conditions
- When using dimmer and dimming power supplies like Triac, etc., conduct compatibility tests on the product, dimmers and power supplies to ensure full compatibility. If any issues arise, contact COLORS for technical support.

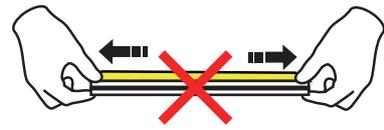

No stretching



No distortion



No trampling