


AF Series Specification

AFT1615

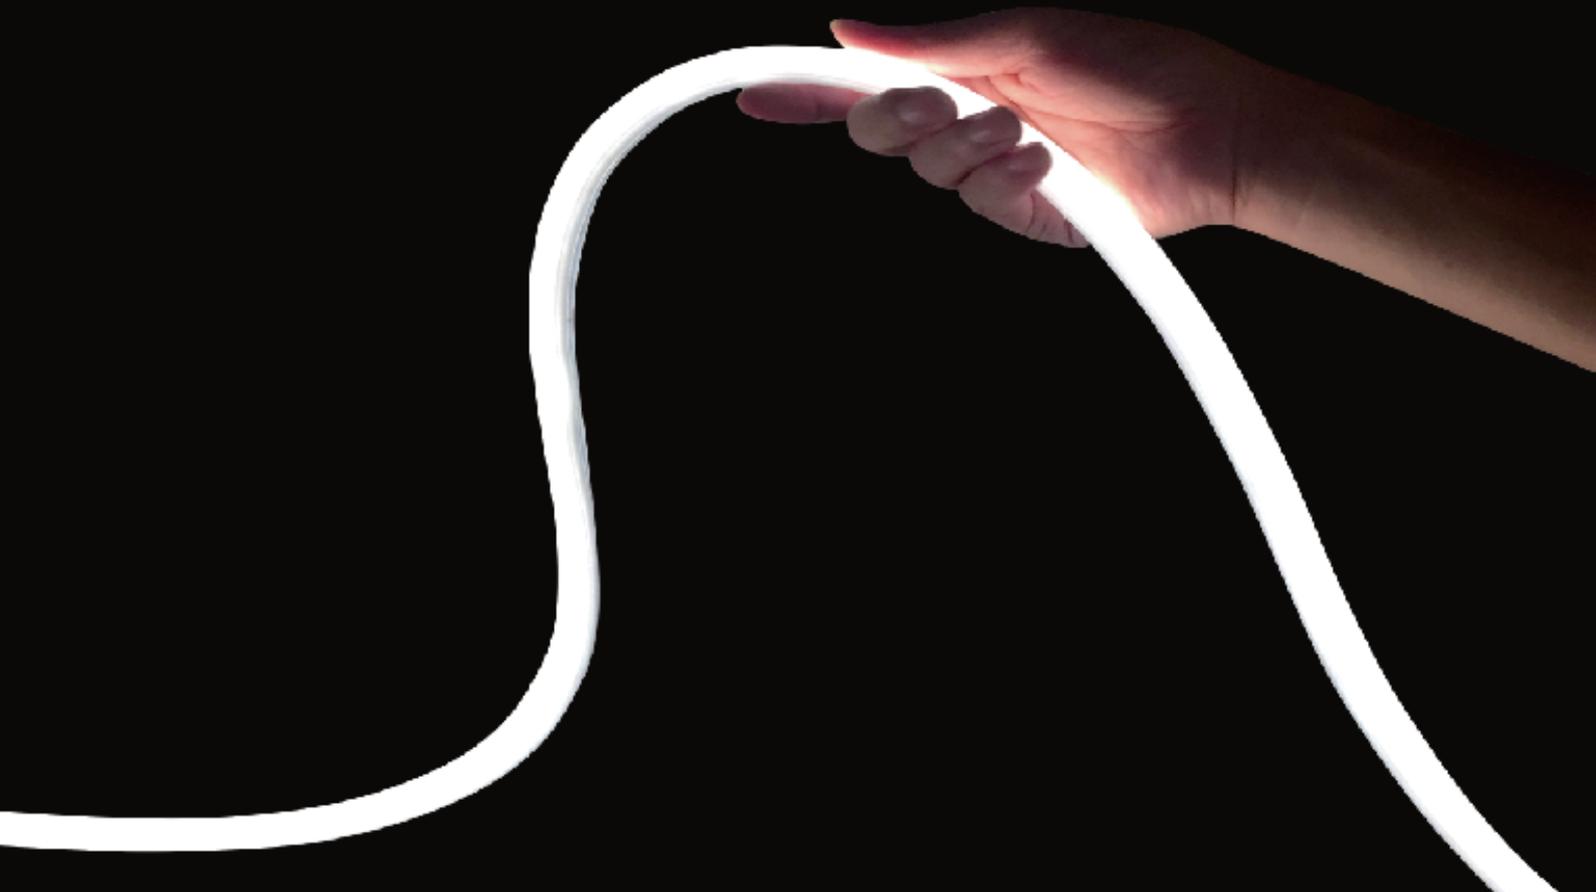

[Features]

Light source: Adopting dedicated and outdoor-specific LED, stronger reliability for outdoor application; Finished product ANSI SDCM≤5;

Structure: New anti-tension structure, Integrated anti-tension silicone extrusion process, against internal stress and external tension;

White light double-layer circuit conductive, double power supply guarantee, broken boards without power cut;

DMX Chip model and pixel count: white light/ RGB/RGBW: UCS512H4LB,12 Pixels/m;

Product applications: outdoor illumination, architectural facade lighting; IP67



Working/storage temperature(White/monochromatic light): Ta: -40~60°C / 0~60°C

Symphony working/storage temperature(DMX/RGB/RGBW): Ta: -40~50°C / 0°C~60°C

White with 7 years warranty or working life =84000H, whichever

comes first; RGB/RGBW/RGBM/RGBWM/White(DMX) with warranty 5 years or working

life=60000H, whichever comes first.

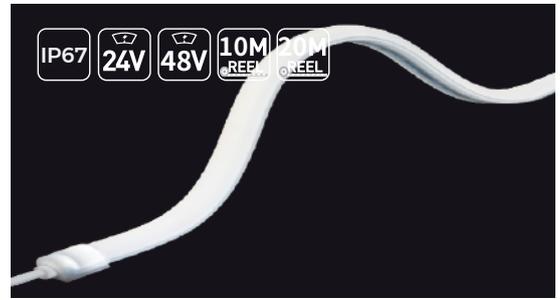


Note: White/RGB/RGBW light bending radius R≥60mm(2.36inch), DMX bending radius R≥80mm(3.15inch)

[Basic Parameters]

Model	CCT/colors	Color range	CRI	Input voltage (V)	Rated current (A/m)	Rated power (w/m)	Maximum power (w/m)	Lumens (LM/m)	Standard Length	Remark
AFT1615-9XX24CSW025CC XXXX-GV10-ENP-ESD	2700K	2600-2830K	>90	24	0.4 (0.12A/ft)	10 (3.05W/ft)	11 (3.35W/ft)	708 (216LM/ft)	10000mm (32.81ft)	16LED/50mm
	3000K	2920-3170K						748 (228LM/ft)		
	4000K	3770-4220K						834 (254LM/ft)		
AFT1615L-9XX24CSW025CC XXXX-GV10-ENP-ESD	2700K	2600-2830K	>90	24	0.2 (0.06A/ft)	5 (1.53W/ft)	5.5 (1.68W/ft)	360 (110LM/ft)	15000mm (49.21ft)	16LED/50mm
	3000K	2920-3170K						390 (119LM/ft)		
	4000K	3770-4220K						420 (128LM/ft)		
AFT1615-0X24CSW025CC XXXX-GV10-ENP-ESD	G/B	/	/	24	0.4 (0.12A/ft)	10 (3.05W/ft)	11 (3.35W/ft)	/	10000mm (32.81ft)	16LED/50mm
AFT1615-0RGB24CSW025CC XXXX-GV10-ENP-ESD	RGB	/	/	24	0.5 (0.15A/ft)	12 (3.66W/ft)	13.2 (4.02W/ft)	/	5000mm (16.4ft)	6*3LED/50mm
AFT1615-0RGBXW24CSW025CC XXXX-GV10-ENP-ESD	RGB+2700K	RGB+(2550-2800K)	/	24	0.5 (0.15A/ft)	12 (3.66W/ft)	13.2 (4.02W/ft)	144 (44LM/ft)	5000mm (16.4ft)	7*4LED/83.3mm
	RGB+3000K	RGB+(2800-3200K)						168 (51LM/ft)		
	RGB+4000K	RGB+(3900-4350K)						170 (52LM/ft)		
AFT1615-9XWM24CSW025CC XXXX-GV10-ENP-ESD	2700K	2550-2800K	>90	24	0.6 (0.18A/ft)	13.5 (4.12W/ft)	14.8 (4.51W/ft)	518 (158LM/ft)	5000mm (16.4ft)	7*3LED/83.3mm DMX-IC: UCS512H4LB 12 Pixels/m
	3000K	2800-3200K						659 (201LM/ft)		
	4000K	3900-4350K						653 (199LM/ft)		
AFT1615-0RGBM24CSW025CC XXXX-GV10-ENP-ESD	RGB	/	/	24	0.6 (0.18A/ft)	13.5 (4.12W/ft)	14.8 (4.51W/ft)	/	5000mm (16.4ft)	7*3LED/83.3mm UCS512H4LB 12 Pixels/m
AFT1615-0RGBXWM24CSW025 CCXXXX-GV10-ENP-ESD	RGB+2700K	RGB+(2550-2800K)	/	24	0.7 (0.21A/ft)	16.5 (5.03W/ft)	18.1 (5.52W/ft)	168 (51LM/ft)	5000mm (16.4ft)	7*4LED/83.3mm DMX-IC: UCS512H4LB 12 Pixels/m
	RGB+3000K	RGB+(2900-3250K)						210 (64LM/ft)		
	RGB+4000K	RGB+(3900-4350K)						214 (65LM/ft)		
AFT1615-9XX48CSW025CC XXXX-GV10-ENP-ESD	2700K	2600-2830K	>90	48	0.21 (0.06A/ft)	10 (3.05W/ft)	11 (3.35W/ft)	635 (194LM/ft)	20000mm (65.62ft)	32LED/100mm
	3000K	2920-3170K						680 (207LM/ft)		
	4000K	3770-4220K						770 (235LM/ft)		

[Light Distribution]

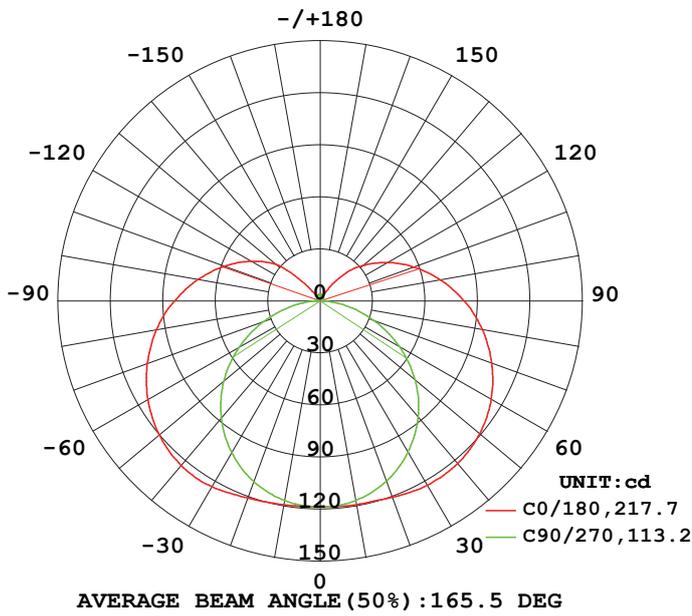

Light distribution

Flux out: 304.1 lm

Height	Eavg, Emax	Angle: 113.18deg	Diameter
1m	40.82, 119.01x		303.22cm
2m	10.21, 29.741x		606.45cm
3m	4.536, 13.221x		909.67cm
4m	2.551, 7.4341x		1212.90cm
5m	1.633, 4.7581x		1516.12cm
6m	1.134, 3.3041x		1819.35cm
7m	0.8331, 2.4281x		2122.57cm
8m	0.6379, 1.8591x		2425.79cm
9m	0.5040, 1.4691x		2729.02cm
10m	0.4082, 1.1901x		3032.24cm



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Effective average illuminance



Note: The above data is based on 24V monochrome 4000K color temperature. If you need other models of IES files, please download the corresponding models from the IES database.

[Product Mechanical Parameters]



• IP67 Full encapsulated cap(EP)-top outlet

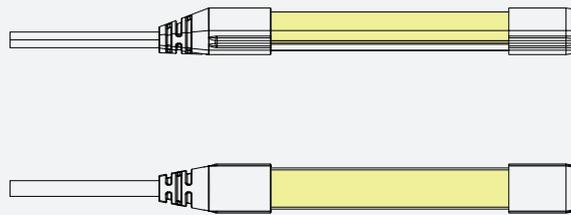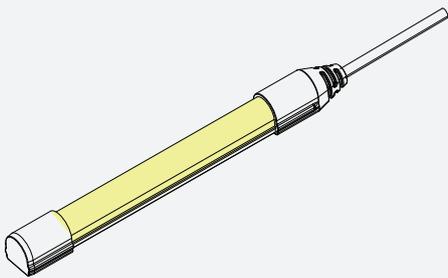

• IP67 No dark cap(ENP)- side outlet (white light)

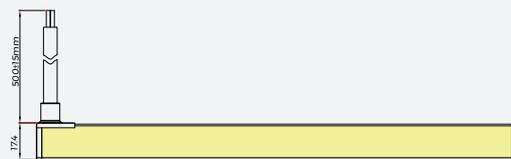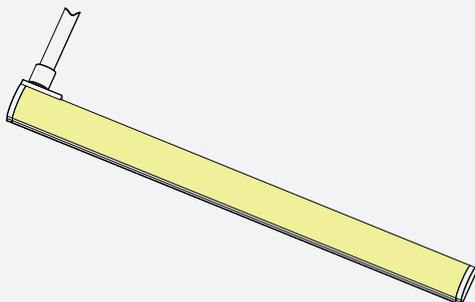

• IP67 No dark cap(ENP)- bottom outlet

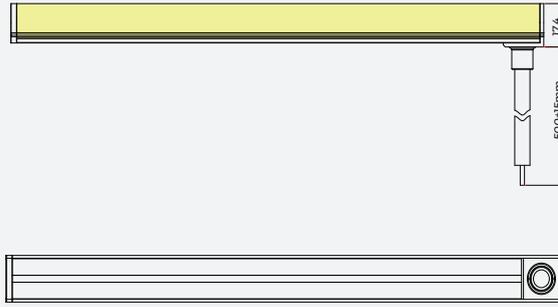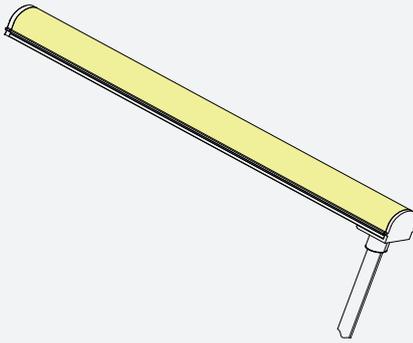

[Accessory Information]

Name	Description	Image	Sectional size	Ordering code	Quantity case (PCS)	net weight (kg)	Per box net weight (kg)	Gross weight (kg)	Packing (mm)	Remark
Alumina carrier	Flat mounting aluminum groove			AS-NNT1615A-1000	100	0.098	9.8	10.8	1180*125*115	Size: L1000*W17.8*H7.9mm with screws
Aluminum clip	Flat mounting of clip			AS-NNT1615A-25	800	0.0047	3.76	4.06	250*250*150	Size: L25*W17.8*H7.9mm with screws
Glue	588G acidic glue		/	AS-PG-0002	150	0.014	2.1	2.4	250*250*150	10ml/pcs
Wire	2P PVC Wire (0.5M)		/	AS-WS-0001	150	0.01541	2.31	2.61	250*250*150	Suitable for single light strip
Wire	2P PVC Wire (2M)			AS-WS-0002	125	0.0616	7.7	8		
Wire	4P PVC Wire (0.5M)		/	AS-WS-0003	150	0.0194	2.91	3.21	250*250*150	Suitable for RGB light strip
Wire	4P PVC Wire (2M)			AS-WS-0004	125	0.0776	9.7	10		

[Accessory Information]

Name	Description	Image	Sectional size	Ordering code	Quantity case (PCS)	net weight (kg)	Per box net weight (kg)	Gross weight (kg)	Packing (mm)	Remark
wire	5P PVC wire (0.5M)		/	AS-WS-0013	150	0.0195	2.925	3.364	250*250*150	Suitable for RGBW strip
wire	5P PVC wire (2M)			AS-WS-0014	125	0.0755	9.4375	10.86		
Connector	2PIN IP68 waterproof connector		/	AS-FC-0001	512	0.016	8.192	9.5	365*365*190	Suitable for single light strip
Connector	4PIN IP68 waterproof connector			AS-FC-0003	288	0.03	8.64	9.6		Suitable for RGB light strip
wire	2P T-Connection Wire		/	AS-FC-0027	20	0.065	1.31	1.6	250*250*150	Suitable for monochromatic led strip Wire length 150mm, IP67
wire	2P male connector wire		/	AS-FC-0009(0.25M)	200	0.0193	3.86	4.16	250*250*150	suitable for monochromatic led strip Wire lengths are optional: 0.25M/0.5M/2M
				AS-FC-0010(0.5M)	200	0.031	6.2	6.5		
				AS-FC-0011(2M)	50	0.1012	5.06	5.36		
wire	2P female connector wire		/	AS-FC-0012(0.25M)	200	0.0212	4.24	4.54	250*250*150	suitable for monochromatic led strip Wire lengths are optional: 0.25M/0.5M/2M
				AS-FC-0013(0.5M)	200	0.0329	6.58	6.88		
				AS-FC-0014(2M)	50	0.1031	5.16	5.48		
wire	4P T-Connection Wire		/	AS-FC-0028	20	0.068	1.35	1.65	250*250*150	suitable for RGB led strip Wire length 150mm
wire	4P male connector wire		/	AS-FC-0015(0.25M)	200	0.0196	3.92	4.22	250*250*150	suitable for RGB led strip Wire lengths are optional: 0.25M/0.5M/2M
				AS-FC-0016(0.5M)	200	0.0316	6.32	6.62		
				AS-FC-0017(2M)	50	0.1036	5.18	5.48		
wire	4P female connector wire		/	AS-FC-0018(0.25M)	200	0.0215	4.3	4.6	250*250*150	suitable for RGB led strip Wire lengths are optional: 0.25M/0.5M/2M
				AS-FC-0019(0.5M)	200	0.0354	7.08	7.38		
				AS-FC-0020(2M)	50	0.1188	5.94	6.24		
wire	5P T-Connection Wire		/	AS-FC-0029	20	0.069	1.39	1.69	250*250*150	suitable for RGBW led strip Wire length 150mm





[Accessory Information]

Name	Description	Image	Sectional size	Ordering code	Quantity case (PCS)	net weight (kg)	Per box net weight (kg)	Gross weight (kg)	Packing (mm)	Remark
wire	5P male connector wire		/	AS-FC-0021 (0.25M) AS-FC-0022(0.5M) AS-FC-0023(2M)	200 200 50	0.0196 0.0316 0.1036	3.92 6.32 5.18	4.22 6.62 5.48	250*250*150	suitable for RGBW/DMX led strip Wire lengths are optional: 0.25M/0.5M/2M
wire	5P female connector wire		/	AS-FC-0024 (0.25M) AS-FC-0025(0.5M) AS-FC-0026(2M)	200 200 50	0.0215 0.0354 0.1188	4.3 7.08 5.94	4.6 7.38 6.24	250*250*150	suitable for RGBW/DMX led strip Wire lengths are optional: 0.25M/0.5M/2M
wire	5P T-Connection Wire		/	AS-FC-0030	20	0.0698	1.396	1.696	250*250*150	suitable for DMX led strip Wire length 150mm

[Product control system solutions]

Product Image	product name	Product number	Product specifications	Applicable Products
	Monochrome remote	R6-1	output signal: RF Working voltage: 3VDC(CR2032) Remote control distance: 30m Working temperature: Ta: 0-30 °C-0+55 °C	Monochrome light strip (Use with CR1-GBA)
	Monotone light controller	CR1-GBA	Input voltage: DC12-48V Output current: 15A@12V/24V, 10A@36V/48V Output Power: Max 180W@12V/Max 360W@24V/Max 360W@36V/Max 480W@48V Working temperature: -30°C— +55°C	Monochrome light strip (Use with R6-1)
	RGB/RGBW remote control	R8-1	output signal: RF Working voltage: 3VDC(CR2032) Remote control distance: 30m Working temperature: Ta: 0-30 °C-0+55 °C	RGB/RGBW light strip (Use with CR3-GBA/CR4-GBA)
	RGB controller	CR3-GBA	Input voltage: DC12-48V Output current: 18A Output Power: Max 216W@12V/Max 432W@24V/Max 648W@36V/Max 864W@48V Working temperature: -30°C— +55°C	RGB light strip (Use with R8-1)
	RGBW controller	CR4-GBA	Input voltage: DC12-48V Output current: 20A Output Power: Max 240W@12V/Max 480W@24V/Max 720W@36V/Max 960W@48V Working temperature: -30°C— +55°C	RGBW light strip (Use with R8-1)
	Symphony Controller	K-8000C	Power supply: DC 5V-24V input Power consumption: 5W Working temperature: Ta: 0-20 °C-0+85 °C	DMX/SPI magic lights with universal

[Product Wiring Schematic]

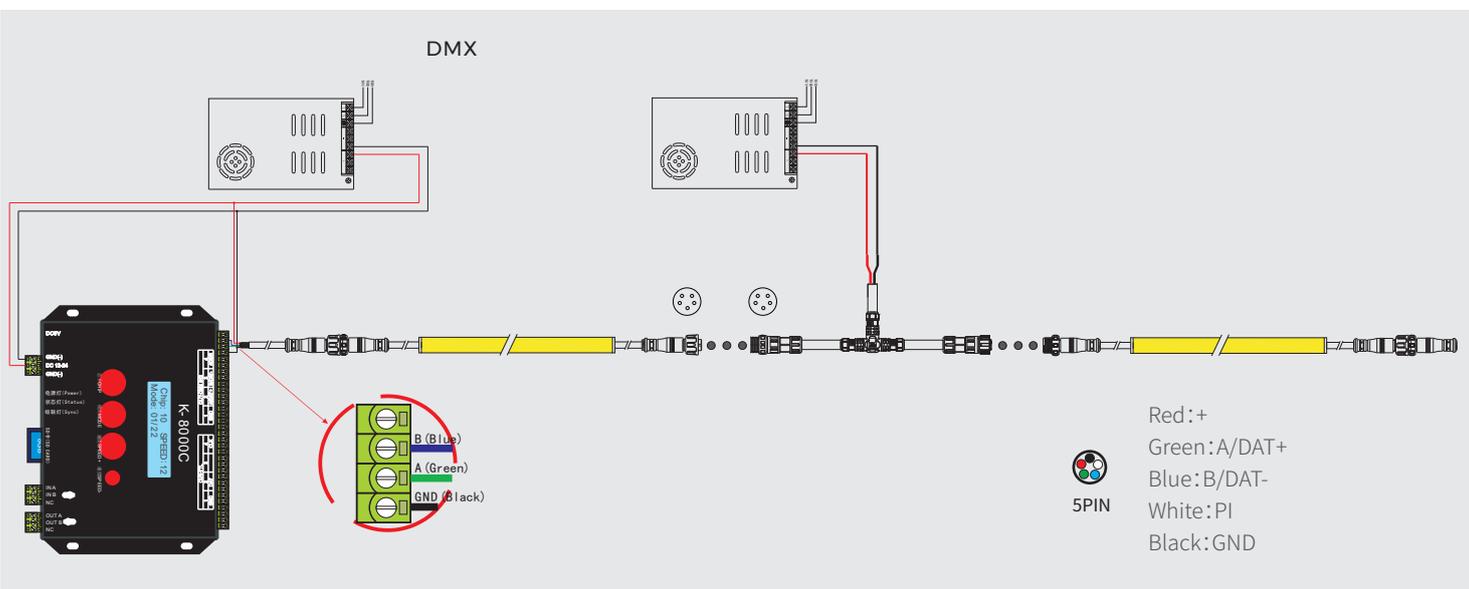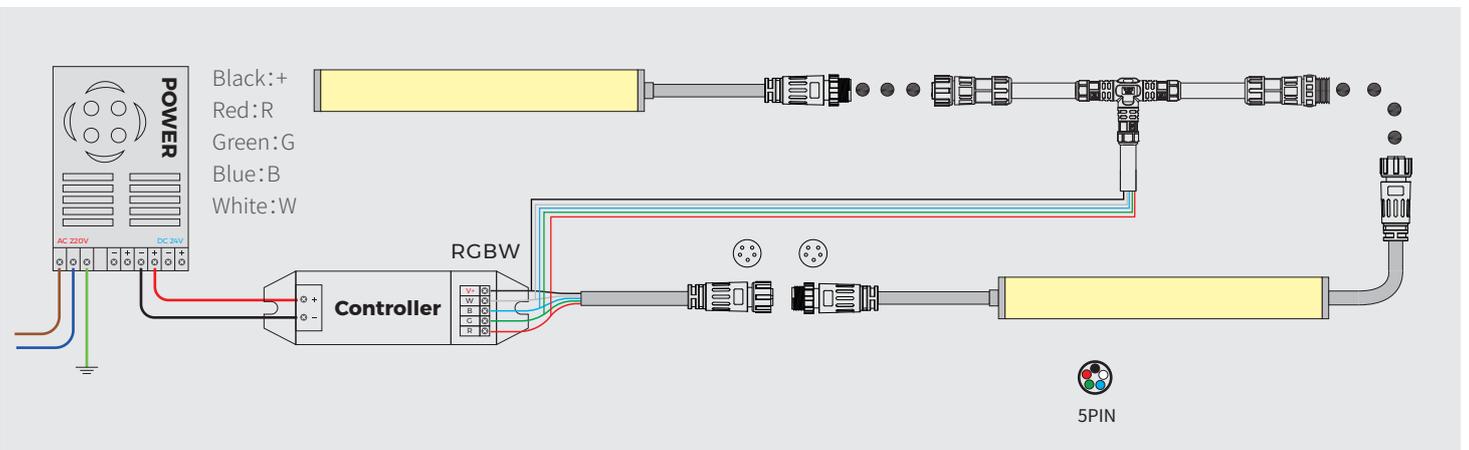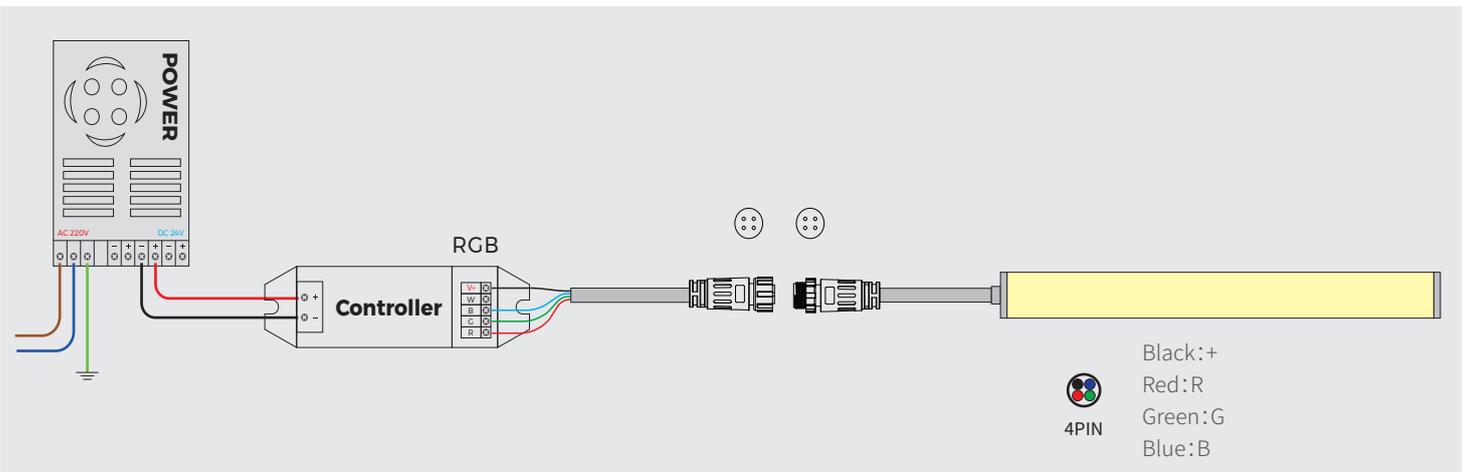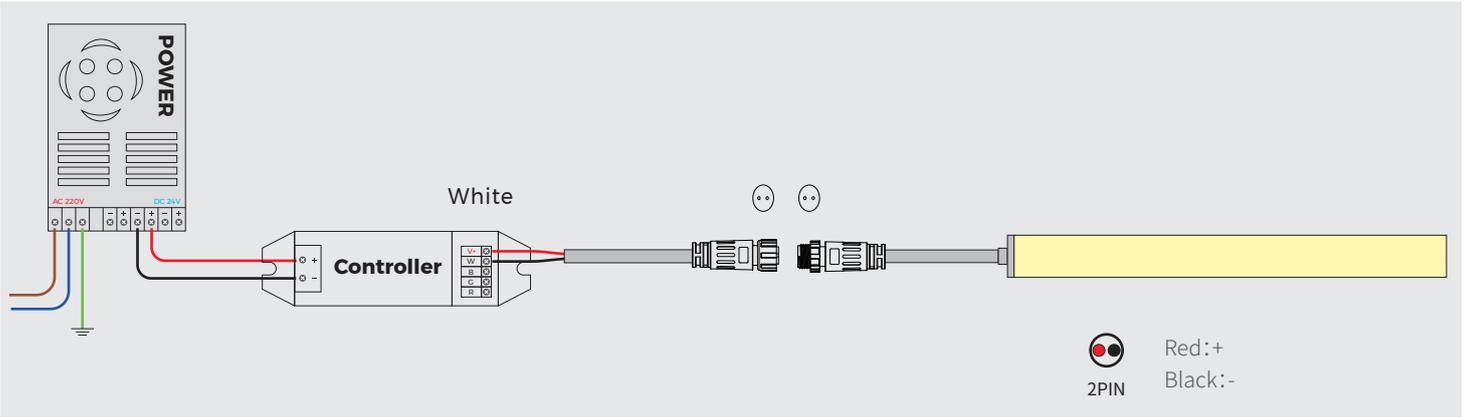

[Packaging Solutions]

• Standard Packaging


1. Line marking, the line marking is affixed at a distance of 80mm from the end of the line;



4. Label the carton and pack it into the carton



2. Put the product information label on the back back of the static bag inside the marking line;

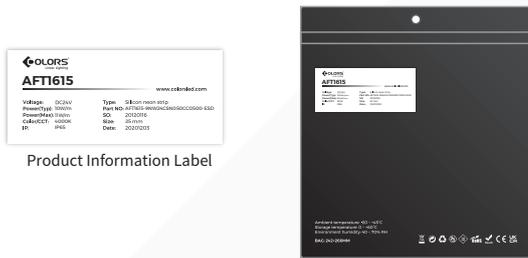

5. Pack 4 boxes of products in the carton



3. Put the light strip into an electrostatic bag, one roll per bag, and seal the bag;



6. Put the product information label and the box number label on the side of the carton, and the QC inspection stamp



Model	Product size	Product Quantity/box	Product Quantity/case	Product net weight (kg)	Net weight per box (kg)	Gross weight (kg)	Carton size (m)
AFT1615-9XX24CSW050CCXXX-GV10-ENP-ESD	L10000*16*15mm	10M*1	40M	1.9	7.6	9.24	0.41*0.41*0.26
AFT1615L-9XX24CSW050CCXXX-GV10-ENP-ESD	L15000*16*15mm	15M*1	45M	2.85	8.55	10.05	0.48*0.48*0.23
AFT1615-0X24CSW050CCXXX-GV10-ENP-ESD	L10000*16*15mm	10M*1	40M	1.9	7.6	9.24	0.41*0.41*0.26
AFT1615-9XX48CSW050CCXXX-GV10-ENP-ESD	L20000*16*15mm	20M*1	60M	3.8	11.4	12.9	0.48*0.48*0.23
AFT1615- ORGB24CSW025CCXXX-GV10-ENP-ESD	L5000*16*15mm	5M*3	60M	0.95	11.4	13.6	0.41*0.41*0.26
AFT1615- ORGBXW24CSW025CCXXX-GV10-ENP-ESD	L5000*16*15mm	5M*3	60M	0.95	11.4	13.6	
AFT1615- 9XWM24CDW025CCXXX-GV10-ENP-ESD	L5000*16*15mm	5M*3	60M	0.95	11.4	13.6	
AFT1615- ORGBM24CDW025CCXXX-GV10-ENP-ESD	L5000*16*15mm	5M*3	60M	0.95	11.4	13.6	
AFT1615- ORGBXWM24CDW025CCXXX-GV10-ENP-ESD	L5000*16*15mm	5M*3	60M	0.95	11.4	13.6	

[Reliability Test]

Test Item	Classification	Reference	Test method or condition
Safety test	Mechanical strength	IEC 60598-1; IEC 60598-2-21	The hammer spring Impact energy 0.35J
	IP	IEC 60598-1; IEC 60598-2-21	IP67
	Winding Test	IEC 60598-1; IEC 60598-2-21	φ150mm cylinder, 60N pull, winding 10 times at (-25°C ±2°C), and 10 times after(-15°C ±2°C, 16h).
	Cold Bend Test	IEC 60598-1; IEC 60598-2-21	wound on mandrel, low-temperature (-15°C ±2°C, 16h), around the mandrel for two turns
	Cold Impact test	IEC 60598-1; IEC 60598-2-21	Low-temperature (-15°C ±5°C, 16h), hammer falls from a height of 100mm.
	Insulation Resistance	IEC 60598-1; IEC 60598-2-21	≤ 2MΩ
	Electrical strength	IEC 60598-1; IEC 60598-2-21	500V
Mechanical reliability testing	Bending test	Colors	Each 200mm, bending up and down 100 times
	Bending test	Colors	Each 200mm, bending left and right 100 times
	Torsion test	Colors	Twist clockwise 5 times and then release, repeat 200 times
	Disassembly and assembly test	Colors	Repeat disassembly and assembly, 10 times
Environment Reliability testing	High temperature storing test	IEC 60068-2-2	80°C, 168h
	Low temperature storing test	IEC 60068-2-1	-40°C, 168h
	High temperature and Humidity impact	IEC 60068-2-78	60°C, 85%RH
	Salt Spray test	IEC 60068-2-11	5% salt solution concentration, 24h
	IK	IEC 62262	5 times of impact on each exposed surface
	Lifetime aging test	Colors	35°C, 6000h
	switch test	Colors	10s On, 10s Off, 10000 times

【Precautions】

· Use a 24V DC isolated power supply to drive the neon lamp strip and the ripple wave of constant voltage source shall be less than 5%. It is not allowed to use RC voltage reduction or non-isolated power supply to drive the neon lamp strip.

· In actual applications, 20% of the power supply shall be kept (only 80% of the power is used) to guarantee that sufficient voltage is available to drive the product.

· Attention shall be paid to safe operation. After powering on, it is not allowed to touch the AC power supply to avoid an electric shock.

· Attention shall be paid to the positive and negative poles of the wires during installation and whether the power supply conforms to required voltages to avoid damages.

· Avoid scratching, distortion and irregular bending of the product during installation; otherwise it may cause irreparable damage to the product.

· Please do not bend the strip into an arc with a diameter less than 30mm to ensure the longevity and reliability, the bending diameter too small will damage the product itself.

· If the actual length of application exceeds the specified using length, it will lead to overload heating and uneven brightness.

· To keep the eyes from being harmed, try to avoid staring at the glowing side of the LED strip for a long time.

· Non-professionals are prohibited from installing, disassembling and repairing the product.

· Do not use any acid or alkaline adhesive to fix products (including not limited to glass cement, etc.)

· Products with different IP grade should be used in different environments, the product with IP65 is not suitable for use in water-immersed environment .

· The final color of products with different sizes and specifications is slightly deviated due to structural differences under the same color temperature, which should be confirmed before use.

· Please use professional cutting tools when cutting.

· Attention, there are 2 soldering parts per reel (5m/reel) at most when mass production.

· Due to the characteristics of the silicone material, it is normal for the color of the colloid to change slightly after the neon product is used for a long time.

· It is strictly forbidden to use 502/705 and other adhesives that are prone to chemical reactions with silica gel during construction and installation. It is recommended to use silicone sealant for bonding.

· Long-term storage and the remaining products after cutting and use must be sealed to avoid exposure to organic environments such as aldehydes/benzenes.

· When the product is installed and used, it is recommended that the product as a whole be in the same environmental conditions to avoid inconsistent color changes of the product colloid due to differences in product exposure and environmental conditions.


· When using dimmer and dimming power supplies like Triac, etc, conduct compatibility tests on the product, dimmers and power supplies to ensure full compatibility. If any issues arise, contact COLORS for technical support.



No stretching



No distortion

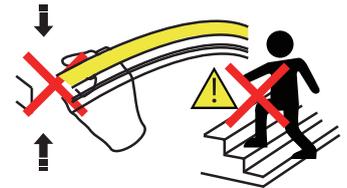

No trampling