
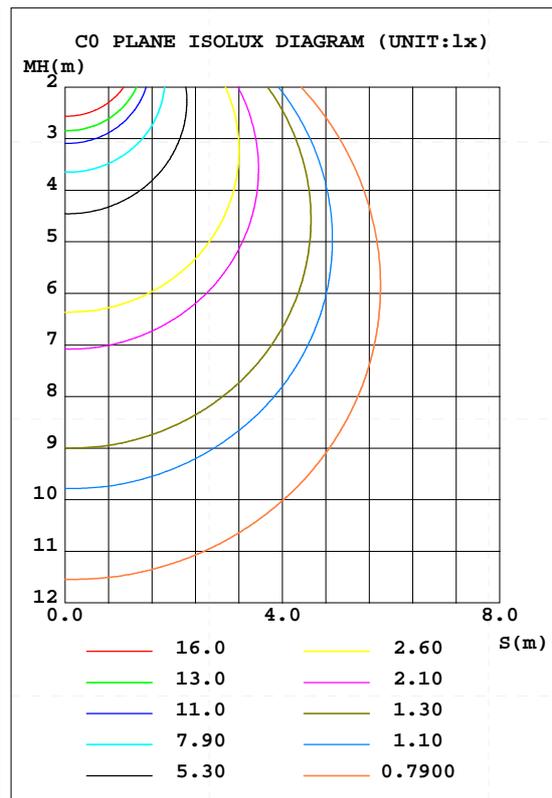


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.2700A P:6.650W PF:1.000 Freq:0Hz Lamp Flux:314.096x1 lm		
NAME: LE1410-LS1010	TYPE:	WEIGHT:
SPEC.:LE1410-LS1010	DIM.: 1000*10*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*10mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 47.23 lm/W
MODEL	LE1410-LS1010	I _{max} (cd)	105.5	S/MH(C0/180)	1.30	
NOMINAL POWER(W)	7	LOR(%)	100.0	S/MH(C90/270)	1.26	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	314.10	h UP, DN(C0-180)	0.9,50.6	
NOMINAL FLUX(lm)	314.096	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.7,47.8	
LAMPS INSIDE	1	h up(%)	1.6	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	24	h down(%)	98.4	CIBSE SHR MAX	1.35	

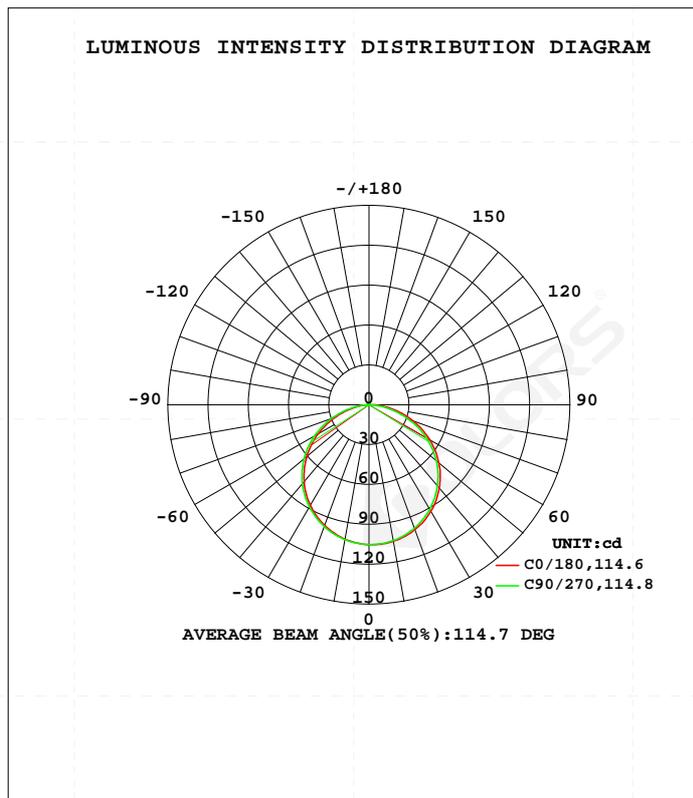

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

Page Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	104.4	104.5	103.8	103.1	102.7	102.6	103.1	104.0	0- 10	9.965	9.965	3.17,3.17
20	100.1	100.3	98.89	97.56	96.65	96.50	97.55	99.25	10- 20	28.61	38.58	12.3,12.3
30	92.51	92.78	90.74	88.77	87.54	87.26	88.94	91.27	20- 30	43.59	82.16	26.2,26.2
40	81.76	82.14	79.53	77.03	75.38	75.23	77.46	80.37	30- 40	52.96	135.1	43,43
50	68.17	68.65	65.61	62.47	60.62	60.63	63.34	66.77	40- 50	55.44	190.6	60.7,60.7
60	52.22	52.63	49.20	45.70	43.90	43.95	47.13	50.76	50- 60	50.57	241.1	76.8,76.8
70	34.67	34.68	31.05	27.45	26.04	26.08	29.33	33.15	60- 70	38.92	280.0	89.2,89.2
80	16.85	16.49	12.90	10.09	9.320	9.286	11.80	15.40	70- 80	22.52	302.6	96.3,96.3
90	2.926	2.387	0.4624	0.4400	0.3859	0.2388	0.0802	1.903	80- 90	6.596	309.2	98.4,98.4
100	0.4008	0.4009	0.3741	0.4145	0.3074	0.2200	0.2342	0.1939	90-100	0.4535	309.6	98.6,98.6
110	0.4741	0.5211	0.4675	0.5953	0.5611	0.4337	0.4879	0.3870	100-110	0.4144	310.0	98.7,98.7
120	0.7281	0.7752	0.7344	0.8287	0.7821	0.6478	0.6815	0.6145	110-120	0.6051	310.6	98.9,98.9
130	1.002	1.002	0.9550	1.009	1.022	0.8544	0.8684	0.8347	120-130	0.7538	311.4	99.1,99.1
140	1.241	1.176	1.162	1.136	1.189	1.042	0.9953	0.9418	130-140	0.7943	312.2	99.4,99.4
150	1.356	1.289	1.262	1.289	1.289	1.249	1.142	1.042	140-150	0.7340	312.9	99.6,99.6
160	1.489	1.369	1.416	1.436	1.383	1.376	1.410	1.182	150-160	0.6024	313.5	99.8,99.8
170	1.590	1.570	1.689	1.563	1.383	1.556	1.670	1.503	160-170	0.4151	313.9	100,100
180	1.530	1.810	1.823	1.810	1.490	1.810	1.870	1.810	170-180	0.1551	314.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.2700A P:6.650W PF:1.000 Freq:0Hz Lamp Flux:314.096x1 lm		
NAME: LE1410-LS1010	TYPE:	WEIGHT:
SPEC.:LE1410-LS1010	DIM.: 1000*10*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*10mm	Shielding Angle:

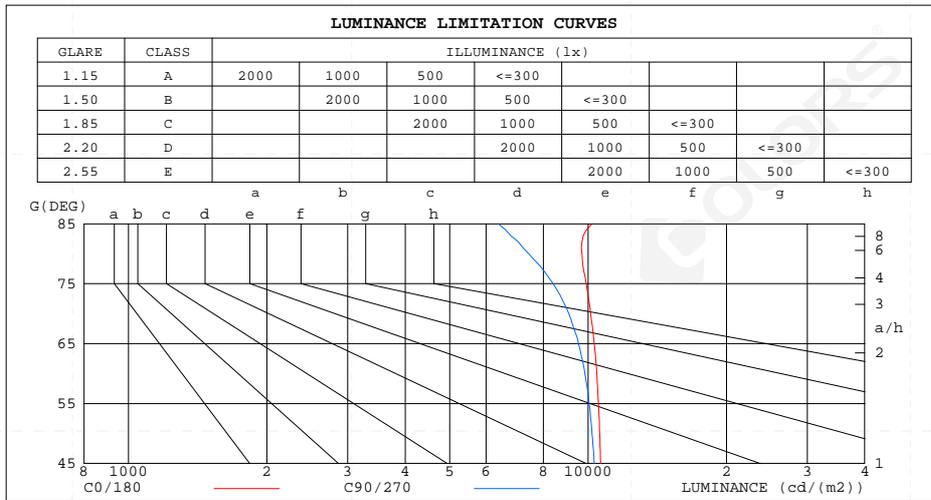

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	10210	6369
80	9704	7428
75	9908	8395
70	10136	9079
65	10320	9535
60	10445	9841
55	10537	10059
50	10606	10207
45	10647	10315


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

G Range: 0 - 180DEG
 G Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.2700A P:6.650W PF:1.000 Freq:0Hz Lamp Flux:314.096x1 lm		
NAME: LE1410-LS1010	TYPE:	WEIGHT:
SPEC.:LE1410-LS1010	DIM.: 1000*10*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*10mm	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.90	.83	.77	.88	.81	.76	.84	.79	.74	.80	.76	.72	.77	.73	.70	.68
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.65	.60	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.53	.65	.58	.52	.63	.57	.52	.61	.55	.51	.48
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.45	.56	.50	.45	.54	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.43	.39	.36
7.0	.51	.42	.35	.50	.41	.35	.48	.40	.35	.46	.40	.35	.45	.39	.34	.32
8.0	.46	.37	.32	.45	.37	.31	.44	.36	.31	.42	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

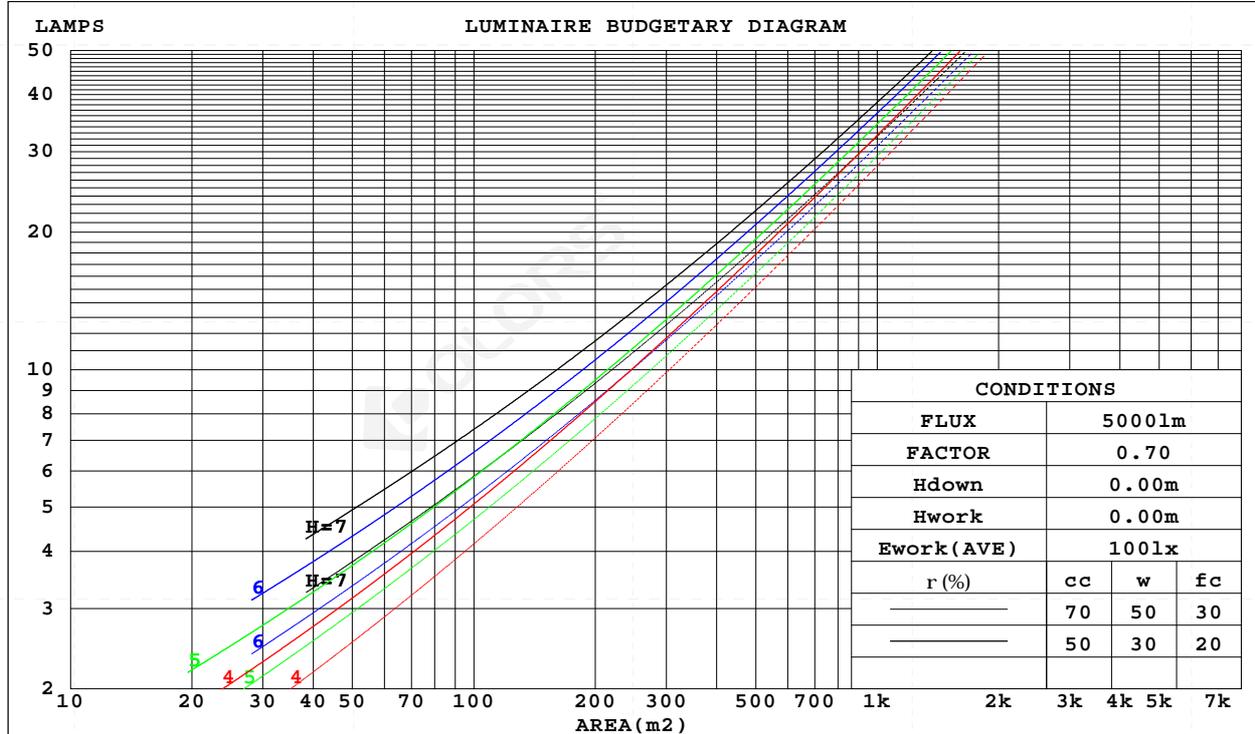

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.2700A P:6.650W PF:1.000 Freq:0Hz Lamp Flux:314.096x1 lm		
NAME: LE1410-LS1010	TYPE:	WEIGHT:
SPEC.:LE1410-LS1010	DIM.: 1000*10*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*10mm	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.314	.179	.057	.307	.175	.056	.292	.168	.054	.279	.161	.052	.267	.155	.050	
2.0	.295	.161	.050	.288	.159	.049	.275	.153	.048	.264	.148	.046	.253	.143	.045	
3.0	.272	.145	.043	.266	.143	.043	.255	.138	.042	.245	.134	.041	.235	.130	.040	
4.0	.251	.130	.038	.245	.128	.038	.236	.125	.037	.226	.122	.037	.218	.118	.036	
5.0	.232	.118	.034	.227	.116	.034	.218	.114	.033	.210	.111	.033	.202	.108	.032	
6.0	.215	.108	.031	.210	.106	.031	.203	.104	.030	.195	.101	.030	.188	.099	.029	
7.0	.200	.099	.028	.196	.098	.028	.189	.095	.027	.182	.093	.027	.176	.091	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.086	.025	.165	.085	.025	
9.0	.175	.084	.024	.171	.084	.023	.166	.082	.023	.160	.080	.023	.155	.079	.023	
10.0	.164	.079	.022	.161	.078	.022	.156	.076	.022	.151	.075	.021	.147	.074	.021	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.202	.202	.202	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.193	.168	.146	.165	.144	.126	.113	.099	.087	.065	.057	.051	.021	.018	.016	
2.0	.185	.144	.110	.158	.124	.095	.108	.086	.066	.063	.050	.039	.020	.016	.013	
3.0	.177	.127	.086	.152	.109	.075	.104	.076	.052	.060	.044	.031	.019	.014	.010	
4.0	.169	.113	.070	.145	.098	.061	.100	.068	.043	.058	.040	.025	.019	.013	.008	
5.0	.162	.103	.059	.139	.089	.052	.096	.062	.036	.056	.037	.022	.018	.012	.007	
6.0	.155	.095	.051	.133	.082	.045	.092	.057	.032	.053	.034	.019	.017	.011	.006	
7.0	.148	.088	.045	.127	.076	.040	.088	.053	.028	.051	.031	.017	.017	.010	.006	
8.0	.142	.082	.041	.122	.071	.036	.084	.050	.025	.049	.029	.015	.016	.010	.005	
9.0	.135	.077	.038	.117	.067	.033	.081	.047	.023	.047	.028	.014	.015	.009	.005	
10.0	.130	.073	.035	.112	.063	.030	.078	.044	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.2700A P:6.650W PF:1.000 Freq:0Hz Lamp Flux:314.096x1 lm										
NAME: LE1410-LS1010					TYPE:			WEIGHT:		
SPEC.:LE1410-LS1010					DIM.: 1000*10*10mm			SERIAL No.:		
MFR.: COLORS					SUR.:1000*10mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.3	26.8	25.6	27.0	27.3	25.1	26.6	25.4	26.8	27.1
3H	27.0	28.4	27.3	28.7	28.9	26.7	28.1	27.0	28.3	28.6
4H	27.7	29.1	28.1	29.3	29.6	27.3	28.6	27.6	28.9	29.2
6H	28.3	29.6	28.7	29.9	30.2	27.7	29.0	28.1	29.3	29.6
8H	28.5	29.7	28.9	30.0	30.4	27.8	29.1	28.2	29.4	29.7
12H	28.7	29.9	29.1	30.2	30.5	27.9	29.1	28.3	29.4	29.8
4H 2H	26.0	27.3	26.3	27.6	27.9	25.8	27.1	26.1	27.4	27.7
3H	27.8	29.0	28.2	29.3	29.7	27.6	28.7	27.9	29.1	29.4
4H	28.7	29.8	29.1	30.1	30.5	28.3	29.4	28.7	29.7	30.1
6H	29.4	30.4	29.9	30.8	31.2	28.9	29.8	29.3	30.2	30.6
8H	29.7	30.6	30.2	31.0	31.4	29.1	30.0	29.5	30.4	30.8
12H	30.0	30.8	30.4	31.2	31.6	29.2	30.0	29.7	30.4	30.9
8H 4H	29.0	29.9	29.5	30.3	30.7	28.7	29.6	29.1	30.0	30.4
6H	29.9	30.6	30.4	31.1	31.5	29.4	30.2	29.9	30.6	31.0
8H	30.3	31.0	30.8	31.4	31.9	29.7	30.4	30.2	30.8	31.3
12H	30.7	31.2	31.2	31.7	32.2	29.9	30.5	30.4	31.0	31.5
12H 4H	29.0	29.8	29.5	30.3	30.7	28.7	29.5	29.2	29.9	30.4
6H	30.0	30.6	30.5	31.1	31.6	29.5	30.2	30.0	30.6	31.1
8H	30.4	31.0	30.9	31.5	32.0	29.9	30.4	30.4	30.9	31.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 314.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -4.0)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.2700A P:6.650W PF:1.000 Freq:0Hz Lamp Flux:314.096x1 lm		
NAME: LE1410-LS1010	TYPE:	WEIGHT:
SPEC.:LE1410-LS1010	DIM.: 1000*10*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*10mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	57	45	38	56	45	38	54	44	38	31
0.80	67	55	47	65	54	47	64	53	47	40
1.00	75	64	56	74	63	56	71	64	55	48
1.25	82	71	64	81	71	64	78	69	63	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	79	92	84	78	88	82	76	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	101	94	89	99	93	88	95	90	85	76
4.00	106	100	95	103	98	93	98	94	91	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.2700A P:6.650W PF:1.000 Freq:0Hz Lamp Flux:314.096x1 lm		
NAME: LE1410-LS1010	TYPE:	WEIGHT:
SPEC.:LE1410-LS1010	DIM.: 1000*10*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*10mm	Shielding Angle:

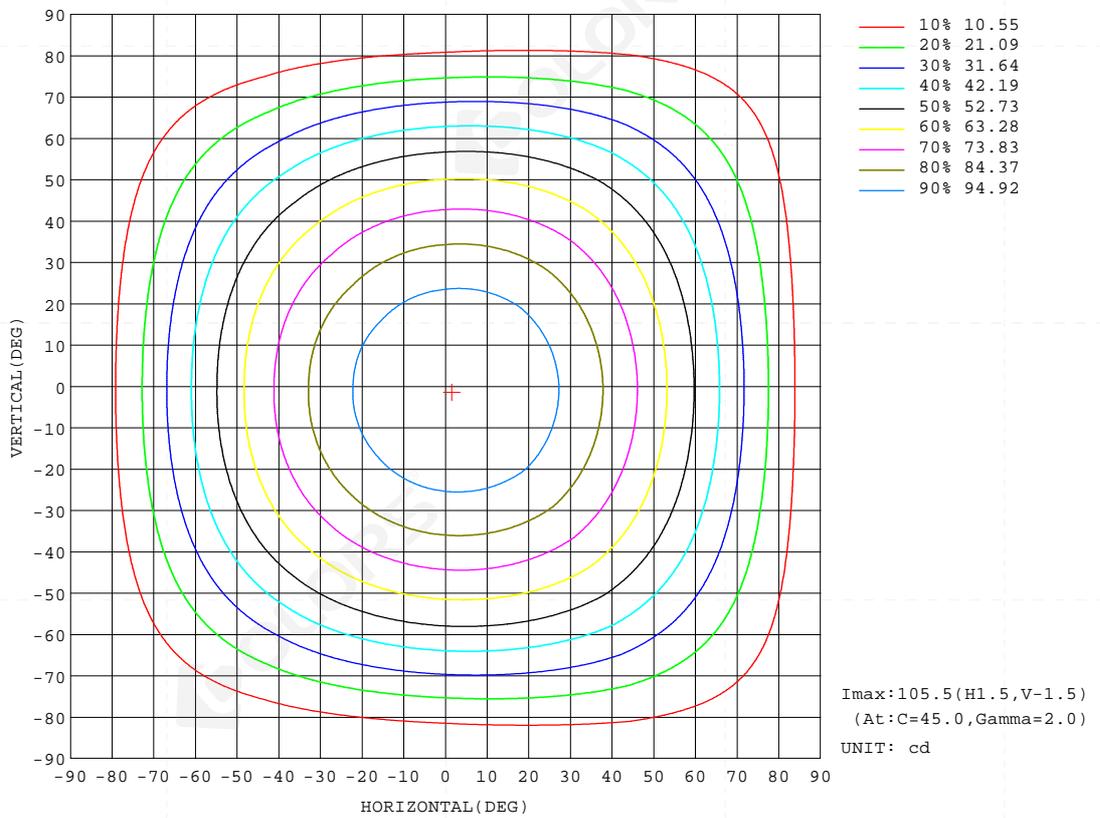


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

AAI Figure

Test:U:24.00V I:0.2700A P:6.650W PF:1.000 Freq:0Hz Lamp Flux:314.096x1 lm		
NAME: LE1410-LS1010	TYPE:	WEIGHT:
SPEC.:LE1410-LS1010	DIM.: 1000*10*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*10mm	Shielding Angle:

Flux out:231.7 lm

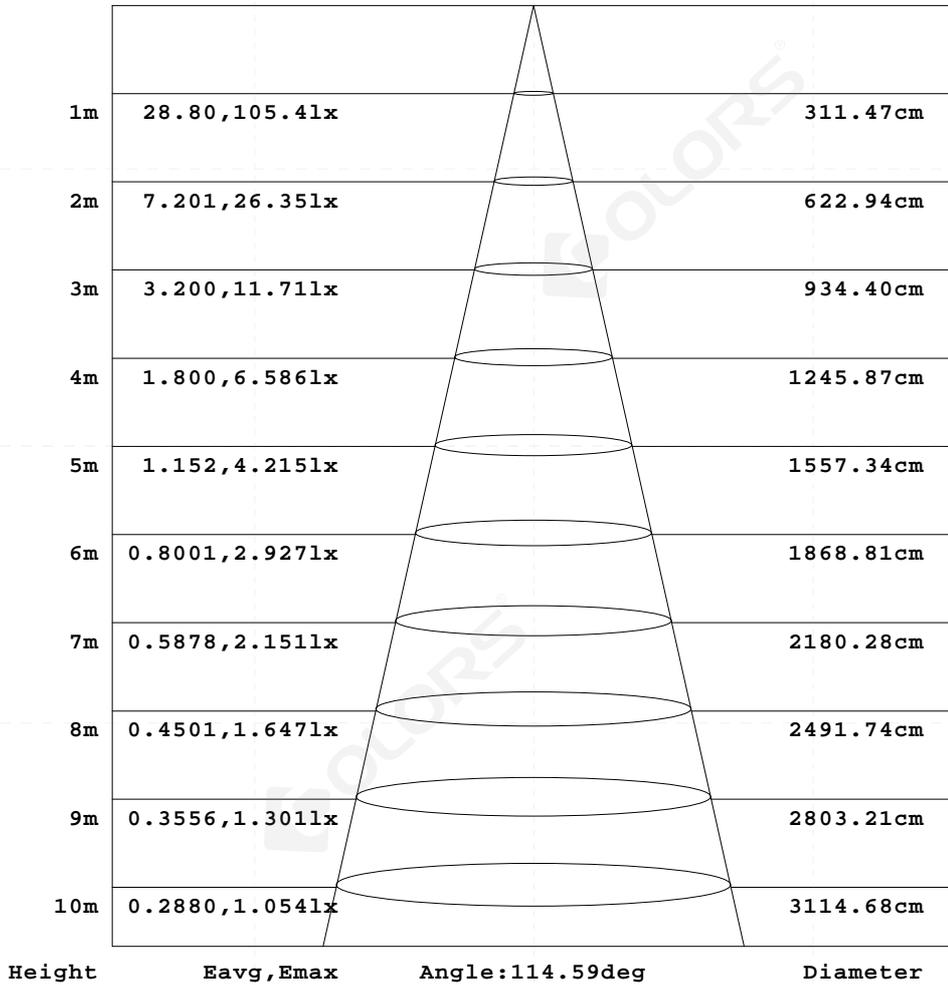


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.2700A P:6.650W PF:1.000 Freq:0Hz Lamp Flux:314.096x1 lm		
NAME: LE1410-LS1010	TYPE:	WEIGHT:
SPEC.:LE1410-LS1010	DIM.: 1000*10*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*10mm	Shielding Angle:

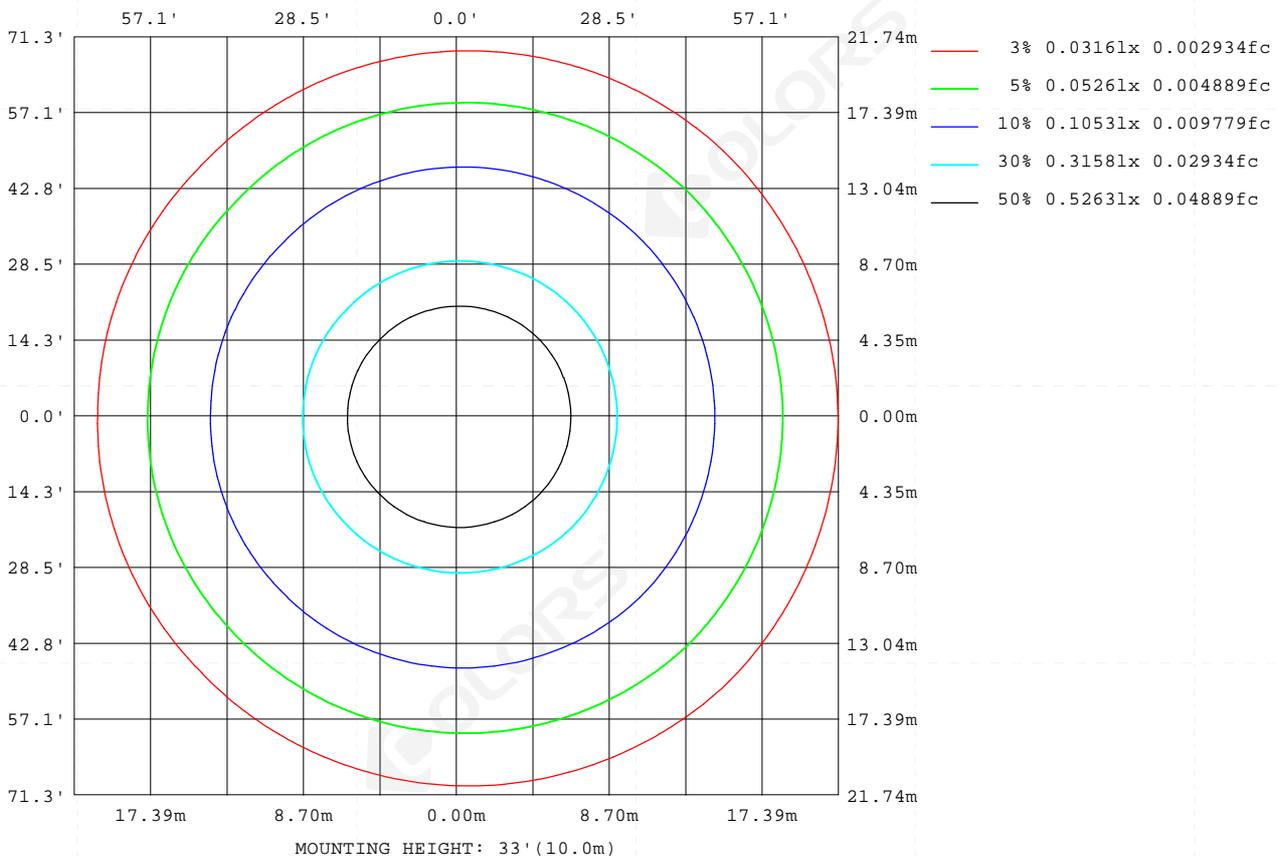

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:24.00V I:0.2700A P:6.650W PF:1.000 Freq:0Hz Lamp Flux:314.096x1 lm		
NAME: LE1410-LS1010	TYPE:	WEIGHT:
SPEC.:LE1410-LS1010	DIM.: 1000*10*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*10mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	9302
L_0~180(75)av	8293
L_0~180(85)av	6955
L_90~270(65)av	9307
L_90~270(75)av	8127
L_90~270(85)av	5912
L_45(65)av	9321
L_45(75)av	8238
L_45(85)av	6475

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

Planar Illuminance Curve

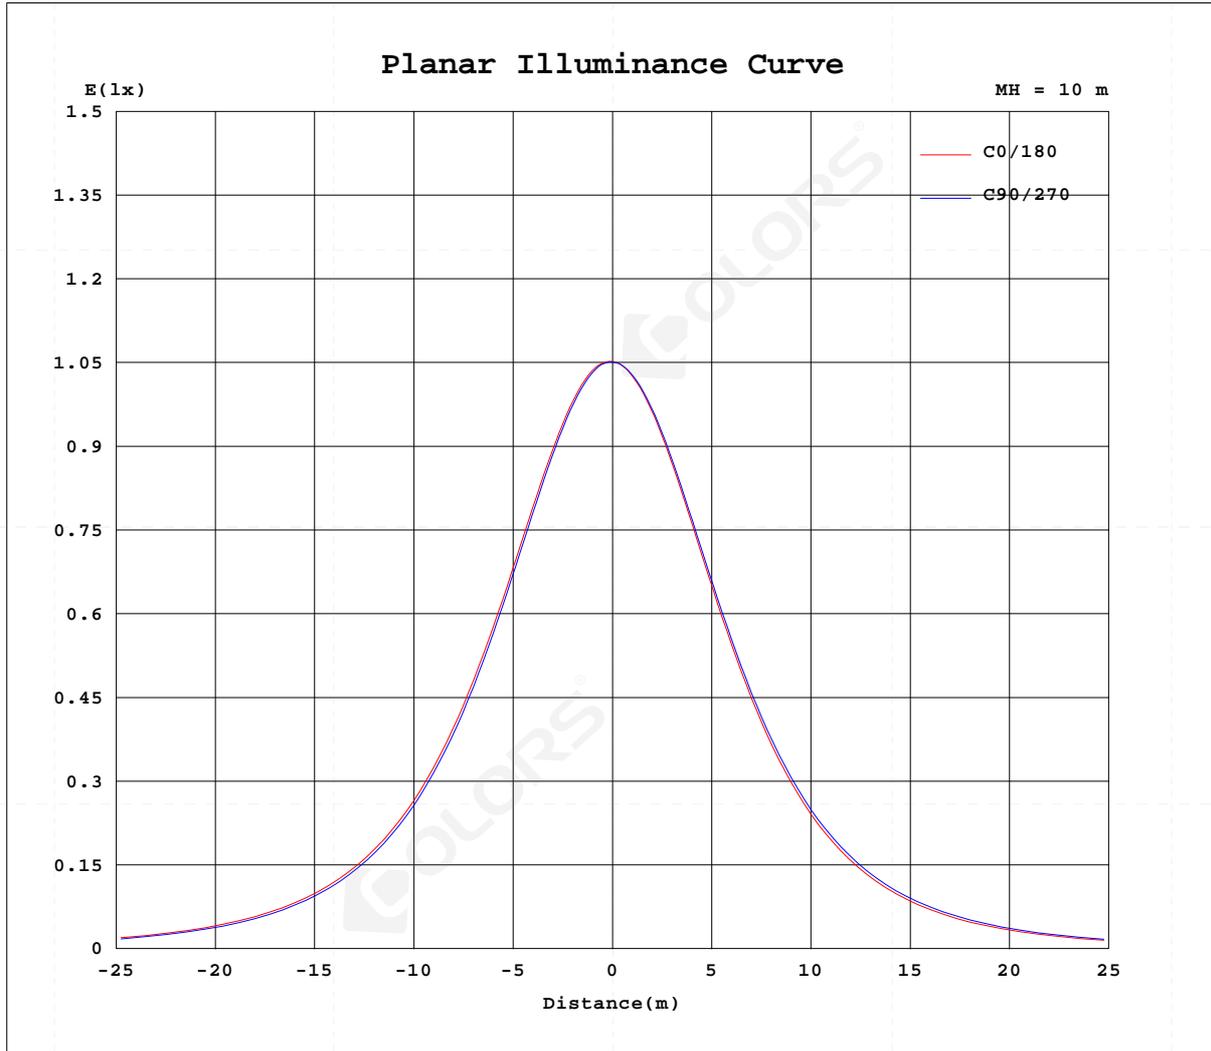

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: JYH
 Test Date: 2022-11-11

Page Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.950m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.2700A P:6.650W PF:1.000 Freq:0Hz Lamp Flux:314.096x1 lm		
NAME: LE1410-LS1010	TYPE:	WEIGHT:
SPEC.:LE1410-LS1010	DIM.: 1000*10*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*10mm	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	45	90	135	180	225	270	315										
0	105	105	105	105	105	105	105	105										
5	105	105	105	105	104	104	105	105										
10	104	105	104	103	103	103	103	104										
15	103	103	102	101	100	99.9	101	102										
20	100	100	98.9	97.6	96.6	96.5	97.6	99.2										
25	96.7	96.9	95.3	93.6	92.5	92.2	93.6	95.7										
30	92.5	92.8	90.7	88.8	87.5	87.3	88.9	91.3										
35	87.5	87.8	85.5	83.2	81.9	81.6	83.5	86.2										
40	81.8	82.1	79.5	77.0	75.4	75.2	77.5	80.4										
45	75.3	75.8	72.9	70.1	68.3	68.2	70.7	73.9										
50	68.2	68.6	65.6	62.5	60.6	60.6	63.3	66.8										
55	60.4	60.9	57.7	54.3	52.5	52.5	55.5	59.0										
60	52.2	52.6	49.2	45.7	43.9	44.0	47.1	50.8										
65	43.6	43.8	40.3	36.7	35.0	35.0	38.4	42.1										
70	34.7	34.7	31.1	27.4	26.0	26.1	29.3	33.1										
75	25.6	25.5	21.7	18.4	17.3	17.3	20.3	24.1										
80	16.9	16.5	12.9	10.1	9.32	9.29	11.8	15.4										
85	8.90	8.44	5.55	3.50	3.22	3.01	4.75	7.62										
90	2.93	2.39	0.46	0.44	0.39	0.24	0.08	1.90										
95	0.43	0.40	0.41	0.39	0.21	0.16	0.13	0.17										
100	0.40	0.40	0.37	0.41	0.31	0.22	0.23	0.19										
105	0.40	0.43	0.39	0.49	0.43	0.35	0.35	0.29										
110	0.47	0.52	0.47	0.60	0.56	0.43	0.49	0.39										
115	0.62	0.65	0.61	0.72	0.67	0.56	0.59	0.50										
120	0.73	0.78	0.73	0.83	0.78	0.65	0.68	0.61										
125	0.86	0.91	0.84	0.93	0.91	0.78	0.77	0.71										
130	1.00	1.00	0.95	1.01	1.02	0.85	0.87	0.83										
135	1.13	1.10	1.06	1.07	1.12	0.95	0.93	0.89										
140	1.24	1.18	1.16	1.14	1.19	1.04	1.00	0.94										
145	1.29	1.24	1.16	1.21	1.24	1.15	1.05	1.02										
150	1.36	1.29	1.26	1.29	1.29	1.25	1.14	1.04										
155	1.48	1.32	1.28	1.36	1.34	1.30	1.26	1.07										
160	1.49	1.37	1.42	1.44	1.38	1.38	1.41	1.18										
165	1.58	1.44	1.54	1.50	1.38	1.48	1.55	1.36										
170	1.59	1.57	1.69	1.56	1.38	1.56	1.67	1.50										
175	1.55	1.70	1.79	1.69	1.40	1.68	1.80	1.68										
180	1.53	1.81	1.82	1.81	1.49	1.81	1.87	1.81										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks: