
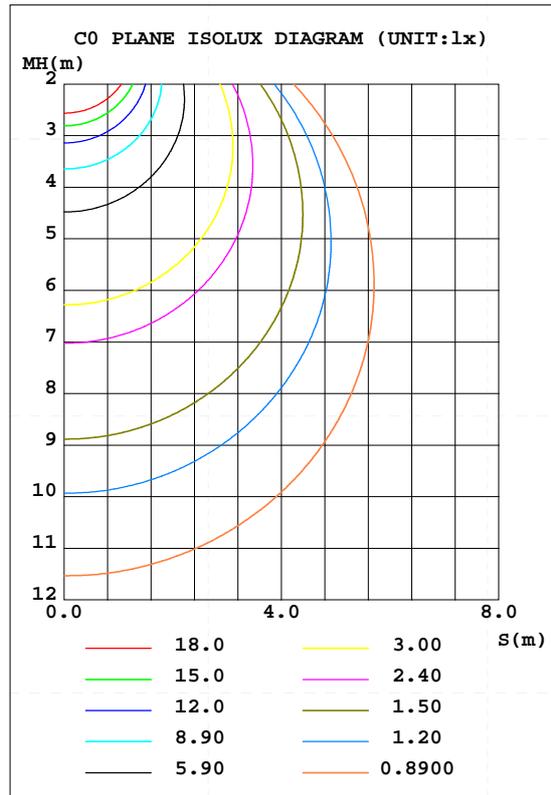


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.2555A P:6.133W PF:1.000 Freq:0Hz Lamp Flux:348.302x1 lm		
NAME: LE1910-LS1510	TYPE:	WEIGHT:
SPEC.:LE1910-LS1510	DIM.: 1000*15*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*15mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	LE1910-LS1510	Imax(cd)	118.6	S/MH(C0/180)	1.28
NOMINAL POWER(W)	7	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	348.30	h UP, DN(C0-180)	0.8,50.3
NOMINAL FLUX(lm)	348.302	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.7,48.1
LAMPS INSIDE	1	h up(%)	1.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	h down(%)	98.4	CIBSE SHR MAX	1.35

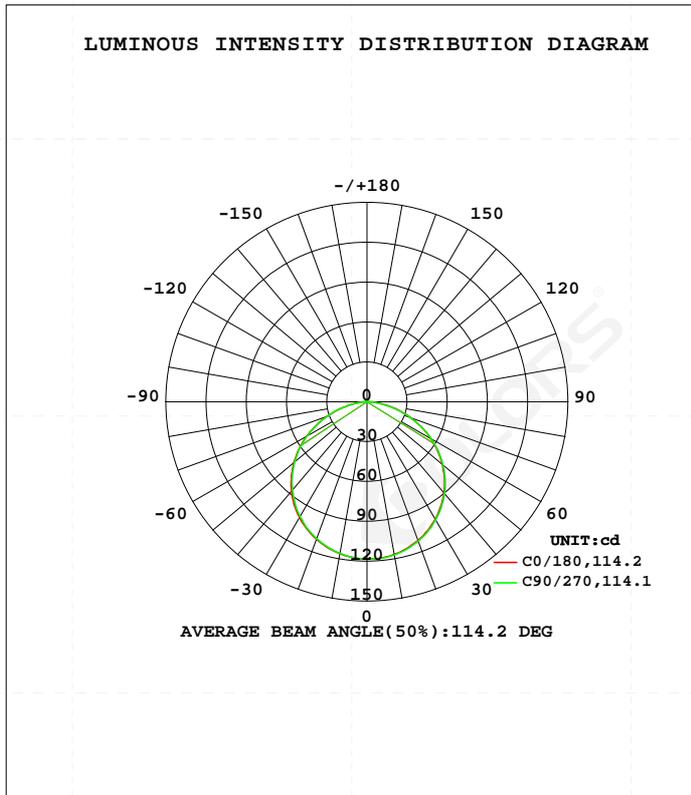

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	116.7	117.2	117.0	116.8	116.1	115.9	116.0	116.4	0- 10	11.22	11.22	3.22,3.22
20	111.1	112.0	111.7	111.2	110.1	109.4	109.6	110.4	10- 20	32.21	43.42	12.5,12.5
30	102.0	103.1	102.7	102.0	100.7	99.50	99.86	100.8	20- 30	49.07	92.49	26.6,26.6
40	89.52	90.69	90.08	89.31	87.72	86.27	86.63	87.77	30- 40	59.63	152.1	43.7,43.7
50	73.42	74.90	74.17	73.08	71.22	69.72	70.47	71.66	40- 50	62.30	214.4	61.6,61.6
60	54.80	55.89	55.30	53.63	52.11	50.33	51.56	52.58	50- 60	56.36	270.8	77.7,77.7
70	34.35	35.19	34.19	32.57	31.39	29.64	31.05	32.09	60- 70	42.52	313.3	90,90
80	14.20	14.93	13.32	12.51	11.68	10.50	11.44	12.68	70- 80	23.60	336.9	96.7,96.7
90	1.592	1.426	0.4897	0.8445	0.7878	0.5508	0.1738	0.8938	80- 90	5.953	342.9	98.4,98.4
100	0.3607	0.3745	0.3607	0.3945	0.2874	0.2665	0.2477	0.2070	90-100	0.4816	343.3	98.6,98.6
110	0.5799	0.5683	0.5139	0.5817	0.5552	0.4997	0.5215	0.4803	100-110	0.4349	343.8	98.7,98.7
120	0.8544	0.8818	0.8282	0.8551	0.8156	0.7136	0.7684	0.7145	110-120	0.6593	344.4	98.9,98.9
130	1.162	1.156	1.081	1.082	1.062	0.9418	0.9622	0.9484	120-130	0.8341	345.3	99.1,99.1
140	1.382	1.356	1.262	1.262	1.290	1.162	1.109	1.075	130-140	0.8907	346.2	99.4,99.4
150	1.590	1.469	1.376	1.430	1.436	1.362	1.276	1.162	140-150	0.8273	347.0	99.6,99.6
160	1.690	1.550	1.576	1.604	1.576	1.570	1.571	1.356	150-160	0.6803	347.7	99.8,99.8
170	1.810	1.764	1.843	1.757	1.590	1.710	1.864	1.683	160-170	0.4681	348.1	100,100
180	1.723	2.024	2.044	2.024	1.690	2.024	2.091	2.024	170-180	0.1740	348.3	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.2555A P:6.133W PF:1.000 Freq:0Hz Lamp Flux:348.302x1 lm		
NAME: LE1910-LS1510	TYPE:	WEIGHT:
SPEC.:LE1910-LS1510	DIM.: 1000*15*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*15mm	Shielding Angle:

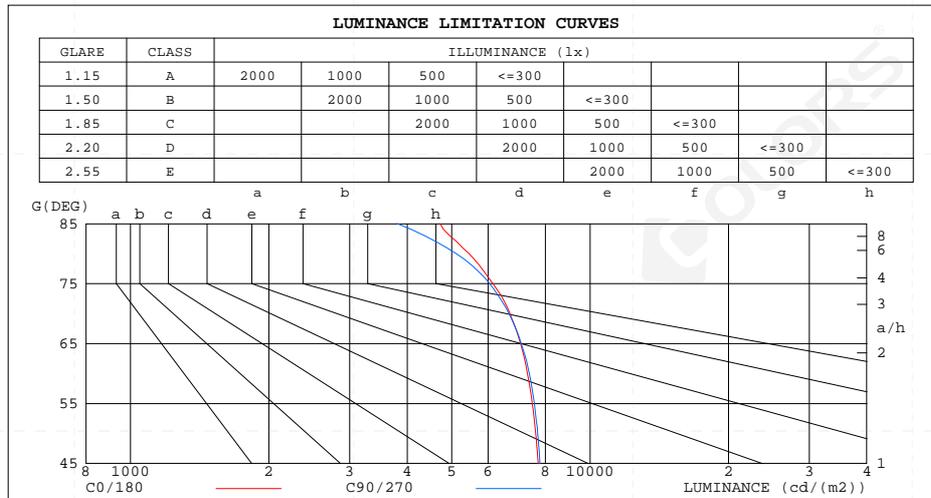

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	4715	3810
80	5452	5112
75	6145	6053
70	6695	6664
65	7060	7088
60	7307	7373
55	7488	7563
50	7615	7693
45	7716	7783


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

G Range: 0 - 180DEG
 G Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.2555A P:6.133W PF:1.000 Freq:0Hz Lamp Flux:348.302x1 lm		
NAME: LE1910-LS1510	TYPE:	WEIGHT:
SPEC.:LE1910-LS1510	DIM.: 1000*15*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*15mm	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.04	.99	.95	1.01	.97	.94	.97	.93	.91	.92	.90	.87	.89	.87	.85	.82
2.0	.90	.83	.78	.88	.82	.77	.84	.79	.75	.81	.76	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.68	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.32	.43	.36	.31	.42	.35	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

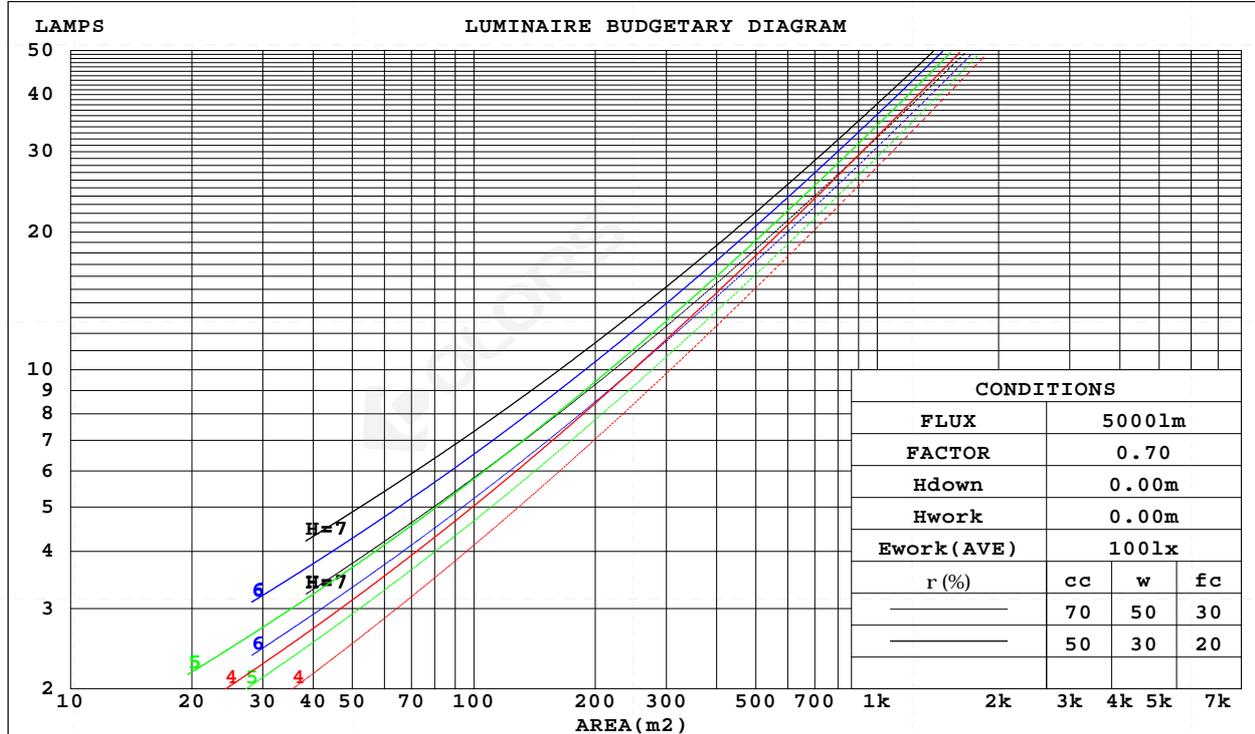

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.2555A P:6.133W PF:1.000 Freq:0Hz Lamp Flux:348.302x1 lm		
NAME: LE1910-LS1510	TYPE:	WEIGHT:
SPEC.:LE1910-LS1510	DIM.: 1000*15*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*15mm	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.308	.175	.055	.300	.171	.054	.286	.164	.052	.273	.157	.051	.261	.151	.049	
2.0	.290	.159	.049	.284	.156	.048	.271	.151	.047	.260	.146	.046	.249	.141	.044	
3.0	.269	.143	.043	.263	.141	.042	.252	.137	.042	.242	.132	.041	.232	.129	.040	
4.0	.249	.129	.038	.243	.127	.038	.233	.124	.037	.224	.120	.036	.216	.117	.036	
5.0	.230	.117	.034	.225	.116	.034	.216	.113	.033	.208	.110	.033	.201	.107	.032	
6.0	.213	.107	.031	.209	.106	.030	.201	.103	.030	.194	.101	.030	.187	.098	.029	
7.0	.199	.098	.028	.195	.097	.028	.188	.095	.027	.181	.093	.027	.175	.091	.027	
8.0	.185	.091	.025	.182	.090	.025	.176	.088	.025	.170	.086	.025	.164	.084	.025	
9.0	.174	.084	.023	.171	.083	.023	.165	.082	.023	.160	.080	.023	.155	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.021	.151	.075	.021	.146	.073	.021	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.202	.202	.202	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.168	.147	.164	.144	.126	.112	.099	.087	.065	.057	.051	.021	.018	.016	
2.0	.184	.144	.110	.158	.124	.095	.108	.086	.066	.062	.050	.039	.020	.016	.013	
3.0	.176	.126	.087	.151	.109	.075	.104	.076	.053	.060	.044	.031	.019	.014	.010	
4.0	.169	.113	.071	.145	.098	.061	.100	.068	.043	.058	.040	.026	.019	.013	.008	
5.0	.162	.103	.059	.139	.089	.052	.096	.062	.037	.055	.036	.022	.018	.012	.007	
6.0	.154	.094	.051	.133	.082	.045	.092	.057	.032	.053	.034	.019	.017	.011	.006	
7.0	.148	.088	.046	.127	.076	.040	.088	.053	.028	.051	.031	.017	.016	.010	.006	
8.0	.141	.082	.041	.122	.071	.036	.084	.050	.025	.049	.029	.015	.016	.010	.005	
9.0	.135	.077	.038	.116	.067	.033	.081	.047	.023	.047	.028	.014	.015	.009	.005	
10.0	.129	.073	.035	.112	.063	.030	.077	.044	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.2555A P:6.133W PF:1.000 Freq:0Hz Lamp Flux:348.302x1 lm										
NAME: LE1910-LS1510					TYPE:			WEIGHT:		
SPEC.:LE1910-LS1510					DIM.: 1000*15*10mm			SERIAL No.:		
MFR.: COLORS					SUR.:1000*15mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.6	25.1	23.9	25.4	25.6	23.7	25.2	24.0	25.4	25.6
3H	25.2	26.5	25.5	26.8	27.1	25.2	26.6	25.5	26.8	27.1
4H	25.8	27.1	26.1	27.4	27.6	25.8	27.1	26.1	27.4	27.6
6H	26.2	27.4	26.5	27.7	28.0	26.1	27.4	26.5	27.7	28.0
8H	26.3	27.5	26.7	27.8	28.1	26.2	27.4	26.6	27.8	28.1
12H	26.4	27.5	26.8	27.9	28.2	26.3	27.4	26.7	27.8	28.1
4H 2H	24.3	25.6	24.6	25.9	26.1	24.3	25.6	24.6	25.9	26.2
3H	26.0	27.1	26.4	27.5	27.8	26.0	27.1	26.4	27.5	27.8
4H	26.7	27.8	27.1	28.1	28.5	26.7	27.7	27.1	28.1	28.5
6H	27.2	28.2	27.7	28.6	29.0	27.2	28.1	27.6	28.5	28.9
8H	27.4	28.3	27.9	28.7	29.1	27.3	28.2	27.8	28.6	29.0
12H	27.5	28.3	28.0	28.7	29.2	27.4	28.2	27.9	28.6	29.1
8H 4H	27.0	27.8	27.4	28.2	28.7	27.0	27.8	27.4	28.2	28.6
6H	27.7	28.4	28.1	28.8	29.3	27.6	28.3	28.1	28.8	29.2
8H	27.9	28.6	28.4	29.0	29.5	27.8	28.5	28.3	28.9	29.4
12H	28.1	28.7	28.6	29.1	29.7	28.0	28.5	28.5	29.0	29.5
12H 4H	27.0	27.8	27.4	28.2	28.6	27.0	27.8	27.4	28.2	28.6
6H	27.7	28.4	28.2	28.8	29.3	27.7	28.3	28.2	28.8	29.3
8H	28.0	28.6	28.5	29.0	29.6	27.9	28.5	28.4	29.0	29.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 348.3 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.7)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.2555A P:6.133W PF:1.000 Freq:0Hz Lamp Flux:348.302x1 lm		
NAME: LE1910-LS1510	TYPE:	WEIGHT:
SPEC.:LE1910-LS1510	DIM.: 1000*15*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*15mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	82	77	69
2.50	98	91	85	96	89	84	92	86	82	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	97	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.2555A P:6.133W PF:1.000 Freq:0Hz Lamp Flux:348.302x1 lm		
NAME: LE1910-LS1510	TYPE:	WEIGHT:
SPEC.:LE1910-LS1510	DIM.: 1000*15*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*15mm	Shielding Angle:

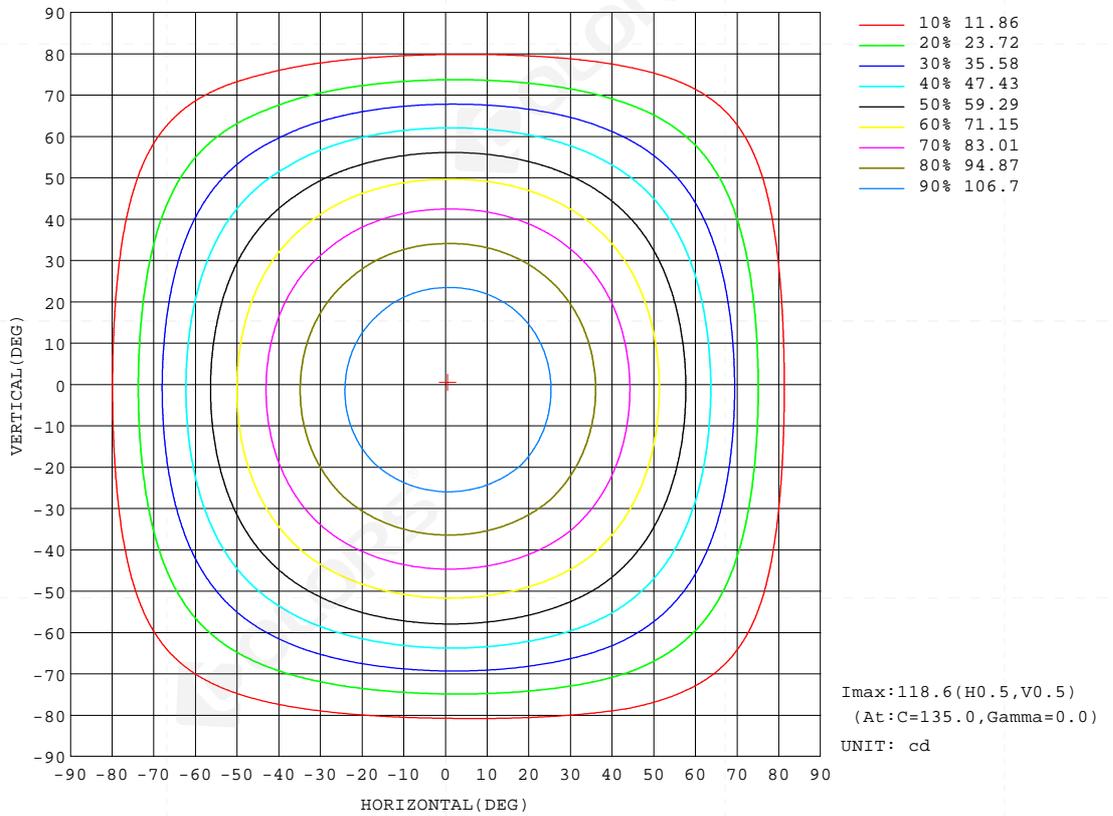


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

AAI Figure

Test:U:24.00V I:0.2555A P:6.133W PF:1.000 Freq:0Hz Lamp Flux:348.302x1 lm		
NAME: LE1910-LS1510	TYPE:	WEIGHT:
SPEC.:LE1910-LS1510	DIM.: 1000*15*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*15mm	Shielding Angle:

Flux out:260.4 lm

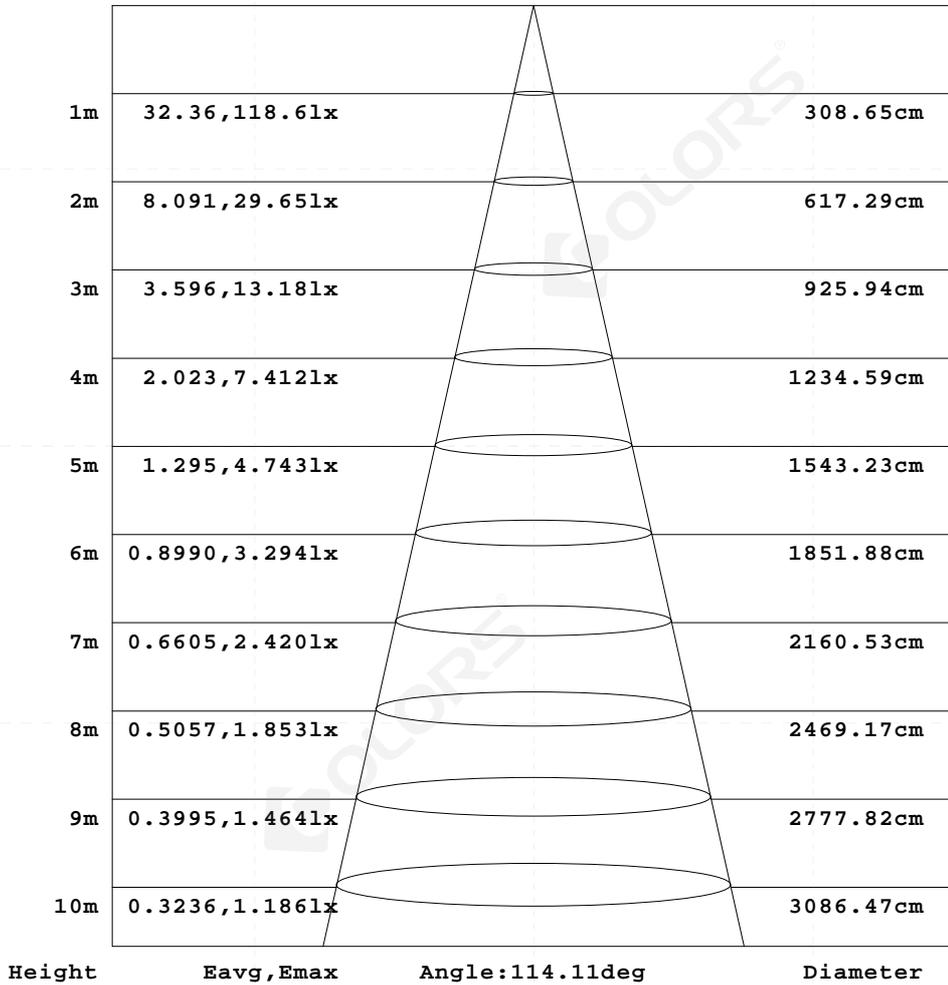


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.2555A P:6.133W PF:1.000 Freq:0Hz Lamp Flux:348.302x1 lm		
NAME: LE1910-LS1510	TYPE:	WEIGHT:
SPEC.:LE1910-LS1510	DIM.: 1000*15*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*15mm	Shielding Angle:

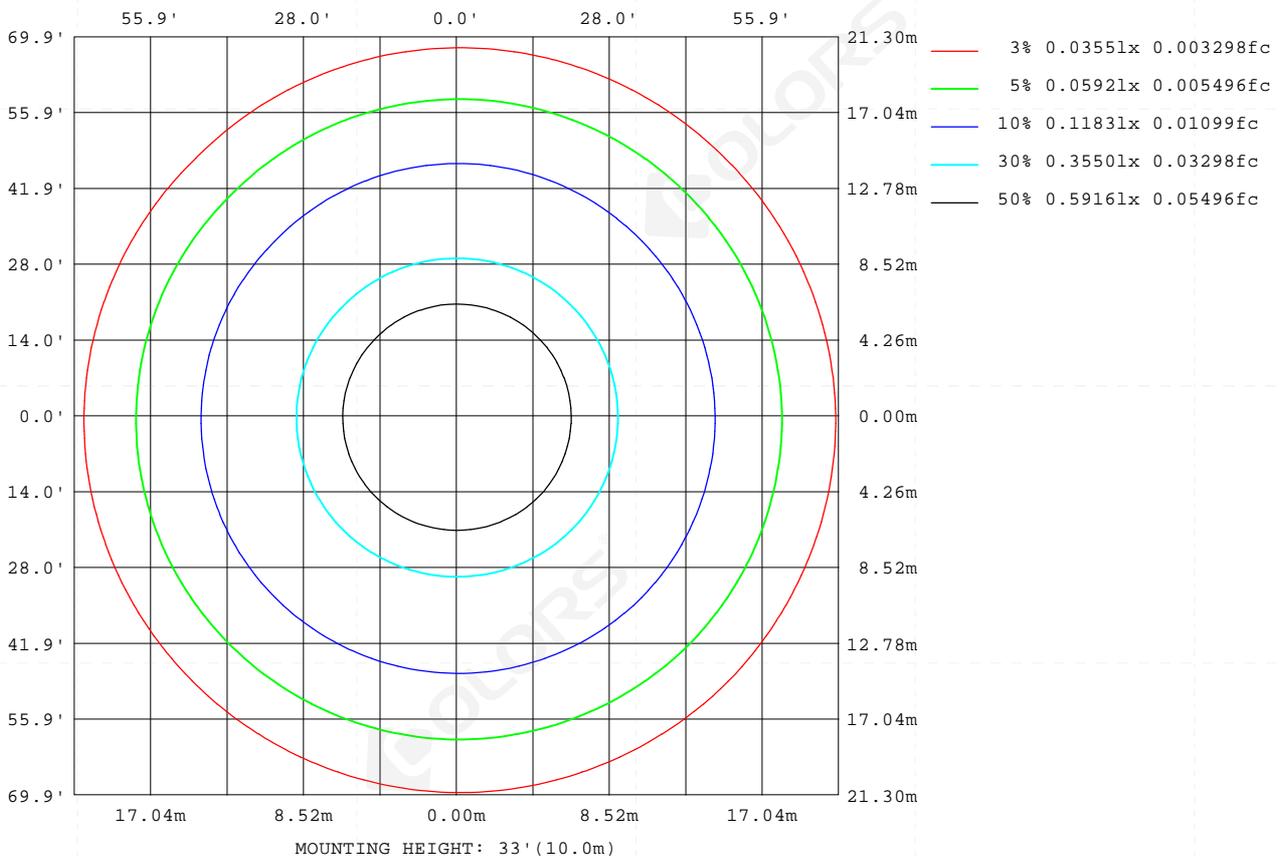

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

Phi Range: 0 - 180DEG
 Phi Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:24.00V I:0.2555A P:6.133W PF:1.000 Freq:0Hz Lamp Flux:348.302x1 lm		
NAME: LE1910-LS1510	TYPE:	WEIGHT:
SPEC.:LE1910-LS1510	DIM.: 1000*15*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*15mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	6827
L_0~180(75)av	5797
L_0~180(85)av	3983
L_90~270(65)av	6802
L_90~270(75)av	5732
L_90~270(85)av	3377
L_45(65)av	6754
L_45(75)av	5706
L_45(85)av	3729

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

Planar Illuminance Curve

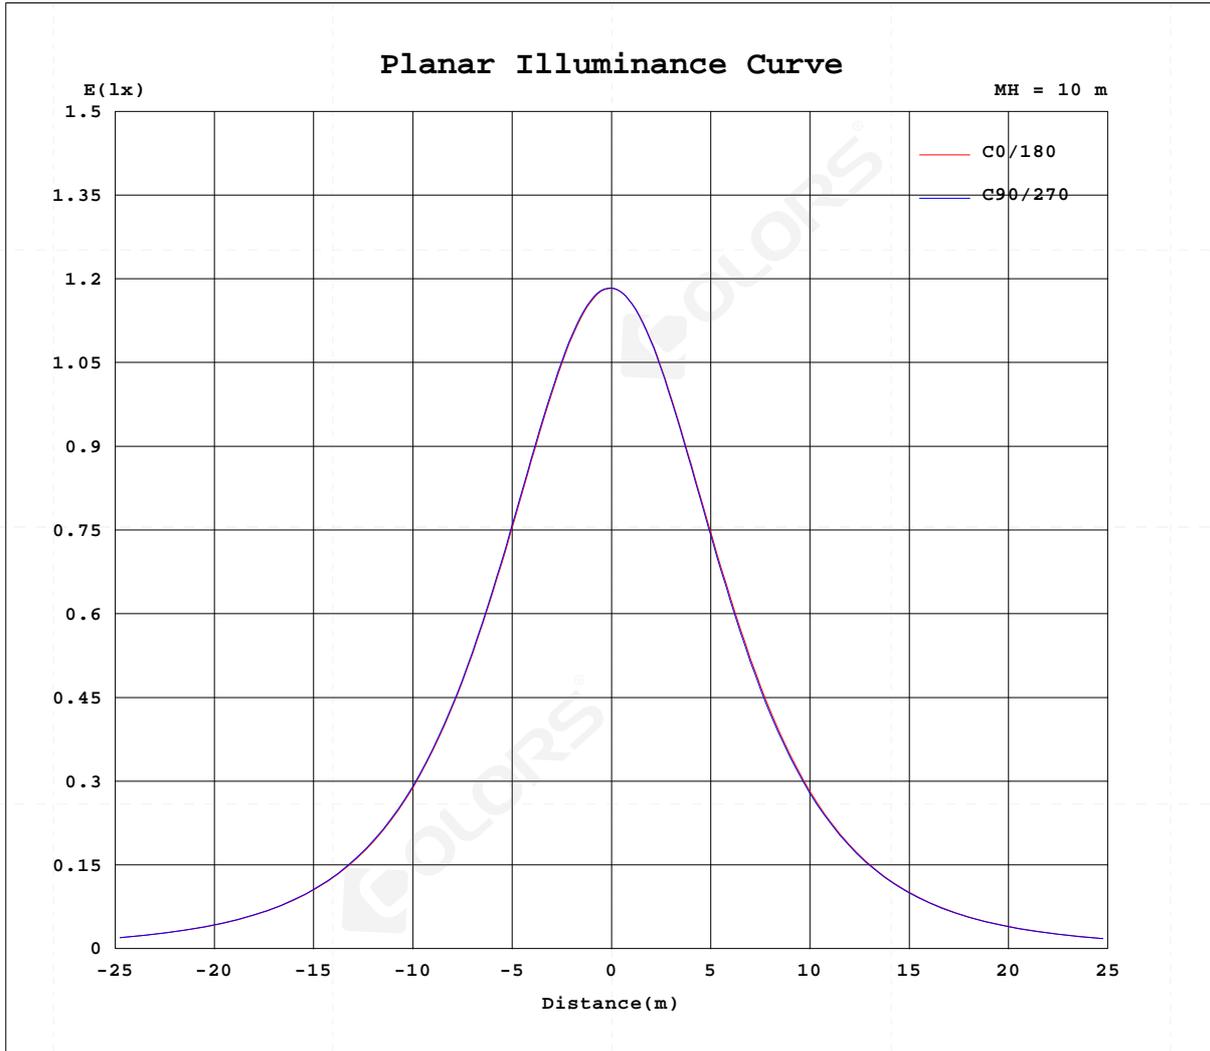

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: JYH
 Test Date: 2022-11-11

Page Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.950m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.2555A P:6.133W PF:1.000 Freq:0Hz Lamp Flux:348.302x1 lm		
NAME: LE1910-LS1510	TYPE:	WEIGHT:
SPEC.:LE1910-LS1510	DIM.: 1000*15*10mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*15mm	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	45	90	135	180	225	270	315										
0	118	119	118	119	118	119	118	119										
5	118	118	118	118	118	118	118	118										
10	117	117	117	117	116	116	116	116										
15	114	115	115	115	114	113	113	114										
20	111	112	112	111	110	109	110	110										
25	107	108	108	107	106	105	105	106										
30	102	103	103	102	101	99.5	99.9	101										
35	96.2	97.3	96.8	96.1	94.7	93.3	93.6	94.7										
40	89.5	90.7	90.1	89.3	87.7	86.3	86.6	87.8										
45	81.8	83.2	82.6	81.6	79.8	78.5	78.9	80.2										
50	73.4	74.9	74.2	73.1	71.2	69.7	70.5	71.7										
55	64.4	65.7	65.1	63.7	61.9	60.3	61.3	62.4										
60	54.8	55.9	55.3	53.6	52.1	50.3	51.6	52.6										
65	44.8	45.7	44.9	43.2	41.8	40.0	41.3	42.4										
70	34.3	35.2	34.2	32.6	31.4	29.6	31.0	32.1										
75	23.9	24.8	23.5	22.1	21.2	19.6	21.0	22.0										
80	14.2	14.9	13.3	12.5	11.7	10.5	11.4	12.7										
85	6.16	6.52	4.98	4.65	4.25	3.38	3.85	4.96										
90	1.59	1.43	0.49	0.84	0.79	0.55	0.17	0.89										
95	0.56	0.39	0.40	0.44	0.41	0.31	0.17	0.21										
100	0.36	0.37	0.36	0.39	0.29	0.27	0.25	0.21										
105	0.41	0.45	0.39	0.47	0.43	0.39	0.39	0.36										
110	0.58	0.57	0.51	0.58	0.56	0.50	0.52	0.48										
115	0.71	0.72	0.69	0.72	0.69	0.60	0.65	0.60										
120	0.85	0.88	0.83	0.86	0.82	0.71	0.77	0.71										
125	1.04	1.02	0.96	0.98	0.94	0.83	0.88	0.83										
130	1.16	1.16	1.08	1.08	1.06	0.94	0.96	0.95										
135	1.27	1.28	1.18	1.18	1.19	1.05	1.04	1.04										
140	1.38	1.36	1.26	1.26	1.29	1.16	1.11	1.08										
145	1.48	1.42	1.35	1.36	1.37	1.26	1.18	1.16										
150	1.59	1.47	1.38	1.43	1.44	1.36	1.28	1.16										
155	1.67	1.51	1.47	1.52	1.51	1.47	1.42	1.25										
160	1.69	1.55	1.58	1.60	1.58	1.57	1.57	1.36										
165	1.81	1.63	1.70	1.67	1.59	1.68	1.72	1.51										
170	1.81	1.76	1.84	1.76	1.59	1.71	1.86	1.68										
175	1.73	1.91	1.97	1.90	1.58	1.85	2.00	1.90										
180	1.72	2.02	2.04	2.02	1.69	2.02	2.09	2.02										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-11-11

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks: