

Specification

LLS-L series

BH3360




BH3360




Features

- lighting upward and downward
- Innovative buckle plug, no light leakage
- Carrier tight fit design carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogeneous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful

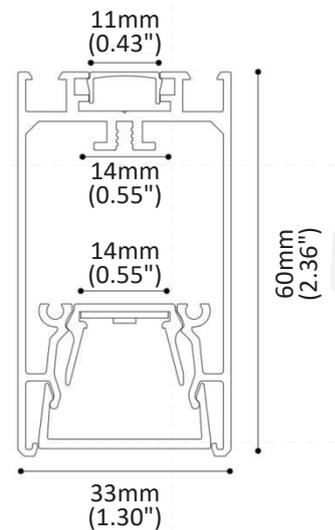

Details

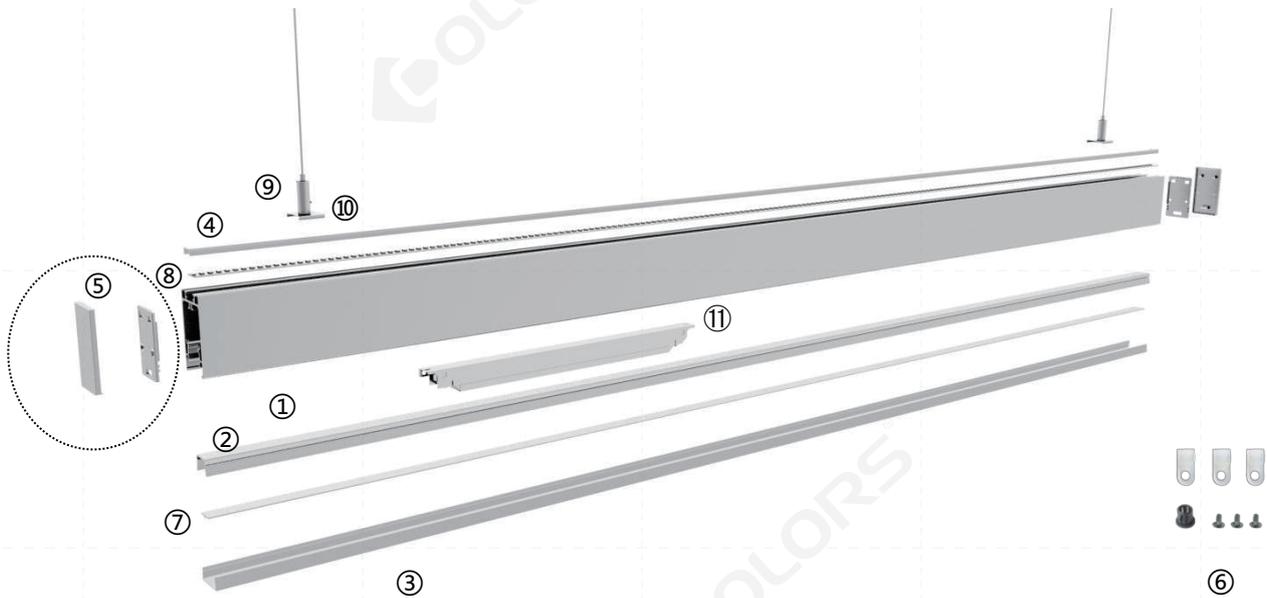

Standard Configuration

Picture	Item	Parameter
	①Profile /②Carrier:	Profile weight: 2.205kg/2.5m Size: L2500*W33*H60mm Material: AL6063-T5 Surface processing: Anodizing
	③Cover	Type: Frosted diffuser Material: PC ; Light transmittance: 80% Size: L2500*W26.6*H10.2mm PC Feature: The diffuser will extend (shrink) 0.8mm/m when the temperature raises (drops) 10°C.
	④Cover(up ward)	Type: Frosted diffuser Material: PC ; Light transmittance: 80% Size: L2500*W11*H5mm PC Feature: The diffuser will extend (shrink) 0.8mm/m when the temperature raises (drops) 10°C.
	⑤End cap	Model: EC-BS3360FSS Size: L33*W60*H5.5mm
	⑥ Cable clip	Model: BG-01



Optional Accessories

Picture	Item	Parameter
	⑦ Flexible strip DL8160-24V-8mm (lighting downward)	Material: FPC,CCT:2700/3000/3500/4000/5000/6000K; CRI > 80/>90; Voltage: 24V; Power: 15W/m; Lumen: 2015Lm/m; Width: 8mm; Minimum cutting unit: 8LEDs/50mm
	⑧ Flexible strip DL880-24V-8mm (lighting upward)	Material: FPC, CCT : 2700/3000/3500/4000/5000/6000K; CRI > 80/>90; Voltage: 24V; Power: 7.5W/m; Lumen: 1190Lm/m; Width: 8mm; Minimum cutting unit: 8LEDs/100mm
	⑨ Pendant cable with junction box	Model: PY-DXXX Junction box L80*W80*H30mm
	⑨ Pendant cable without junction box	Model: PN-DXX Steel cable D1.5*2000/4000mm
	⑩ clip	Model: CP-33
	Pendant rod	Model: PG-IA2 Size: 1-2m
	Reflective paper	Model: BG-22 Size: L15000*W10*H0.075mm
	Integrated track cabling accessories	Dimming: CM-03; CM-06 No dimming: CM-04; CM-05
	⑪ Power supply	Model: BN-V24-060P-V1 Size: L329*W30*H17mm
	Whole lamp splice	Model: EX-38-S Size : L150*W30*H34.5mm
	External splicing part of the whole lamp	Model: EX-41-S Size : L110*W15.5*H11.7mm



Corners

L-type corner (L90- BH3360)



Al6063-T5
L150*W150*H60mm

T-type corner(T90- BH3360)



Al6063-T5
L300*W166.5*H60mm

X-type corner(X90-BH3360)




Al6063-T5
L300*W300*H60mm

* The corners without light source.

Optical Parameter

DL8160-24V-8mm/DL880-24V-8mm light source, frosted diffuser

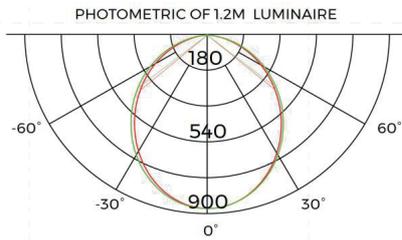


1m	312.8,877.3lx	243.14cm
2m	78.20,219.3lx	486.29cm
3m	34.75,97.48lx	729.43cm
5m	12.51,35.09lx	1215.71cm
7m	6.384,17.90lx	1966.01cm
Height	Eavg,Emax	Angle:101.12deg Diameter




Package

COLORS Individual :

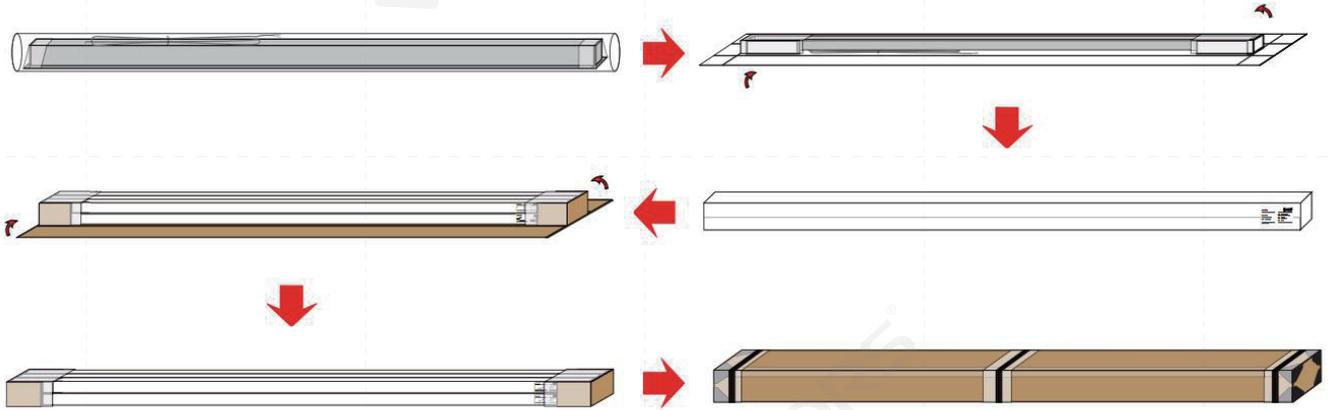

COLORS Whole :

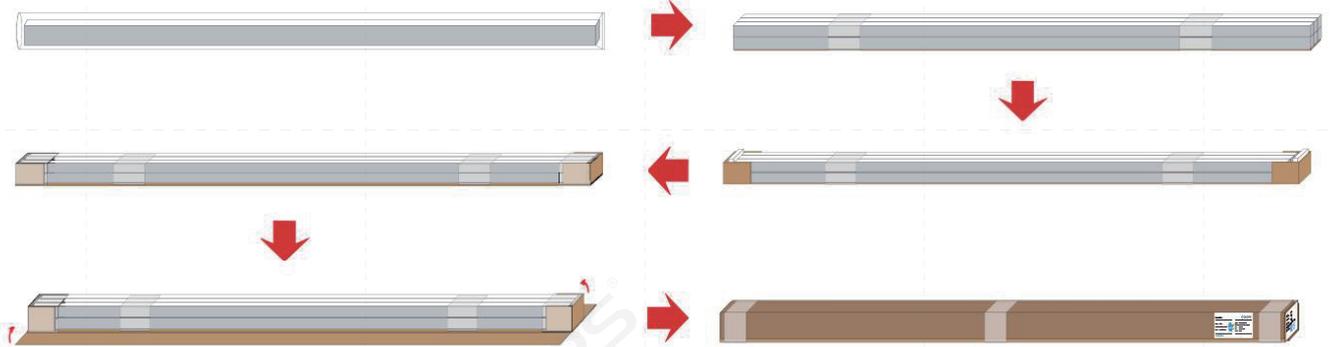

Components	Packaging material	Size(mm)	NW(kg)	GW(kg)	Content
Single piece	Paper box	2560*89*44mm	2.79	3.9	1pcs/box
COLORS Individual	Paper box	2580*207*156mm	16.74	19.74	6pcs/box
COLORS Whole	Paper box	2580*162*147mm	22.32	25.32	6pcs/box

