

Specification

LLS-L series

BH7977



BH7977




Silver



Black




White

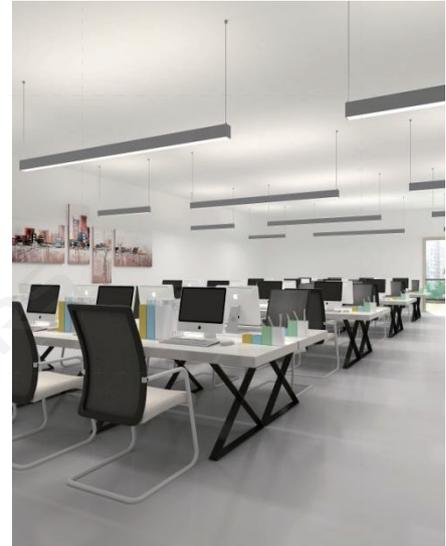


Features

- Innovative buckle plug, no light leakage
- Carrier tight fit design carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogeneous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed, surface

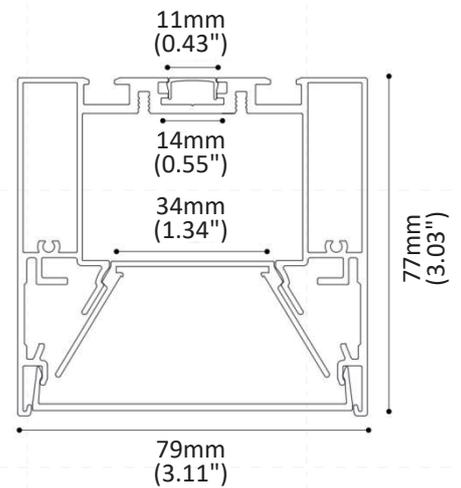

Details

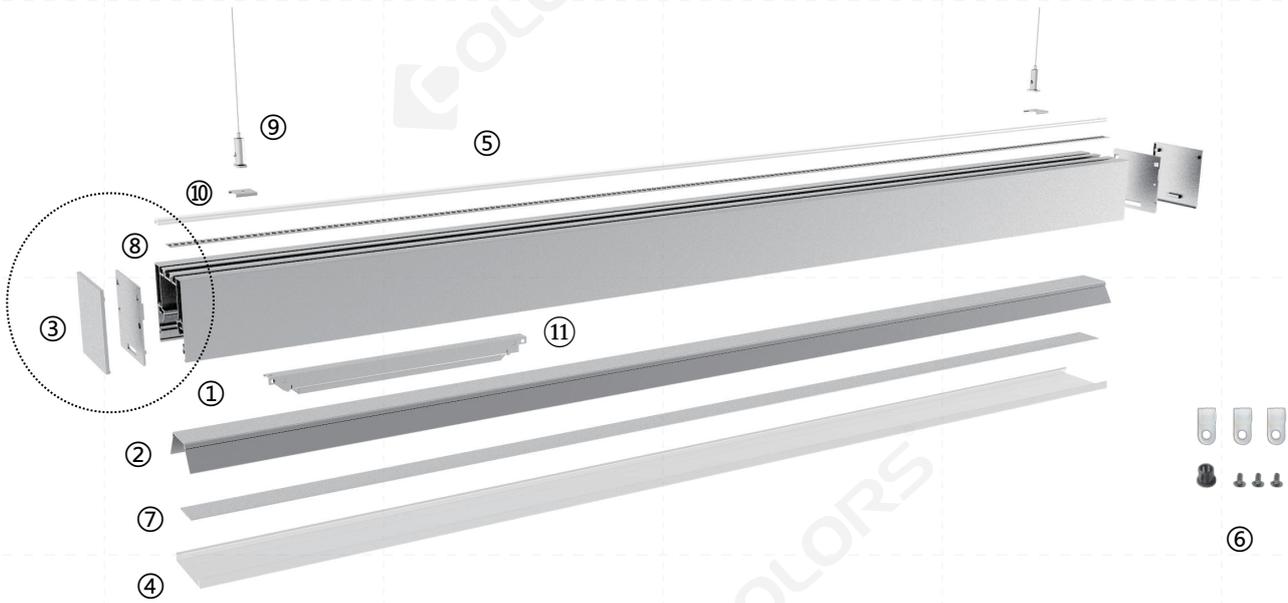

Standard Configuration

Picture	Item	Parameter
	①Profile / ②Carrier:	Profile weight : 4.90kg/2.5m Size : L2500*W79*H77mm Material : AL6063-T5 Surface processing : Anodizing
	④/⑤Cover	Type: Frosted diffuser Material: PC Light transmittance: 80% Size : L2500*W72.3*H10mm / L2500*W11*H5.0mm PC Feature: The diffuser will extend (shrink) 0.8mm/m when the temperature raises (drops) 10°C.
	③End cap	Model : EC-BS7977FSS Size : L79*W77*H5.4mm
	⑥ Cable clip	Model : BG-02



Optional Accessories

Picture	Item	Parameter
	⑦ Flexible strip DL8280-24V-30mm	Material: FPC,CCT:2700/3000/3500/4000/5000/6500K; CRI > 80/>90; Voltage: 24V; Power: 30W/m; Lumen: 4100Lm/m; Width: 30mm; Minimum cutting unit: 14LEDs/50mm;
	⑧ Flexible strip DL8160-24V-8mm	Material: FPC,CCT:2700/3000/3500/4000/5000/6500K; CRI > 80/>90; Voltage: 24V; Power: 15W/m; Lumen: 2015Lm/m; Width: 8mm; Minimum cutting unit: 8LEDs/50mm;
	⑨ Pendant cable with junction box	Model: PY-LXXX Junction box L80*W80*H30mm
	⑨ Pendant cable without junction box	Model: PN-LXX Steel cable D1.5*2000/4000mm
	⑩ clip	Model: CP-16
	Pendant rod	Model: PG-IA2 Size: 1-2m
	Reflective paper	Model: BG-24 Size: L25000*W26.3*H0.2mm
	Integrated track cabling accessories	Dimming: CM-03; CM-06 No dimming: CM-04; CM-05
	⑪ Power supply	Model: BN-V24-060P-V1 Size: L329*W30*H17mm
	Whole lamp splice	Model: EX-40-S Size: L150*W49.2*H32.9mm
	External splicing part of the whole lamp	Model: EX-41-S Size: L110*W15.5*H11.7mm



Corners

L-type corner (L90- BH7977)



Al6063-T5
L150*W150*H77mm

T-type corner(T90- BH7977)



Al6063-T5
L300*W189.5*H77mm

X-type corner(X90- BH7977)




Al6063-T5
L300*W300*H77mm

* The corner without light source.

Optical Parameter

DL8280-24V-30mm/DL8160-24V-8mm light source, frosted diffuser

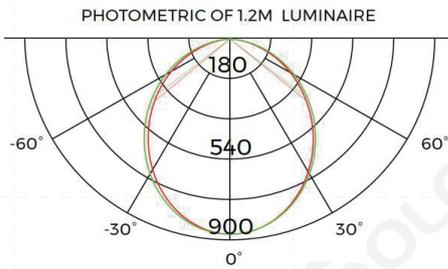


1m	312.8,877.3lx	243.14cm
2m	78.20,219.3lx	486.29cm
3m	34.75,97.48lx	729.43cm
5m	12.51,35.09lx	1215.71cm
7m	6.384,17.90lx	1966.01cm
Height	Eavg,Emax	Angle:101.12deg Diameter




Package

Mode 1 :

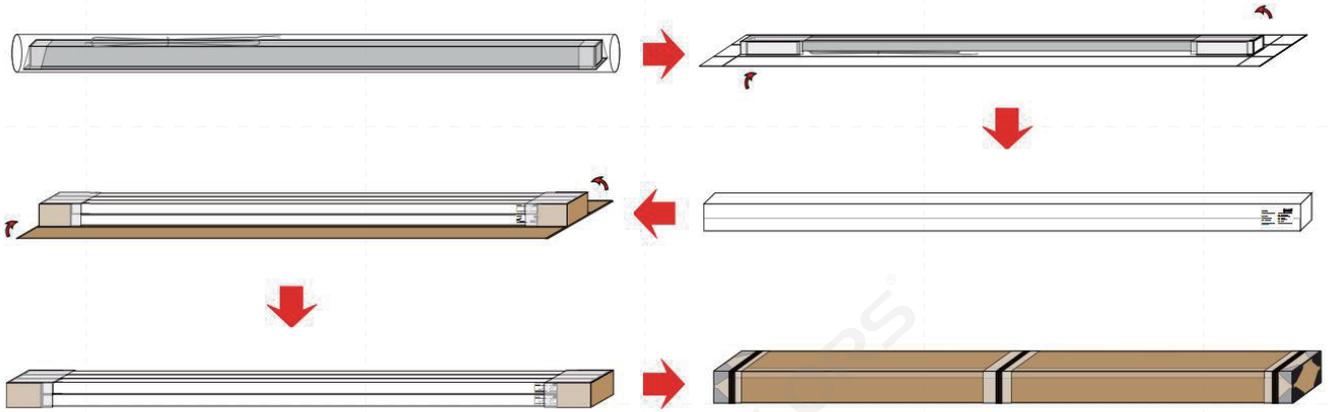

Mode 2 :

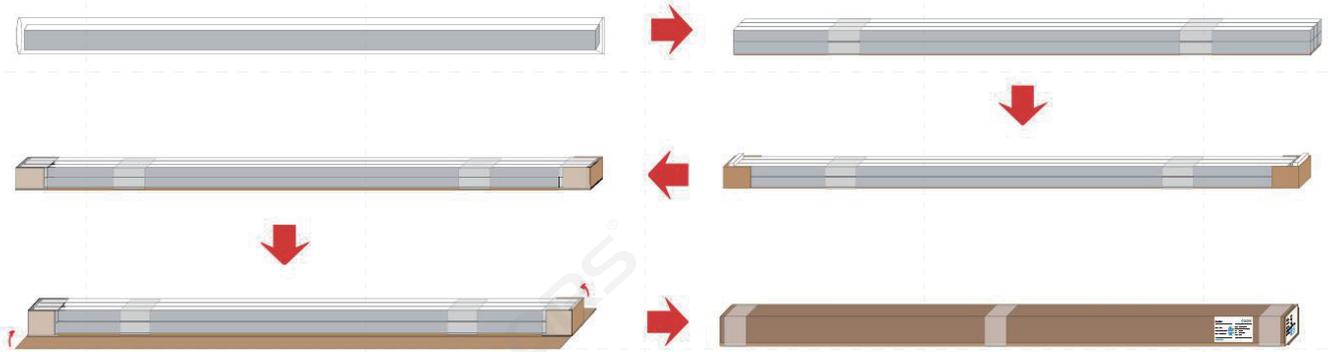

Components	Packaging material	Size(mm)	NW(kg)	GW(kg)	Content
Single piece	Paper box	2560*106*90mm	4.62	5.37	1pcs/box
Whole bundle	Paper box	2580*242*204mm	18.48	21.48	4pcs/box
Whole box packaging	Paper box	2580*188*182mm	18.48	21.48	4pcs/box

