
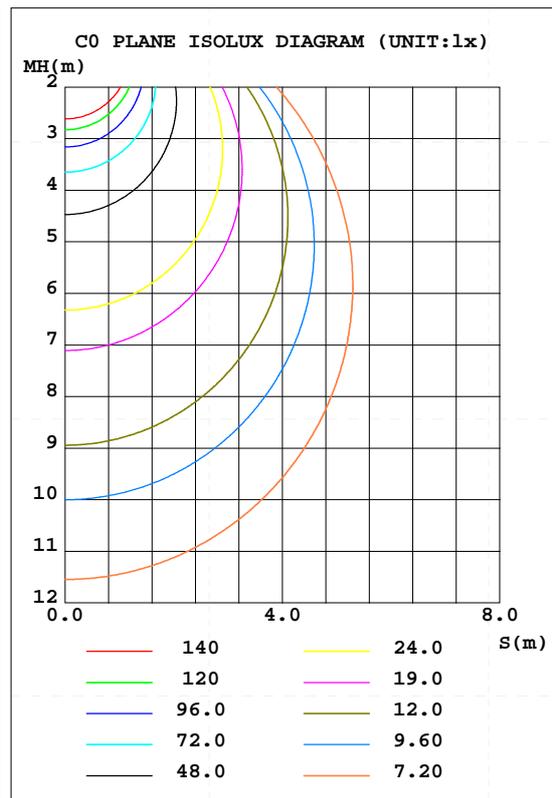


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.9970A P:23.90W PF:1.000 Freq:0Hz Lamp Flux:2442.37x1 lm		
NAME: LLS-LM25FDXBS1200-F20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*25*25	SERIAL No.:
MFR.: COLORS	SUR.:1200*25	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 102.19 lm/W			
MODEL		I <sub>max</sub> (cd)	959.8	S/MH(C0/180)	1.19
NOMINAL POWER(W)	23.9	LOR(%)	100.0	S/MH(C90/270)	1.21
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	2442.4	h UP, DN(C0-180)	0.0,50.0
NOMINAL FLUX(lm)	2442.37	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0,50.0
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	h down(%)	100.0	CIBSE SHR MAX	1.35

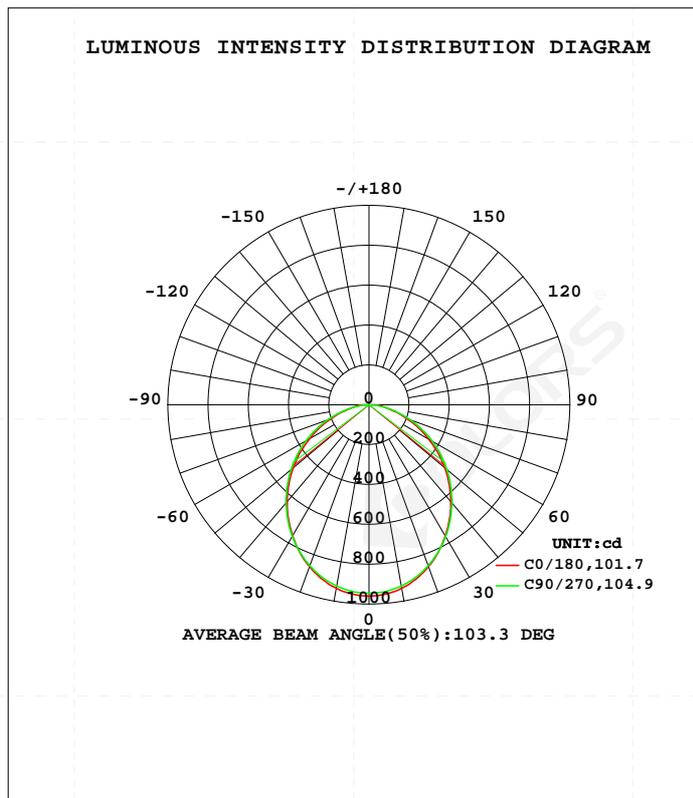

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-09

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	935.1	918.4	923.0	918.4	935.1	918.4	923.0	918.4	0- 10	89.30	89.30	3.66,3.66
20	864.8	851.3	860.0	851.3	864.8	851.3	860.0	851.3	10- 20	252.3	341.5	14,14
30	760.4	751.1	762.9	751.1	760.4	751.1	762.9	751.1	20- 30	373.0	714.5	29.3,29.3
40	633.8	629.8	642.4	629.8	633.8	629.8	642.4	629.8	30- 40	435.9	1150	47.1,47.1
50	492.3	496.5	507.4	496.5	492.3	496.5	507.4	496.5	40- 50	437.6	1588	65,65
60	342.9	353.7	362.5	353.7	342.9	353.7	362.5	353.7	50- 60	381.3	1969	80.6,80.6
70	197.3	206.7	216.4	206.7	197.3	206.7	216.4	206.7	60- 70	276.4	2246	92,92
80	86.71	81.35	81.36	81.35	86.71	81.35	81.36	81.35	70- 80	148.6	2394	98,98
90	0	0	0	0	0	0	0	0	80- 90	47.96	2442	100,100
100	0	0	0	0	0	0	0	0	90-100	0	2442	100,100
110	0	0	0	0	0	0	0	0	100-110	0	2442	100,100
120	0	0	0	0	0	0	0	0	110-120	0	2442	100,100
130	0	0	0	0	0	0	0	0	120-130	0	2442	100,100
140	0	0	0	0	0	0	0	0	130-140	0	2442	100,100
150	0	0	0	0	0	0	0	0	140-150	0	2442	100,100
160	0	0	0	0	0	0	0	0	150-160	0	2442	100,100
170	0	0	0	0	0	0	0	0	160-170	0	2442	100,100
180	0	0	0	0	0	0	0	0	170-180	0	2442	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-09

g Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.9970A P:23.90W PF:1.000 Freq:0Hz Lamp Flux:2442.37x1 lm		
NAME: LLS-LM25FDXBS1200-F20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*25*25	SERIAL No.:
MFR.: COLORS	SUR.:1200*25	Shielding Angle:

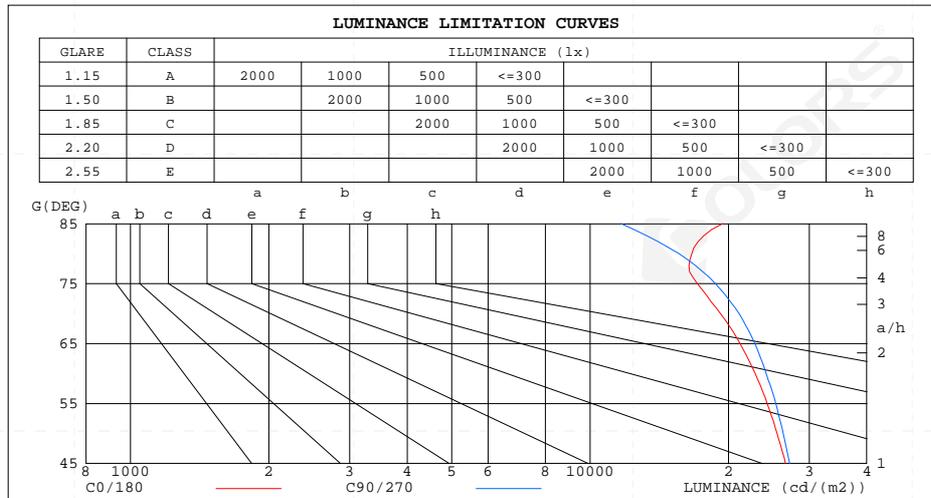

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	19448	11684
80	16645	15617
75	17124	18742
70	19230	21095
65	21198	22826
60	22862	24168
55	24296	25355
50	25532	26312
45	26636	27172


C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-09

G Range: 0 - 180DEG  
 G Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.9970A P:23.90W PF:1.000 Freq:0Hz Lamp Flux:2442.37x1 lm		
NAME: LLS-LM25FDXBS1200-F20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*25*25	SERIAL No.:
MFR.: COLORS	SUR.:1200*25	Shielding Angle:

r <sub>cc</sub>	80%			70%			50%			30%			10%			0
r <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	1.00	.96	1.02	.98	.95	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.85	.79	.89	.83	.78	.86	.81	.76	.83	.78	.74	.80	.76	.73	.71
3.0	.80	.72	.66	.79	.71	.65	.76	.69	.64	.73	.68	.63	.71	.66	.62	.60
4.0	.71	.63	.56	.70	.62	.56	.68	.61	.55	.65	.59	.54	.63	.58	.54	.51
5.0	.64	.55	.49	.63	.55	.48	.61	.53	.48	.59	.52	.47	.57	.51	.47	.45
6.0	.58	.49	.43	.57	.48	.42	.55	.48	.42	.53	.47	.42	.52	.46	.41	.39
7.0	.52	.44	.38	.52	.43	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.39	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.43	.37	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.28	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

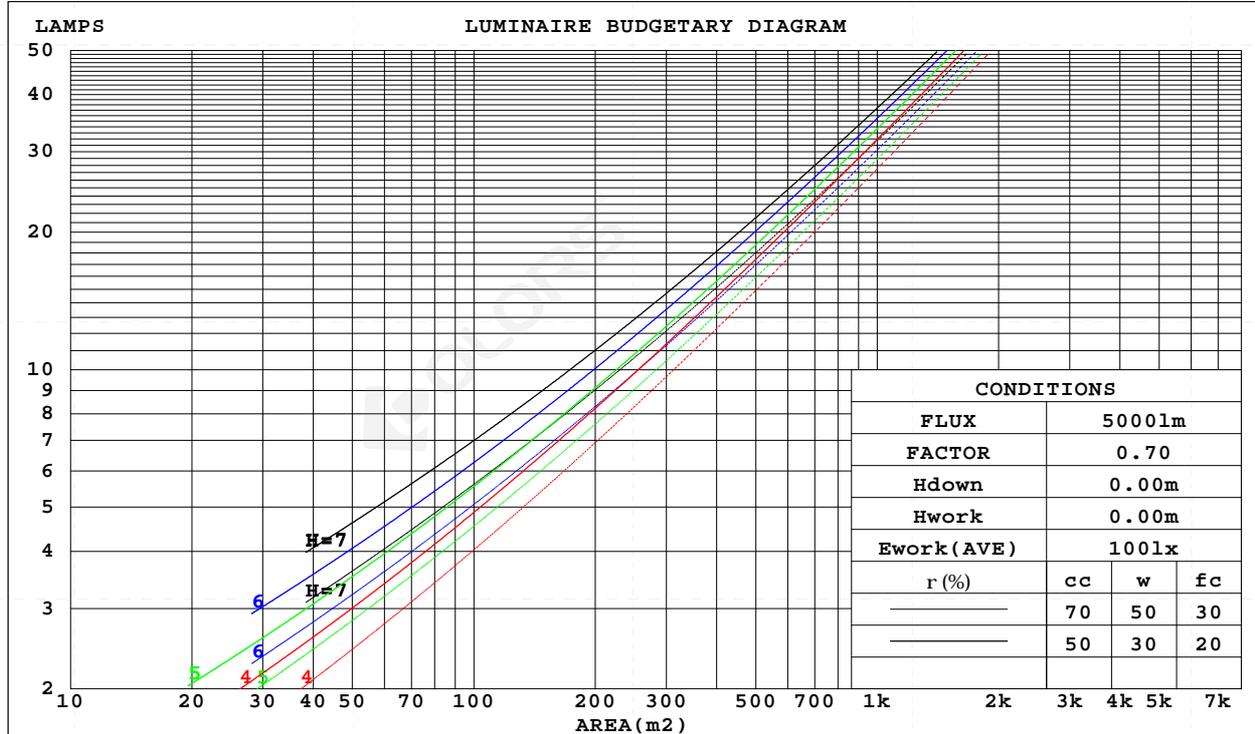

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-09

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.9970A P:23.90W PF:1.000 Freq:0Hz Lamp Flux:2442.37x1 lm		
NAME: LLS-LM25FDXBS1200-F20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*25*25	SERIAL No.:
MFR.: COLORS	SUR.:1200*25	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.302	.172	.054	.295	.168	.053	.281	.161	.052	.269	.155	.050	.258	.150	.048	
2.0	.284	.156	.048	.278	.153	.047	.266	.148	.046	.255	.143	.045	.245	.139	.044	
3.0	.263	.140	.042	.258	.138	.042	.248	.134	.041	.238	.130	.040	.229	.127	.039	
4.0	.244	.127	.037	.239	.125	.037	.230	.122	.036	.221	.119	.036	.213	.116	.035	
5.0	.226	.115	.033	.221	.114	.033	.213	.111	.033	.206	.109	.032	.199	.106	.032	
6.0	.210	.105	.030	.206	.104	.030	.199	.102	.030	.192	.100	.029	.186	.098	.029	
7.0	.195	.097	.027	.192	.096	.027	.186	.094	.027	.180	.092	.027	.174	.090	.027	
8.0	.183	.089	.025	.180	.088	.025	.174	.087	.025	.169	.085	.025	.164	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.164	.081	.023	.159	.080	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
2.0	.171	.132	.099	.147	.114	.086	.100	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.163	.114	.075	.140	.099	.065	.096	.068	.046	.055	.040	.027	.018	.013	.009	
4.0	.155	.101	.059	.133	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.148	.090	.048	.127	.078	.042	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.141	.082	.040	.121	.071	.035	.084	.050	.024	.048	.029	.015	.016	.010	.005	
7.0	.134	.075	.034	.115	.065	.029	.080	.046	.021	.046	.027	.012	.015	.009	.004	
8.0	.128	.069	.029	.110	.060	.025	.076	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.122	.064	.025	.105	.056	.022	.073	.039	.016	.042	.023	.009	.014	.008	.003	
10.0	.116	.060	.023	.100	.052	.020	.069	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-09

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.9970A P:23.90W PF:1.000 Freq:0Hz Lamp Flux:2442.37x1 lm										
NAME: LLS-LM25FDXBS1200-F20NW8X-DC					TYPE:			WEIGHT:		
SPEC.:					DIM.: 1200*25*25			SERIAL No.:		
MFR.: COLORS					SUR.:1200*25			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.7	22.2	21.0	22.4	22.6	20.9	22.4	21.1	22.6	22.8
3H	22.0	23.4	22.3	23.6	23.8	22.3	23.6	22.6	23.9	24.1
4H	22.5	23.8	22.8	24.0	24.3	22.8	24.1	23.1	24.3	24.6
6H	22.8	24.1	23.2	24.3	24.6	23.1	24.3	23.4	24.6	24.9
8H	23.0	24.2	23.3	24.5	24.7	23.2	24.4	23.5	24.7	25.0
12H	23.1	24.3	23.5	24.6	24.9	23.2	24.4	23.6	24.7	25.0
4H 2H	21.3	22.6	21.6	22.8	23.1	21.4	22.7	21.7	23.0	23.2
3H	22.7	23.9	23.1	24.2	24.5	23.0	24.1	23.3	24.4	24.7
4H	23.3	24.4	23.7	24.7	25.0	23.6	24.7	24.0	25.0	25.3
6H	23.8	24.7	24.2	25.1	25.5	24.1	25.0	24.4	25.3	25.7
8H	24.0	24.9	24.4	25.3	25.6	24.2	25.1	24.6	25.4	25.8
12H	24.2	25.0	24.7	25.4	25.8	24.3	25.1	24.7	25.4	25.8
8H 4H	23.6	24.4	24.0	24.8	25.2	23.8	24.7	24.2	25.0	25.4
6H	24.2	24.9	24.6	25.3	25.7	24.4	25.1	24.8	25.5	25.9
8H	24.5	25.1	25.0	25.6	26.0	24.6	25.2	25.1	25.7	26.1
12H	24.8	25.4	25.3	25.8	26.3	24.8	25.3	25.2	25.8	26.2
12H 4H	23.6	24.4	24.0	24.7	25.2	23.8	24.6	24.2	25.0	25.4
6H	24.2	24.9	24.7	25.3	25.8	24.4	25.1	24.9	25.5	25.9
8H	24.6	25.2	25.1	25.6	26.1	24.7	25.2	25.2	25.7	26.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.3 / - 0.3				

CIE Pub.117, 2442 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 3.1)

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-09

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.9970A P:23.90W PF:1.000 Freq:0Hz Lamp Flux:2442.37x1 lm		
NAME: LLS-LM25FDXBS1200-F20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*25*25	SERIAL No.:
MFR.: COLORS	SUR.:1200*25	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	59	48	41	58	47	41	57	47	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	77	66	59	76	66	59	74	67	59	52
1.25	84	74	67	83	73	67	80	72	66	59
1.50	89	80	73	88	79	72	85	77	71	64
2.00	96	88	81	94	86	81	91	84	79	71
2.50	100	92	86	98	91	85	94	88	83	75
3.00	103	96	91	101	95	90	97	92	88	79
4.00	107	101	97	104	99	95	100	96	93	84
5.00	109	104	100	107	102	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-09

g Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:24.00V I:0.9970A P:23.90W PF:1.000 Freq:0Hz Lamp Flux:2442.37x1 lm		
NAME: LLS-LM25FDXBS1200-F20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*25*25	SERIAL No.:
MFR.: COLORS	SUR.:1200*25	Shielding Angle:

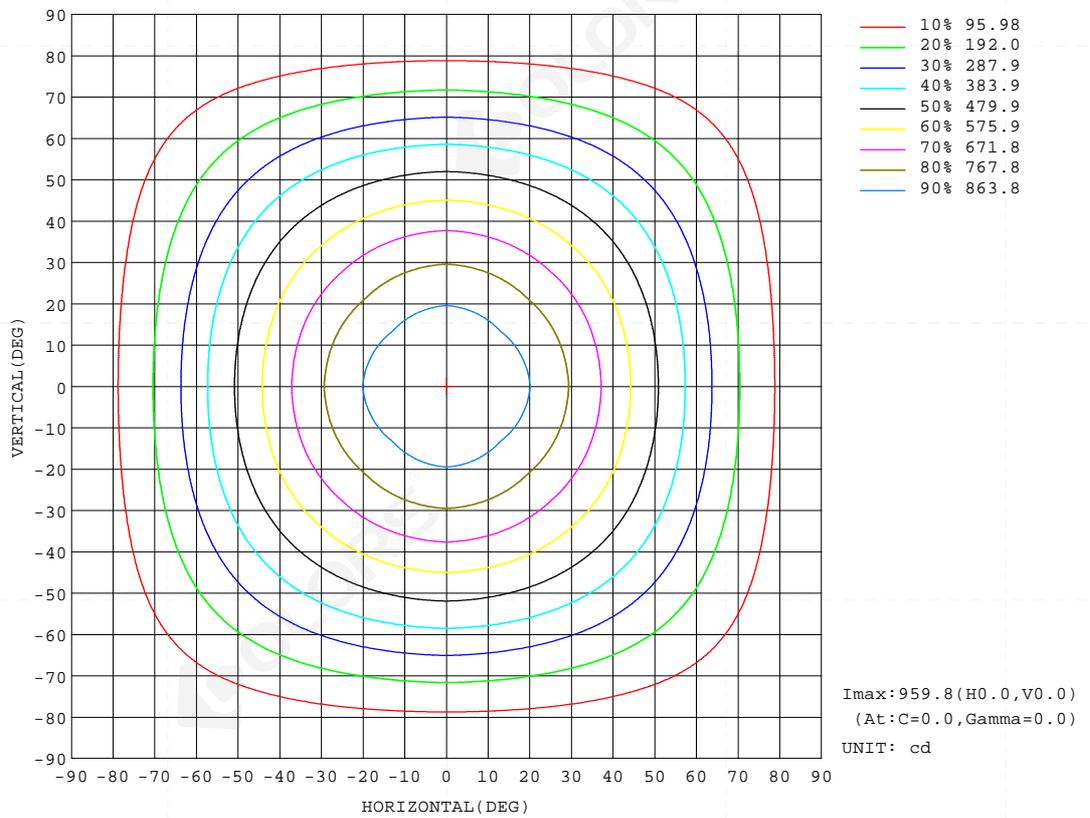


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:JYH  
Test Date:2020-04-09

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

**AAI Figure**

Test:U:24.00V I:0.9970A P:23.90W PF:1.000 Freq:0Hz Lamp Flux:2442.37x1 lm		
NAME: LLS-LM25FDXBS1200-F20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*25*25	SERIAL No.:
MFR.: COLORS	SUR.:1200*25	Shielding Angle:

Flux out:1671 lm

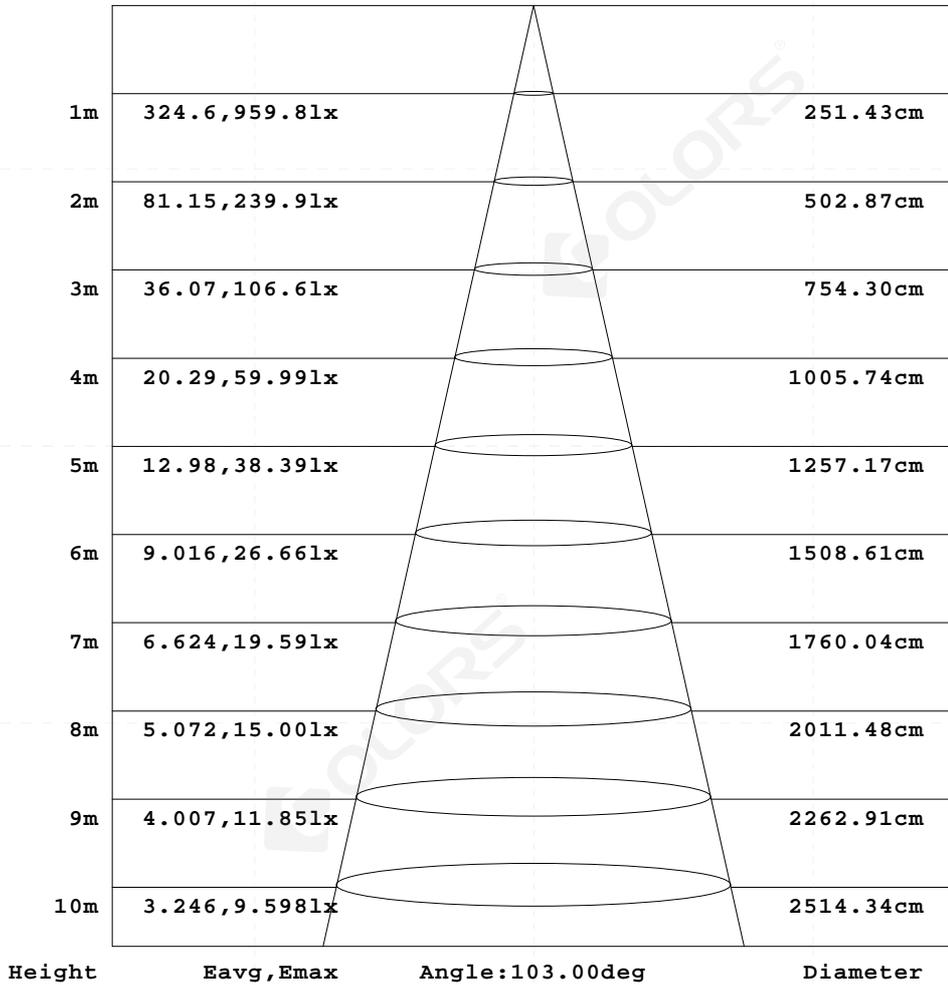


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: JYH  
Test Date: 2020-04-09

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 10.950m [K=1.0000]  
Remarks:

**ISOLUX DIAGRAM**

Test:U:24.00V I:0.9970A P:23.90W PF:1.000 Freq:0Hz Lamp Flux:2442.37x1 lm		
NAME: LLS-LM25FDXBS1200-F20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*25*25	SERIAL No.:
MFR.: COLORS	SUR.:1200*25	Shielding Angle:

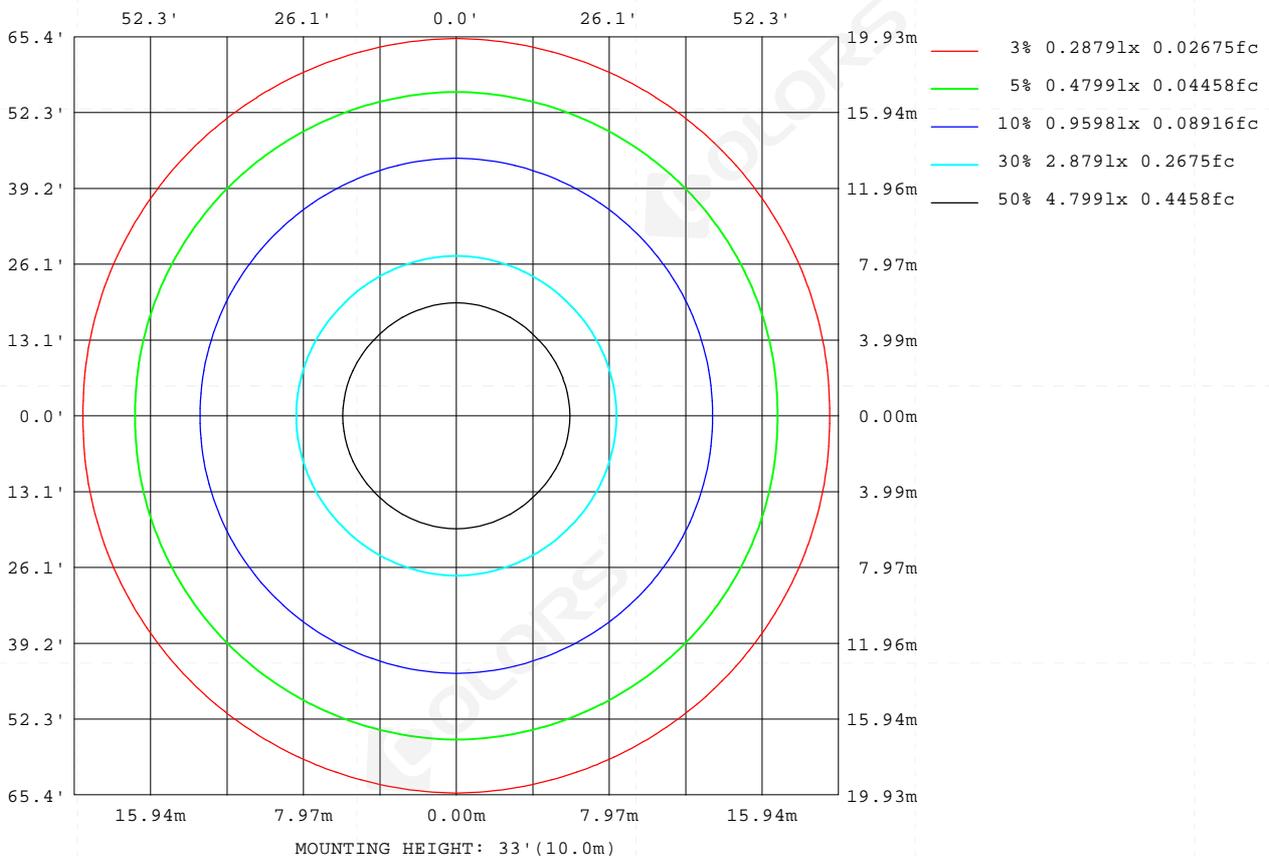

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-09

Page Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

LED Avg.L Report

Test:U:24.00V I:0.9970A P:23.90W PF:1.000 Freq:0Hz Lamp Flux:2442.37x1 lm		
NAME: LLS-LM25FDXBS1200-F20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*25*25	SERIAL No.:
MFR.: COLORS	SUR.:1200*25	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	21198
L_0~180(75)av	17124
L_0~180(85)av	19448
L_90~270(65)av	22826
L_90~270(75)av	18742
L_90~270(85)av	11684
L_45(65)av	22002
L_45(75)av	17889
L_45(85)av	17350

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-09

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

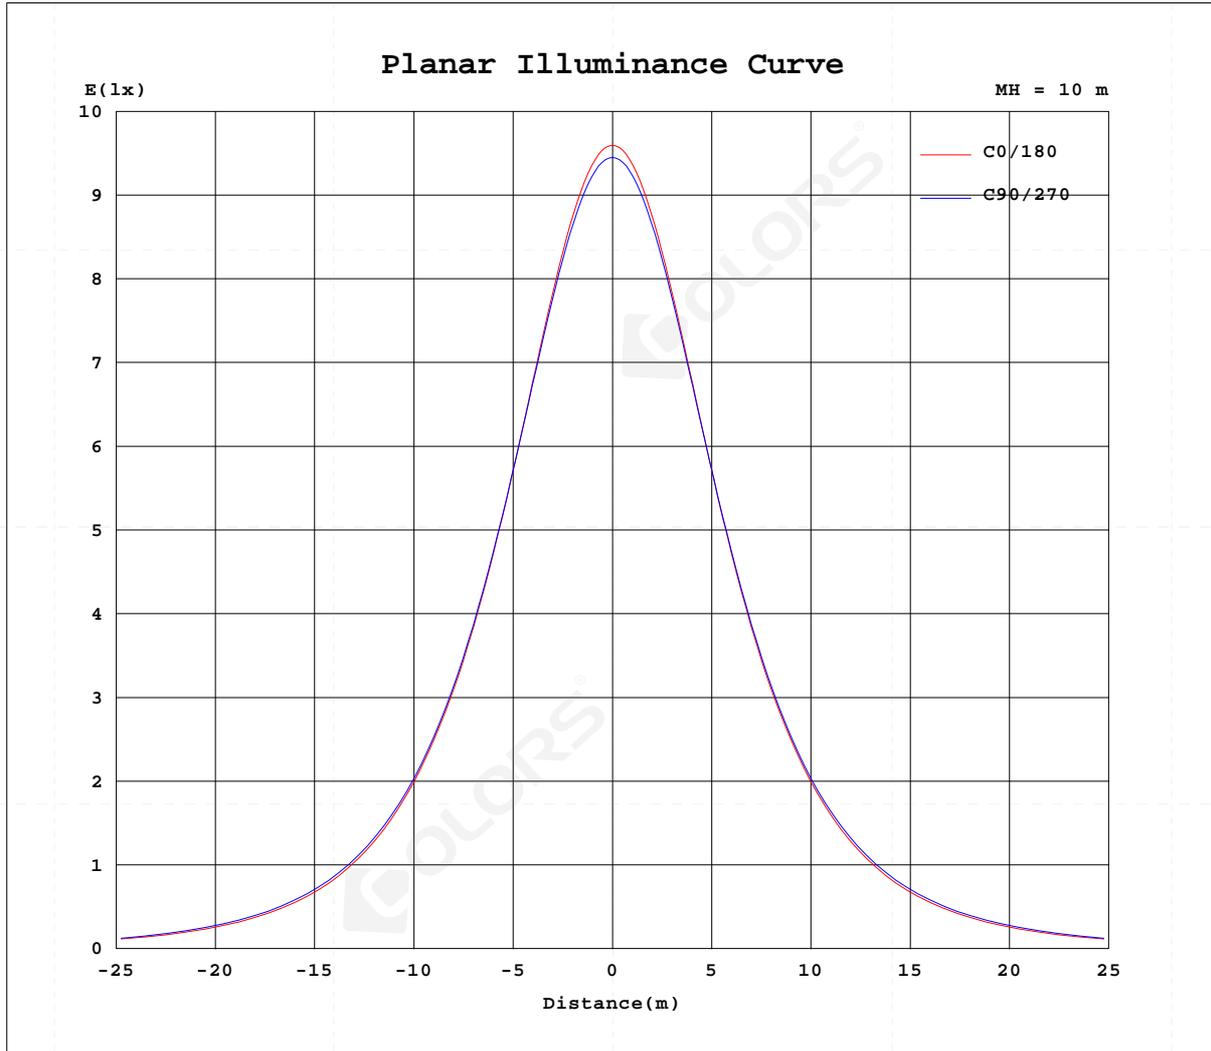

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: JYH  
 Test Date: 2020-04-09

Page Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity: 65.0%  
 Test Distance: 10.950m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.9970A P:23.90W PF:1.000 Freq:0Hz Lamp Flux:2442.37x1 lm		
NAME: LLS-LM25FDXBS1200-F20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*25*25	SERIAL No.:
MFR.: COLORS	SUR.:1200*25	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	45	90	135	180	225	270	315											
0	960	942	945	942	960	942	945	942											
5	953	936	940	936	953	936	940	936											
10	935	918	923	918	935	918	923	918											
15	905	890	896	890	905	890	896	890											
20	865	851	860	851	865	851	860	851											
25	816	805	815	805	816	805	815	805											
30	760	751	763	751	760	751	763	751											
35	699	692	705	692	699	692	705	692											
40	634	630	642	630	634	630	642	630											
45	565	564	576	564	565	564	576	564											
50	492	497	507	497	492	497	507	497											
55	418	426	436	426	418	426	436	426											
60	343	354	363	354	343	354	363	354											
65	269	279	289	279	269	279	289	279											
70	197	207	216	207	197	207	216	207											
75	133	139	146	139	133	139	146	139											
80	86.7	81.3	81.4	81.3	86.7	81.3	81.4	81.3											
85	50.8	45.4	30.5	45.4	50.8	45.4	30.5	45.4											
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-09

g Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks: