
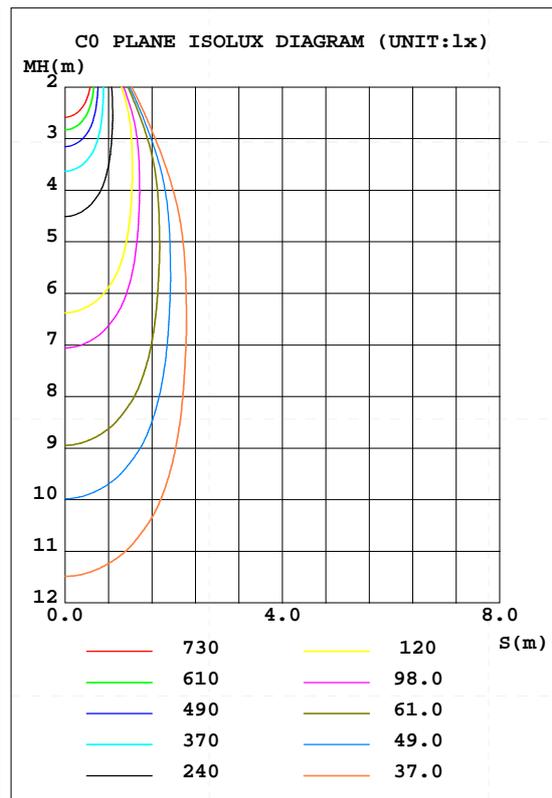


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.8238A P:19.77W PF:1.000 Freq:0Hz Lamp Flux:1693.02x1 lm		
NAME: LLS-LE25GFXB51100(A)-R20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:1100*25mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 85.64 lm/W
MODEL		I <sub>max</sub> (cd)	4881	S/MH(C0/180)		0.53
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)		0.53
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	1693.0	h UP, DN(C0-180)		0.0,50.0
NOMINAL FLUX(lm)	1693.02	CIE CLASS	DIRECT	h UP, DN(C180-360)		0.0,50.0
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM		0.50
TEST VOLTAGE(V)	24	h down(%)	100.0	CIBSE SHR MAX		0.60

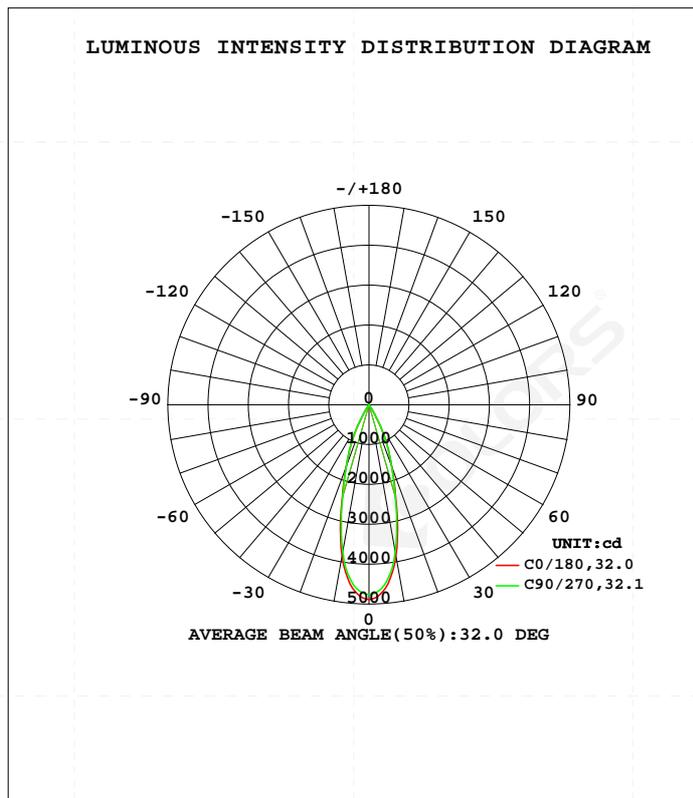

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-05-18

Page Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	3868	3839	3770	3839	3868	3839	3770	3839	0- 10	413.5	413.5	24.4,24.4
20	1674	1698	1673	1698	1674	1698	1673	1698	10- 20	730.8	1144	67.6,67.6
30	383.1	413.0	413.3	413.0	383.1	413.0	413.3	413.0	20- 30	453.7	1598	94.4,94.4
40	24.95	29.30	29.85	29.30	24.95	29.30	29.85	29.30	30- 40	77.93	1676	99,99
50	6.843	8.350	9.425	8.350	6.843	8.350	9.425	8.350	40- 50	12.37	1688	99.7,99.7
60	0.6354	0.8552	1.698	0.8552	0.6354	0.8552	1.698	0.8552	50- 60	3.554	1692	99.9,99.9
70	0.1698	0.3123	1.046	0.3123	0.1698	0.3123	1.046	0.3123	60- 70	0.6124	1692	100,100
80	0.0268	0.1351	0.6489	0.1351	0.0268	0.1351	0.6489	0.1351	70- 80	0.3672	1693	100,100
90	0	0	0	0	0	0	0	0	80- 90	0.1648	1693	100,100
100	0	0	0	0	0	0	0	0	90-100	0	1693	100,100
110	0	0	0	0	0	0	0	0	100-110	0	1693	100,100
120	0	0	0	0	0	0	0	0	110-120	0	1693	100,100
130	0	0	0	0	0	0	0	0	120-130	0	1693	100,100
140	0	0	0	0	0	0	0	0	130-140	0	1693	100,100
150	0	0	0	0	0	0	0	0	140-150	0	1693	100,100
160	0	0	0	0	0	0	0	0	150-160	0	1693	100,100
170	0	0	0	0	0	0	0	0	160-170	0	1693	100,100
180	0	0	0	0	0	0	0	0	170-180	0	1693	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-05-18

g Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.8238A P:19.77W PF:1.000 Freq:0Hz Lamp Flux:1693.02x1 lm		
NAME: LLS-LE25GFXBS1100(A)-R20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:1100*25mm	Shielding Angle:

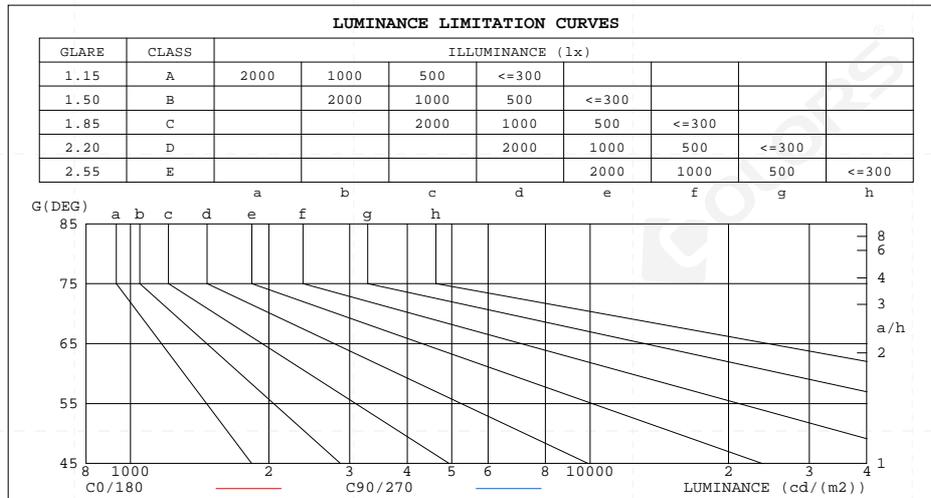

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	7	191
80	6	136
75	12	123
70	18	111
65	24	109
60	46	123
55	210	290
50	387	533
45	682	858


C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-05-18

G Range: 0 - 180DEG  
 G Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:24.00V I:0.8238A P:19.77W PF:1.000 Freq:0Hz Lamp Flux:1693.02x1 lm		
NAME: LLS-LE25GFXBS1100(A)-R20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:1100*25mm	Shielding Angle:

r <sub>cc</sub>	80%			70%			50%			30%			10%			0
r <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.01	1.00	.99	.98	.98	.96
2.0	1.07	1.03	1.01	1.05	1.02	.99	1.02	.99	.97	.99	.97	.95	.96	.95	.93	.92
3.0	1.01	.97	.94	1.00	.96	.94	.98	.95	.92	.95	.93	.91	.93	.91	.89	.88
4.0	.97	.92	.89	.96	.92	.89	.94	.90	.88	.92	.89	.87	.90	.88	.86	.84
5.0	.93	.88	.85	.92	.87	.84	.90	.86	.84	.89	.85	.83	.87	.84	.82	.81
6.0	.89	.84	.81	.88	.84	.81	.87	.83	.80	.85	.82	.80	.84	.81	.79	.78
7.0	.85	.81	.77	.85	.80	.77	.83	.80	.77	.82	.79	.76	.81	.78	.76	.75
8.0	.82	.77	.74	.81	.77	.74	.81	.77	.74	.80	.76	.74	.79	.76	.73	.72
9.0	.79	.74	.71	.79	.74	.71	.78	.74	.71	.77	.73	.71	.76	.73	.71	.70
10.0	.76	.72	.69	.76	.72	.69	.75	.71	.69	.74	.71	.68	.74	.71	.68	.67

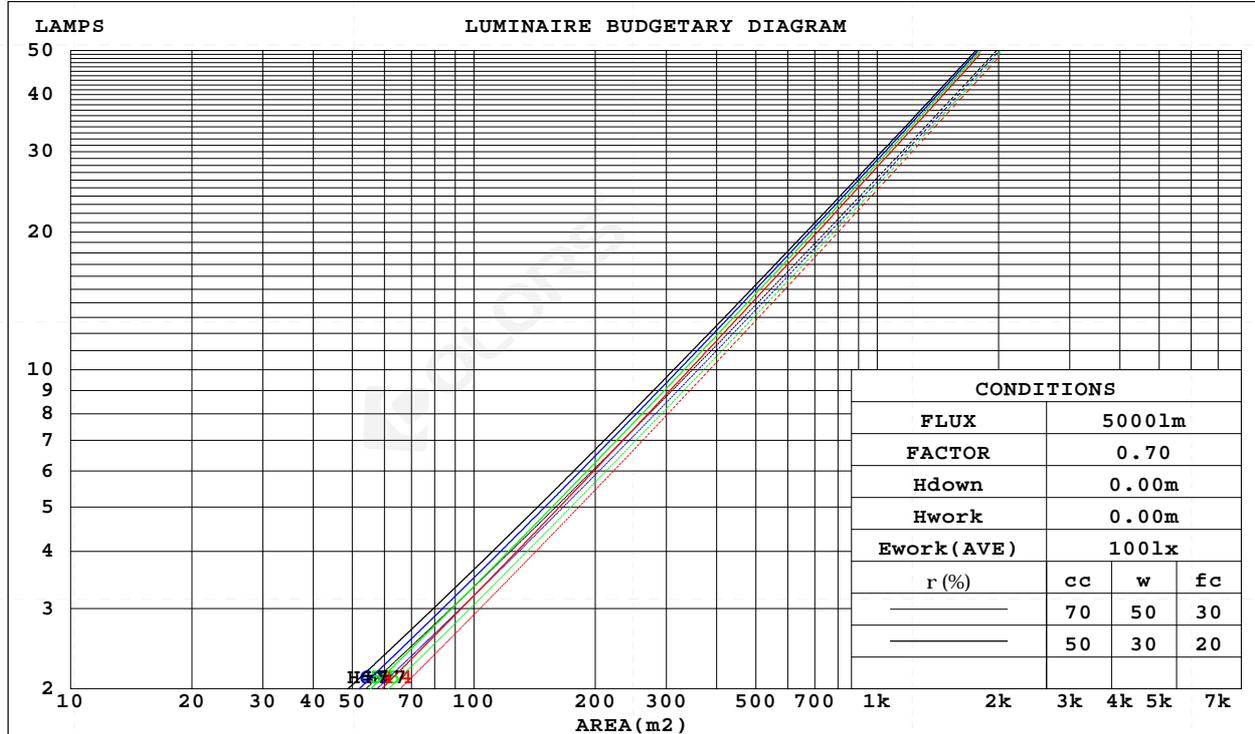

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-05-18

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.8238A P:19.77W PF:1.000 Freq:0Hz Lamp Flux:1693.02x1 lm		
NAME: LLS-LE25GFXBS1100(A)-R20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:1100*25mm	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.147	.083	.026	.140	.080	.025	.128	.073	.023	.116	.067	.022	.106	.061	.020	
2.0	.137	.075	.023	.132	.073	.022	.121	.068	.021	.112	.063	.020	.103	.058	.018	
3.0	.129	.069	.021	.124	.067	.020	.116	.063	.019	.108	.059	.018	.100	.056	.017	
4.0	.122	.063	.019	.118	.062	.018	.110	.059	.017	.104	.056	.017	.097	.053	.016	
5.0	.115	.059	.017	.112	.057	.017	.106	.055	.016	.100	.053	.016	.094	.050	.015	
6.0	.110	.055	.016	.107	.054	.016	.101	.052	.015	.096	.050	.015	.091	.048	.014	
7.0	.105	.052	.015	.102	.051	.015	.097	.049	.014	.093	.048	.014	.089	.046	.014	
8.0	.100	.049	.014	.098	.048	.014	.094	.047	.013	.090	.045	.013	.086	.044	.013	
9.0	.096	.046	.013	.094	.046	.013	.090	.045	.013	.087	.044	.012	.084	.042	.012	
10.0	.092	.044	.012	.091	.044	.012	.087	.043	.012	.084	.042	.012	.081	.041	.012	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.147	.145	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.016	
2.0	.152	.133	.117	.130	.114	.101	.089	.079	.070	.051	.046	.041	.016	.015	.013	
3.0	.137	.113	.094	.118	.098	.082	.081	.068	.057	.047	.040	.034	.015	.013	.011	
4.0	.125	.098	.077	.108	.085	.067	.074	.059	.047	.043	.035	.028	.014	.011	.009	
5.0	.115	.086	.064	.099	.074	.056	.068	.052	.039	.040	.031	.023	.013	.010	.008	
6.0	.107	.076	.054	.092	.066	.047	.063	.046	.033	.037	.027	.020	.012	.009	.007	
7.0	.100	.068	.046	.086	.059	.040	.059	.041	.028	.034	.024	.017	.011	.008	.006	
8.0	.094	.062	.040	.081	.053	.035	.056	.038	.024	.032	.022	.015	.011	.007	.005	
9.0	.088	.056	.034	.076	.049	.030	.053	.034	.021	.031	.020	.013	.010	.007	.004	
10.0	.084	.052	.030	.072	.045	.026	.050	.031	.019	.029	.019	.011	.009	.006	.004	

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-05-18

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.8238A P:19.77W PF:1.000 Freq:0Hz Lamp Flux:1693.02x1 lm										
NAME: LLS-LE25GFXBS1100(A)-R20NW8X-DC					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: COLORS					SUR.:1100*25mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	1.5	2.2	1.7	2.3	2.5	2.1	2.9	2.4	3.0	3.2
3H	1.3	2.0	1.6	2.2	2.4	2.0	2.7	2.3	2.9	3.1
4H	1.2	1.9	1.5	2.1	2.3	1.9	2.6	2.2	2.8	3.0
6H	1.1	1.7	1.4	2.0	2.2	1.9	2.5	2.2	2.7	2.9
8H	1.1	1.7	1.4	1.9	2.2	1.8	2.4	2.1	2.7	2.9
12H	1.1	1.6	1.4	1.9	2.1	1.8	2.4	2.1	2.6	2.9
4H 2H	1.2	1.9	1.5	2.1	2.3	1.9	2.6	2.2	2.8	3.0
3H	1.1	1.6	1.4	1.9	2.1	1.8	2.3	2.1	2.6	2.8
4H	1.0	1.5	1.3	1.8	2.1	1.7	2.2	2.0	2.5	2.8
6H	0.9	1.3	1.2	1.6	2.0	1.6	2.1	2.0	2.4	2.7
8H	0.8	1.2	1.2	1.6	1.9	1.6	2.0	2.0	2.3	2.7
12H	0.8	1.1	1.2	1.5	1.9	1.6	1.9	2.0	2.3	2.7
8H 4H	0.8	1.2	1.2	1.6	1.9	1.5	2.0	1.9	2.3	2.7
6H	0.7	1.1	1.1	1.4	1.9	1.5	1.8	1.9	2.2	2.6
8H	0.6	1.0	1.1	1.4	1.8	1.4	1.7	1.9	2.1	2.6
12H	0.6	0.8	1.1	1.3	1.8	1.4	1.7	1.9	2.1	2.6
12H 4H	0.8	1.1	1.2	1.5	1.9	1.5	1.9	1.9	2.2	2.6
6H	0.6	1.0	1.1	1.4	1.8	1.4	1.7	1.8	2.1	2.6
8H	0.6	0.9	1.1	1.3	1.8	1.4	1.6	1.8	2.1	2.5
Variations with the observer position at spacings:										
S = 1.0H	+ 3.2 / -10.2					+ 3.4 / - 6.4				
1.5H	+ 4.7 / - 6.5					+ 5.0 / - 5.5				
2.0H	+ 5.3 / -11.0					+ 4.9 / - 5.3				

CIE Pub.117, 1693 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.8)

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-05-18

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.8238A P:19.77W PF:1.000 Freq:0Hz Lamp Flux:1693.02x1 lm		
NAME: LLS-LE25GFXBS1100(A)-R20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:1100*25mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	91	85	82	90	85	82	90	85	82	78
0.80	98	93	89	97	92	89	96	92	89	86
1.00	102	97	93	101	96	93	99	96	93	89
1.25	105	101	98	104	100	97	102	99	96	92
1.50	108	103	100	106	103	100	104	101	99	95
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	112	110	109	109	107	106	99
5.00	116	114	112	114	112	110	110	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-05-18

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:24.00V I:0.8238A P:19.77W PF:1.000 Freq:0Hz Lamp Flux:1693.02x1 lm		
NAME: LLS-LE25GFXBS1100(A)-R20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:1100*25mm	Shielding Angle:

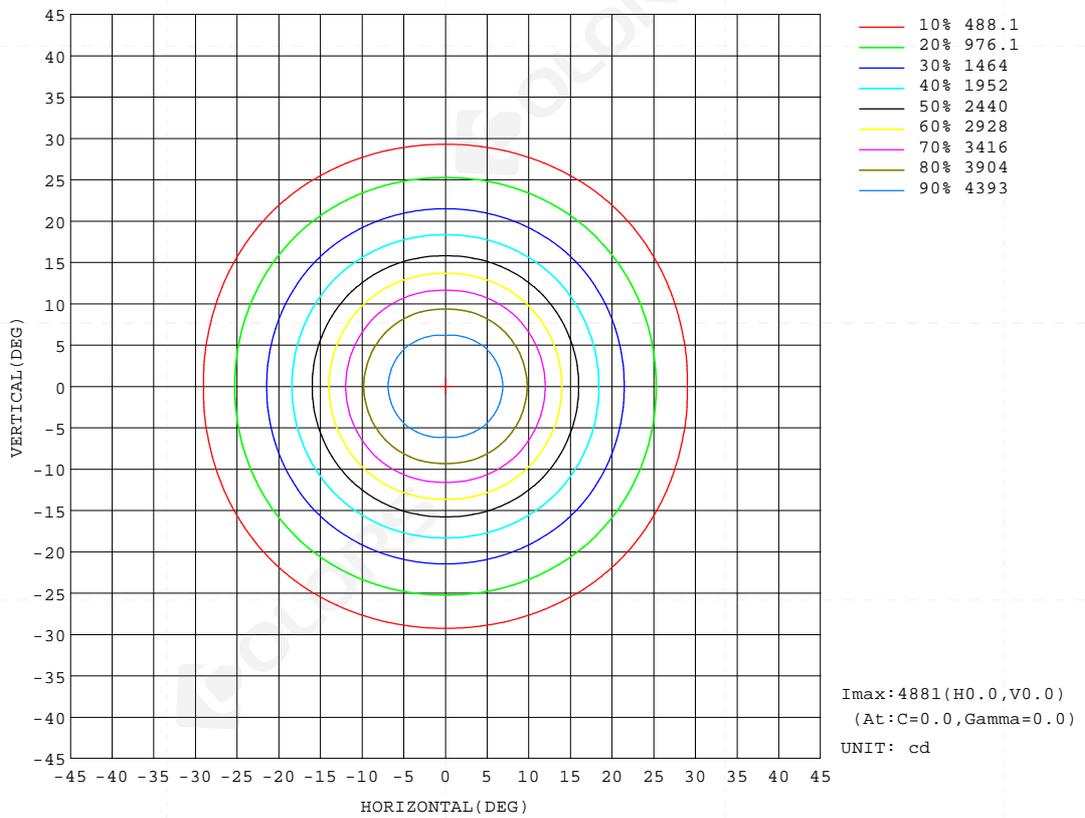


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:JYH  
Test Date:2021-05-18

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

**AAI Figure**

Test:U:24.00V I:0.8238A P:19.77W PF:1.000 Freq:0Hz Lamp Flux:1693.02x1 lm		
NAME: LLS-LE25GFXBS1100(A)-R20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:1100*25mm	Shielding Angle:

Flux out:869.7 lm

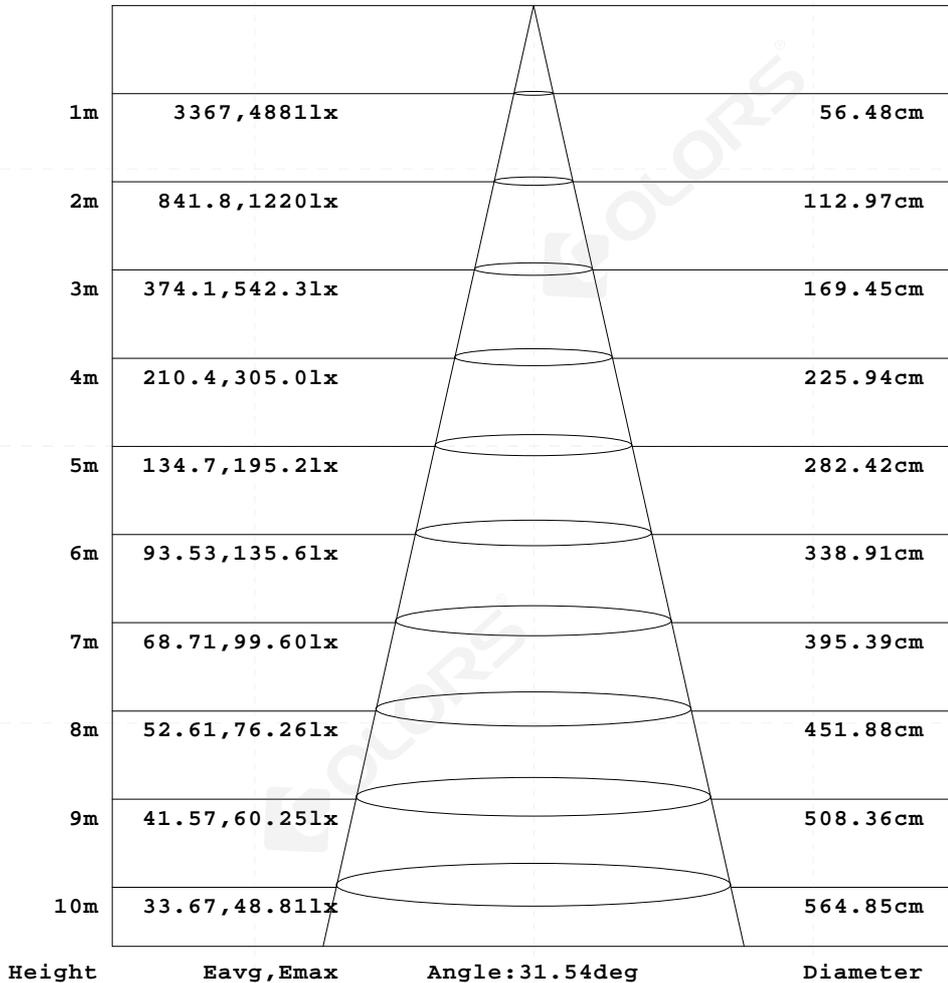


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:JYH  
Test Date:2021-05-18

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

**ISOLUX DIAGRAM**

Test:U:24.00V I:0.8238A P:19.77W PF:1.000 Freq:0Hz Lamp Flux:1693.02x1 lm		
NAME: LLS-LE25GFXBS1100(A)-R20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:1100*25mm	Shielding Angle:

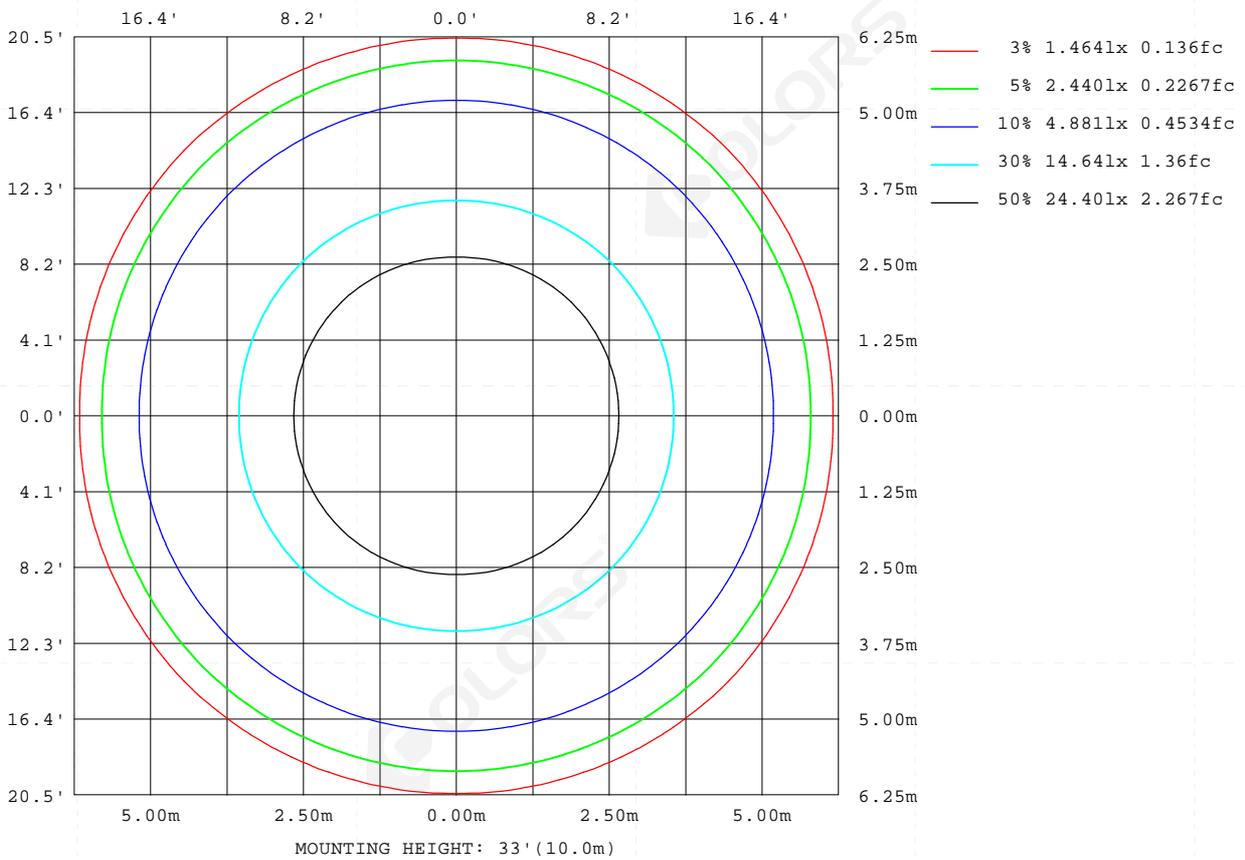

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: JYH  
 Test Date: 2021-05-18

Page Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity: 65.0%  
 Test Distance: 10.950m [K=1.0000]  
 Remarks:

LED Avg.L Report

Test:U:24.00V I:0.8238A P:19.77W PF:1.000 Freq:0Hz Lamp Flux:1693.02x1 lm		
NAME: LLS-LE25GFXBS1100(A)-R20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:1100*25mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	24
L_0~180(75)av	12
L_0~180(85)av	7
L_90~270(65)av	109
L_90~270(75)av	123
L_90~270(85)av	191
L_45(65)av	36
L_45(75)av	32
L_45(85)av	31

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-05-18

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

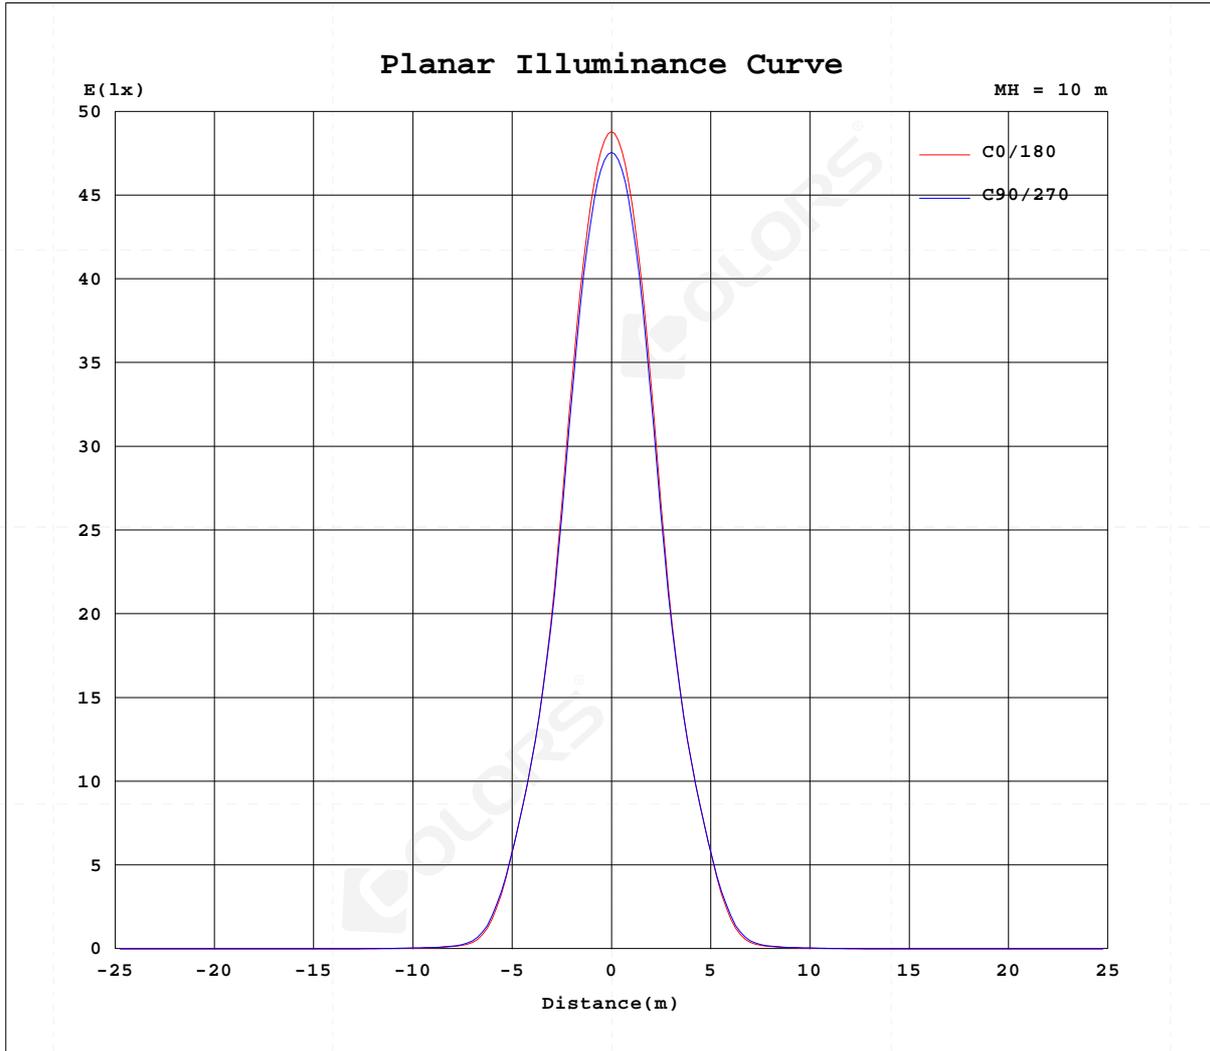

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: JYH  
 Test Date: 2021-05-18

Page Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity: 65.0%  
 Test Distance: 10.950m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.8238A P:19.77W PF:1.000 Freq:0Hz Lamp Flux:1693.02x1 lm		
NAME: LLS-LE25GFXBS1100(A)-R20NW8X-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:1100*25mm	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	45	90	135	180	225	270	315											
0	4881	4827	4758	4827	4881	4827	4758	4827											
5	4627	4583	4526	4583	4627	4583	4526	4583											
10	3868	3839	3770	3839	3868	3839	3770	3839											
15	2671	2671	2612	2671	2671	2671	2612	2671											
20	1674	1698	1673	1698	1674	1698	1673	1698											
25	1012	1019	1007	1019	1012	1019	1007	1019											
30	383	413	413	413	383	413	413	413											
35	71.6	95.0	87.9	95.0	71.6	95.0	87.9	95.0											
40	24.9	29.3	29.3	29.3	24.9	29.3	29.3	29.3											
45	13.3	15.7	16.7	15.7	13.3	15.7	16.7	15.7											
50	6.84	8.35	9.42	8.35	6.84	8.35	9.42	8.35											
55	3.31	3.59	4.57	3.59	3.31	3.59	4.57	3.59											
60	0.64	0.86	1.70	0.86	0.64	0.86	1.70	0.86											
65	0.28	0.42	1.27	0.42	0.28	0.42	1.27	0.42											
70	0.17	0.31	1.05	0.31	0.17	0.31	1.05	0.31											
75	0.08	0.23	0.88	0.23	0.08	0.23	0.88	0.23											
80	0.03	0.14	0.65	0.14	0.03	0.14	0.65	0.14											
85	0.02	0.08	0.46	0.08	0.02	0.08	0.46	0.08											
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00											

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-05-18

g Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks: