

Specification

Architecture lighting integration series

LE2711




LE2711



Features

- Applied to the floor , integrated with architecture
- Very thin design, suitable for indoor floor, outline & decorating
- AL6063-T5 aluminum profile with high-quality surface treatment.
- Close-fitting design without screw, Make installation more convenient.



Standard Configuration

Picture	Item	Parameter	Model
	Profile	Profile weight: 0.76kg/2.5m Size: L2500*W27*H11mm Material: AL6063-T5 Surface processing: Anodizing	/
	cover	Type: Frosted diffuser Material: PC Light transmittance: 75% Size: L2500*W18*H3.4mm PC Feature: The diffuser will extend (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	/
	End caps	Size: L27*W11*H7.8mm Material: PC	EC-LE2711



Optional Accessories

Picture	Item	Parameter	Model
	Flexible strip D8168-24V-10mm	Material: FPC,CCT:1900/2300/2700/3000/3500/4000/5000/6000K; CRI > 90/>95; Voltage: 24V; Power: 16.2W/m; Lumen: 1860Lm/m; Width: 10mm; Minimum cutting unit: 7LEDs/42mm;	D8168-24V- 10mm
	End cap with hole	Size: L27*W11*H7.8mm Material: PC	EC-LE2711


Optical Parameter

(D8168-24V-10mm light source, frosted diffuser)

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

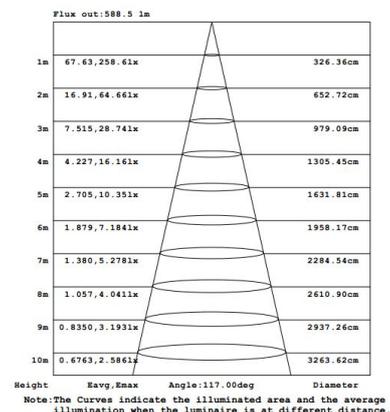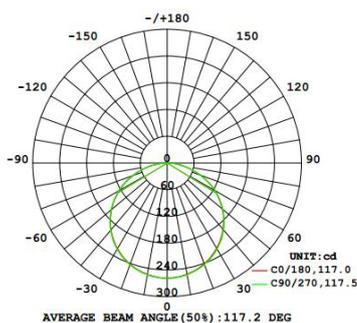

Package

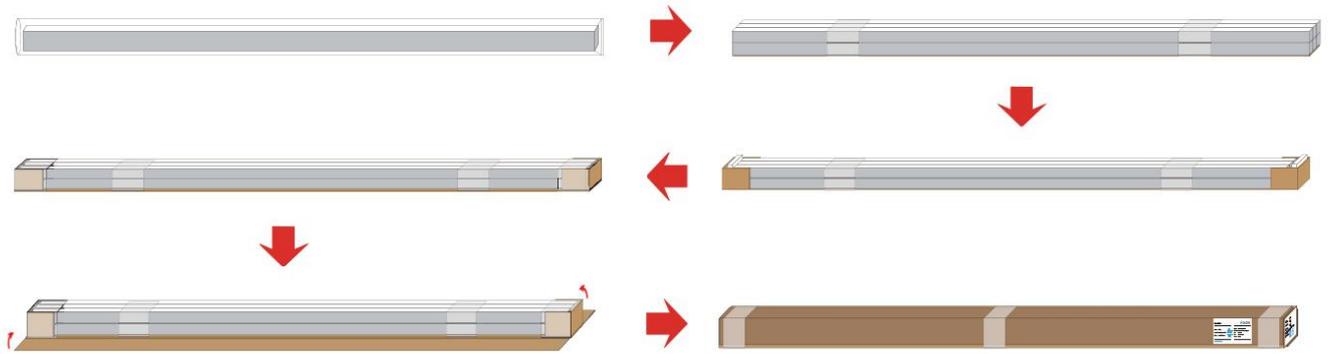

Item	Type	Size(mm)	NW(kg)	GW(kg)	Content
Profile and cover	Packing box	2580*173*140mm	21.6	24.6	24pcs/box

