


Specification

Architecture lighting integration series

LS2126




LS2126

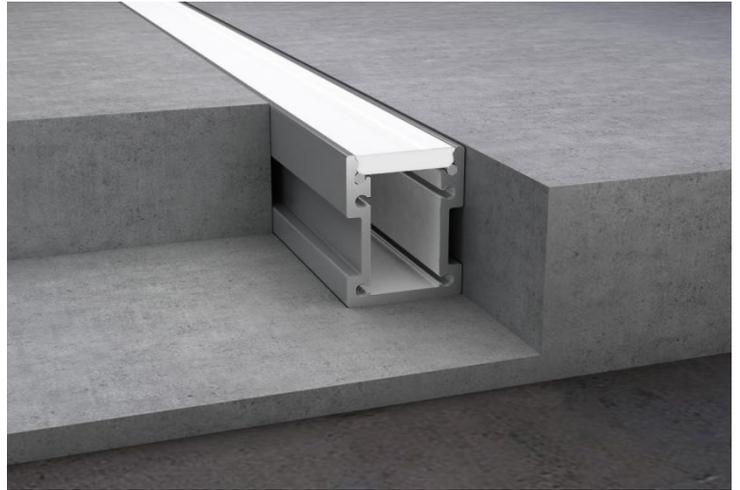

Features

- Apply to outdoor ground, Can be used to outline and decorating
- AL6063-T5 aluminum profile with high-quality surface treatment.
- Close-fitting design without screw, make installation more convenient.
- IK10、IP65 waterproof level design , can be used widely in indoor and outdoor floors.



Standard Configuration



Picture	Item	Parameter	Model
	Profile	Profile weight: 1.16kg/2.5m Size: L2500*W21.4*H27mm Material: AL6063-T5 Surface processing: Anodizing	/
	cover	Type: Frosted diffuser Material: PC Light transmittance: 75% Size: L2500*W18*H3.4mm PC Feature: The diffuser will extend (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	/
	End caps	Size: L27*W21.4*H5mm Material: PC	EC-LS2126

Optional Accessories


Picture	Item	Parameter	Model
	Flexible strip D6140-24V-8mm	Material: FPC, CCT: 2700/3000/4000/6000K; Ra > 90; Voltage: 24V; Power: 6.6W/m; Lumen: 710Lm/m; PCB width: 8mm; Minimum cut: 50mm;	D6140-24V- 8mm
	End caps with hole	Size: L27*W21.4*H5mm Material: PC	EC-LS2126

Optical Parameter

(D6140-24V-8mm light source, frosted diffuser)

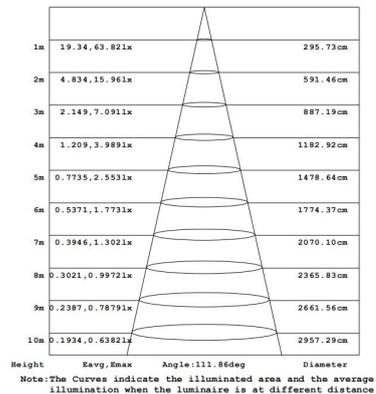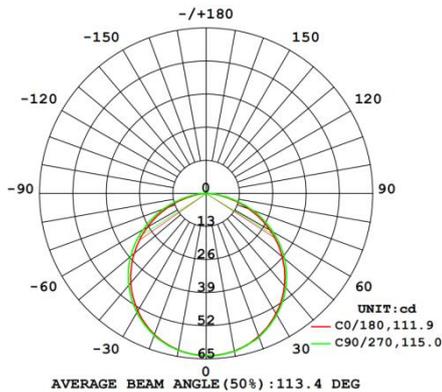

Package

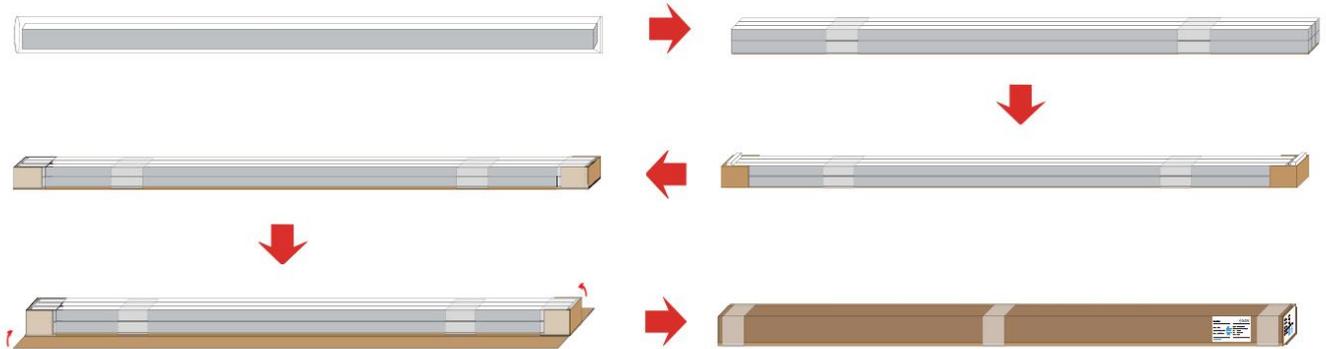

Item	Type	Size(mm)	NW(kg)	GW(kg)	Content
Profile and cover	Packing box	2580*173*140mm	27.2	30.2	20pcs/box

