


Neon Specification

NJS1010

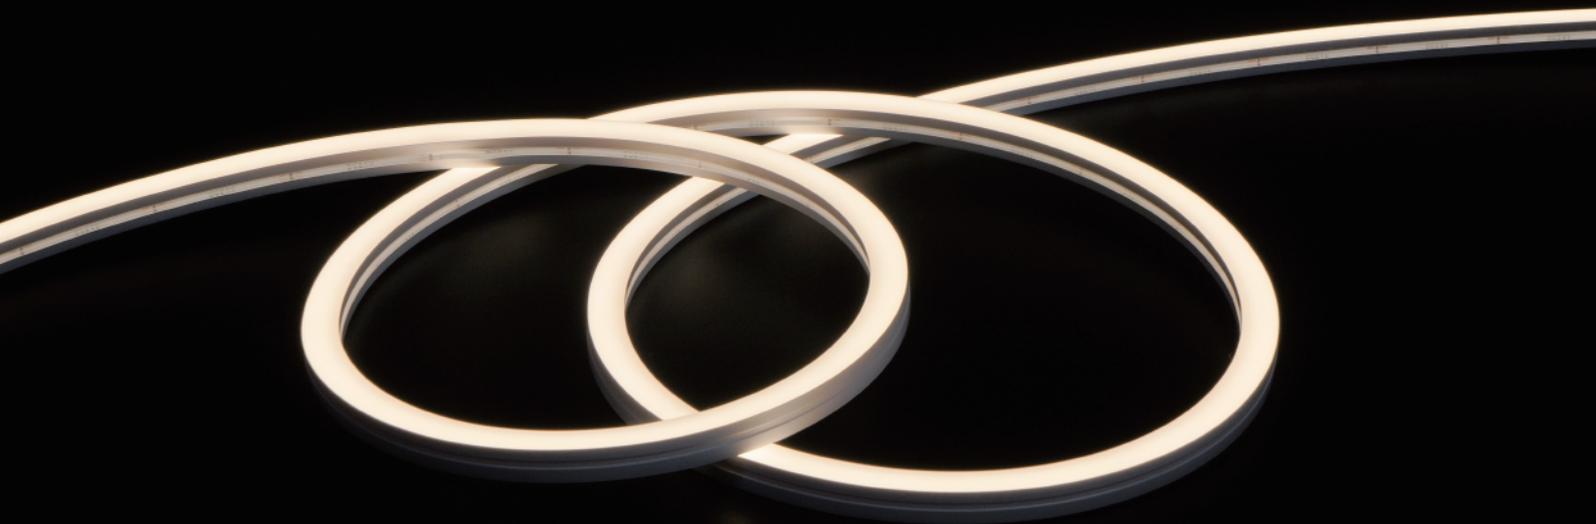


【Features】

- Process & Material: High light transmittance, environmental silicone material, integrated extrusion molding technology, IP65.
- Optical Design: Unique optical light distribution structure design, uniform lighting surface and no shadow.
- Appearance Design: Compared with the traditional neon tube or PVC guardrail tube, the silicone material has good flexibility, the simple and stylish appearance, which is exquisite and unique.
- Product certification: CE, UKCA;
- Environmental Features: Resistance to saline solutions, acids & alkali, corrosive gases and UV.
- Working/Storage Temperature: Ta:-25~55°C / 0°C~60°C.
- Application: Interior outline, auxiliary lighting.
- Indoor 3-year warranty, working life \geq 36000 hours, outdoor 2-year warranty.



2700 K 3000 K 4000 K 5500 K




【Basic Parameters】

| Model | CCT/colors | CCT range | CRI | Input voltage (V) | Rated current (A/m) | Rated power (W/m) | MAX power (W/m) | Lumens (LM/m) | Length | Remark |
|--------------------------|------------|------------|-----|-------------------|---------------------|-------------------|-------------------|-------------------|--------------------|--------------|
| NJS1010-8XX24NSN050CSXXX | 2700K | 2600-2900K | >80 | 24 | 0.37 (0.11A/ft) | 8.8 (2.7W/ft) | 9.6 2.93(W/ft) | 530 (162LM/ft) | 5000mm (16.4ft) | 6LED/38.46mm |
| | 3000K | 2900-3300K | | | | | | 530 (162LM/ft) | | |
| | 3500K | 3300-3700K | | | | | | 560 (171LM/ft) | | |
| | 5200K | 5000-5500K | | | | | | 550 (168LM/ft) | | |


Note:

1. The above data is the testing result of 1M standard product;
2. The lumens of output data can be vary up to $\pm 15\%$;
3. The above parameters are all typical values;
4. Standard glue plugs are shipped.

[Light Distribution]

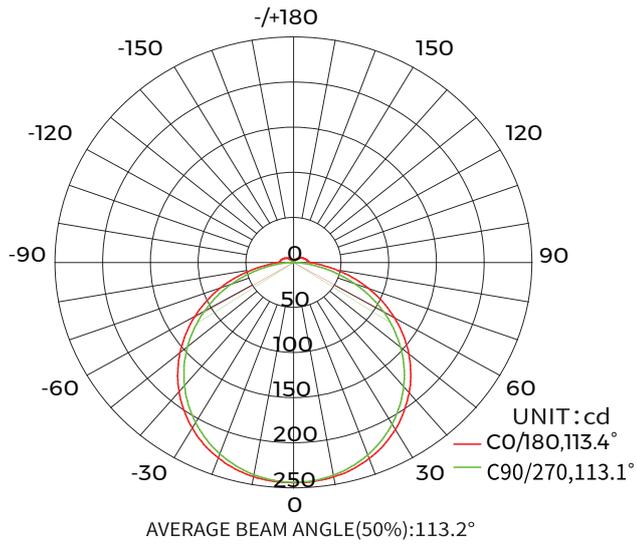

Light distribution

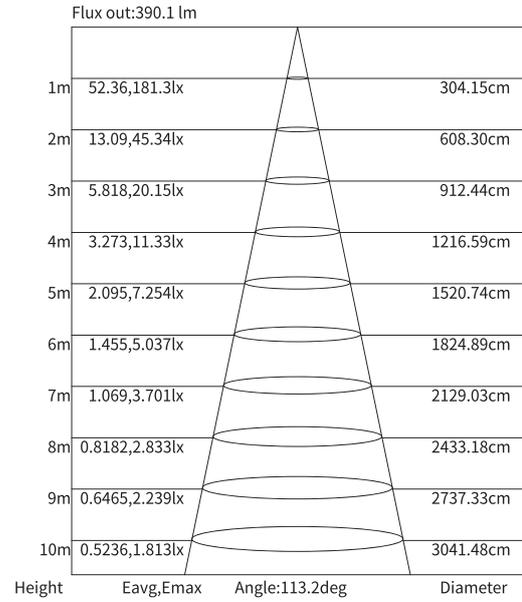


Effective average illuminance


Note: The above data is based on 24V monochrome 4000K color temperature. If you need other models of IES files, please download the corresponding models from the IES database.

[Product Mechanical Parameters]


• IP65 Glued cap-top outlet

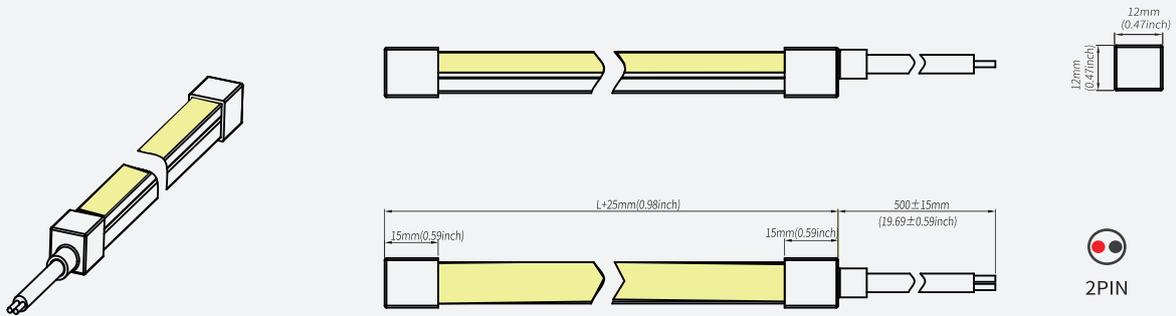

• IP65 Metal cap-top outlet

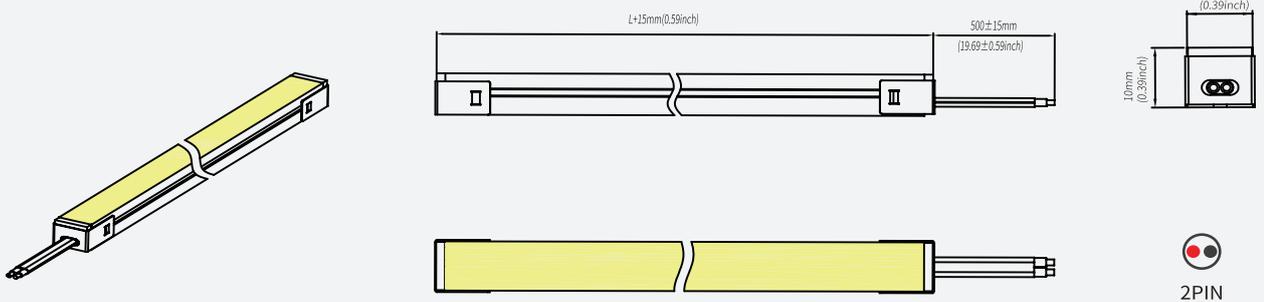

[Accessory Information]

| Name | Description | Image | Sectional size | Ordering code | Quantity case (PCS) | Net weight (kg) | Per box net weight (kg) | Gross weight (kg) | Packing (mm) | Remark |
|-----------------|---|---|---|------------------|---------------------|-----------------|-------------------------|-------------------|--------------|-----------------------------------|
| Alumina carrier | Flat mounting slot |  |  | AS-NMT1010A-1000 | 98 | 0.18 | 17.64 | 18.64 | 1180*135*130 | Size: L1000*W12*H11mm with screws |
| Aluminium clip | Flat mounting clip |  | | AS-NMT1010A-20 | 800 | 0.06 | 4.8 | 4.95 | 250*250*150 | Size: L20*W12*H11mm with screws |
| End cap set | End cap set, including end cap and plug (outlet from the top) |  |  | AS-NMT1010GH0-EC | 800 | 0.003 | 2.4 | 2.7 | 250*250*150 | / |
| Glue | 588G acidic glue |  | / | AS-PG-0002 | 150 | 0.014 | 2.1 | 2.4 | 250*250*150 | 10ml/pcs |
| Wire | 2P PVC Wire (0.5M) |  | / | AS-WS-0001 | 150 | 0.01541 | 2.31 | 2.61 | 250*250*150 | Suitable for white light strip |
| Wire | 2P PVC Wire (2M) | | | AS-WS-0002 | 125 | 0.0616 | 7.7 | 8 | 250*250*150 | |
| Connector | 2PIN IP68 waterproof connector |  | / | AS-FC-0001 | 512 | 0.016 | 8.192 | 9.5 | 365*365*190 | Suitable for white light strip |
| Gray wire | 2PIN Gray wire (0.5M) |  | / | AS-WS-0009 | 200 | 0.0077 | 1.54 | 1.84 | 250*250*150 | Suitable for metal plugs |
| Gray wire | 2PIN Gray wire (2M) | | | AS-WS-0010 | 100 | 0.031 | 3.1 | 3.4 | | |


[Product control system solutions]

| Product Image | product name | Product number | Order code | Product specifications | Applicable Products |
|---|-----------------------------|----------------|---------------------|--|--|
|  | Monochrome remote | CK1-GBA | 402-02-000000-00001 | output signal:RF Working voltage:3VDC(CR2032) Remote control distance:30m Working temperature:Ta:0-30 °C-0+55 °C | Monochrome light strip (Use with CR1-GBA) |
|  | Monochrome light controller | CR1-GBA | 402-01-000000-00001 | Input voltage:DC12-48V Output current:15A@12V/24V,10A@36V/48V Output Power:Max 180W@12V/Max 360W@24V/Max 360W@36V/Max 480W@48V Working temperature:-30°C— +55°C | Monochrome light strip (Use with CR1-GBA) |

[Packaging Solutions]

• Standard Packaging


1. Line marking, the line marking is affixed at a distance of 80mm from the end of the line;

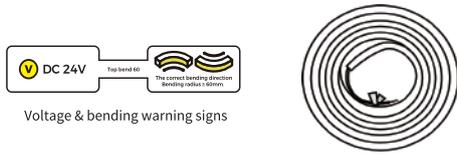

4. Label the carton and pack it into the carton



2. Put the product information label on the back back of the static bag inside the marking line;

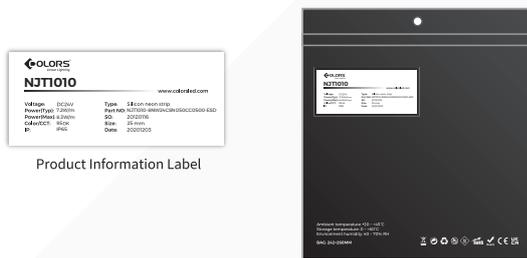


5. Pack 4 boxes of products in the carton



3. Put the light strip into an electrostatic bag, one roll per bag, and seal the bag;



6. Put the product information label and the box number label on the side of the carton, and the QC inspection stamp

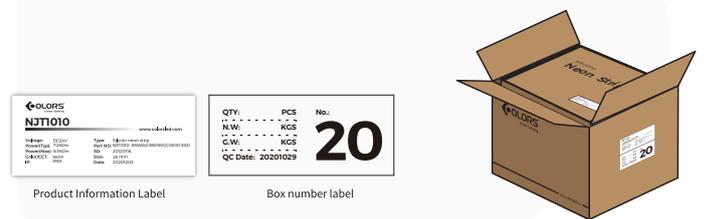


| Model | Size | Product Quantity (box) | Product Quantity (case) | Net weight (kg) | Net weight per box (kg) | Gross weight (kg) | Carton size(m) |
|--------------------------|---------------|------------------------|-------------------------|-----------------|-------------------------|-------------------|----------------|
| NJS1010-8XX24NSN050CSXXX | L5000*10*10mm | 5M*4 | 80M | 0.505 | 8.08 | 10.42 | 0.41*0.41*0.26 |

【Reliability test】

| Test Item | Classification | Reference | Test method or condition |
|---------------------------------|--------------------------------------|--------------------------------|--|
| Safety test | Mechanical strength | IEC 60598-1; IEC 60598-2-21 | The hammer spring Impact energy 0.35J |
| | IP | IEC 60598-1; IEC 60598-2-21 | IP65 |
| | Winding Test | IEC 60598-1; IEC 60598-2-21 | φ150mm cylinder, 60N pull, winding 10 times at (-25°C ±2°C), and 10 times after(-15°C±2°C, 16h). |
| | Cold Bend Test | IEC 60598-1; IEC 60598-2-21 | wound on mandrel, low-temperature (-15°C±2°C, 16h), around the mandrel for two turns |
| | Cold Impact test | IEC 60598-1; IEC 60598-2-21 | Low-temperature (-15°C±5°C, 16h), hammer falls from a height of 100mm. |
| | Insulation Resistance | IEC 60598-1; IEC 60598-2-21 | ≤ 2MΩ |
| | Electrical strength | IEC 60598-1; IEC 60598-2-21 | 500V |
| Mechanical reliability testing | Bending test | Colors | Each 200mm, bending up and down 100 times |
| | Bending test | Colors | Each 200mm, bending left and right 100 times |
| | Torsion test | Colors | Twist clockwise 5 times and then release, repeat 200 times |
| | Disassembly and assembly test | Colors | Repeat disassembly and assembly, 10 times |
| Environment Reliability testing | High temperature storing test | IEC 60068-2-2 | 80°C, 168h |
| | Low temperature storing test | IEC 60068-2-1 | -40°C, 168h |
| | High temperature and Humidity impact | IEC 60068-2-78 | 60°C, 85%RH |
| | Salt Spray test | IEC 60068-2-11 | 5% salt solution concentration, 24h |
| | IK | IEC 62262 | 5 times of impact on each exposed surface |
| | Lifetime aging test | Colors | 35°C, 6000h |
| | switch test | Colors | 10s On, 10s Off, 10000 times |

【Precautions】

- Use a 24V DC isolated power supply to drive the neon lamp strip and the ripple wave of constant voltage source shall be less than 5%. It is not allowed to use RC voltage reduction or non-isolated power supply to drive the neon lamp strip.
- In actual applications, 20% of the power supply shall be kept (only 80% of the power is used) to guarantee that sufficient voltage is available to drive the product.
- Attention shall be paid to safe operation. After powering on, it is not allowed to touch the AC power supply to avoid an electric shock.
- Attention shall be paid to the positive and negative poles of the wires during installation and whether the power supply conforms to required voltages to avoid damages.
- Avoid scratching, distortion and irregular bending of the product during installation; otherwise it may cause irreparable damage to the product.
- Please do not bend the strip into an arc with a diameter less than 60mm to ensure the longevity and reliability, the bending diameter too small will damage the product itself.
- If the actual length of application exceeds the specified using length, it will lead to overload heating and uneven brightness.
- Non-professionals are prohibited from installing, disassembling and repairing the product.
- Do not use any acid or alkaline adhesive to fix products (including not limited to glass cement, etc.)
- Product is not suitable for use in swimming pools and fountains.
- Please confirmed before usage as products of varied sizes show slight differences in their color under same color temperature due to their structural differences.
- When IP65 protective products are installed and applied, the waterproofing grade should be degraded after self-processing and cutting.
- In mass production, 1-2 splices are allowed within every 5 meters.
- Please use professional cutting tools when cutting.
- The board of this product is a DJ light strip board. After the secondary processing of the welding wire, before the plug is fixed, do not pull or bend the solder joints for many times, otherwise the solder joints will fall off.
- Due to the characteristics of the silicone material, it is normal for the color of the colloid to change slightly after the neon product is used for a long time.
- It is strictly forbidden to use 502/705 and other adhesives that are prone to chemical reactions with silica gel during construction and installation. It is recommended to use silicone sealant for bonding.
- Long-term storage and the remaining products after cutting and use must be sealed to avoid exposure to organic environments such as aldehydes/benzenes.
- When the product is installed and used, it is recommended that the product as a whole be in the same environmental conditions to avoid inconsistent color changes of the product colloid due to differences in product exposure and environmental conditions.

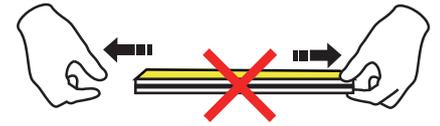

No stretching



No distortion



No trampling