



Specification

Architecture lighting integration series

SK6013(B)




SK6013(B)

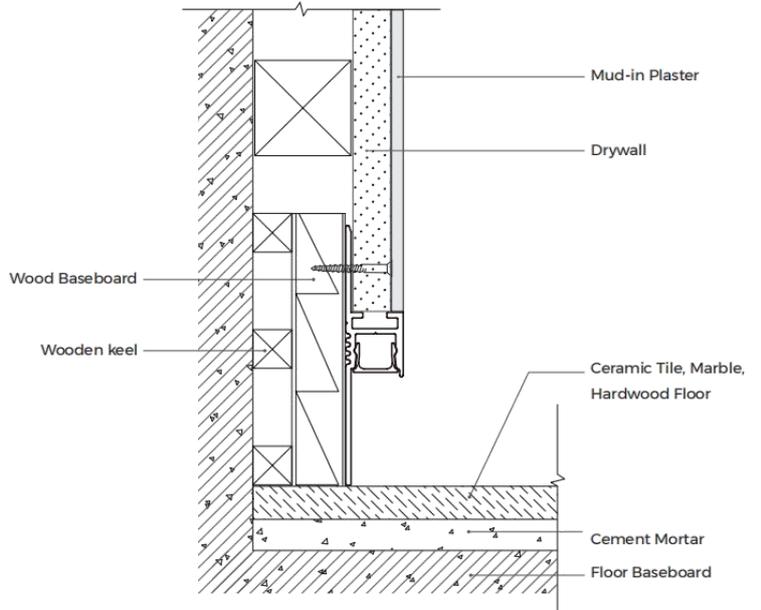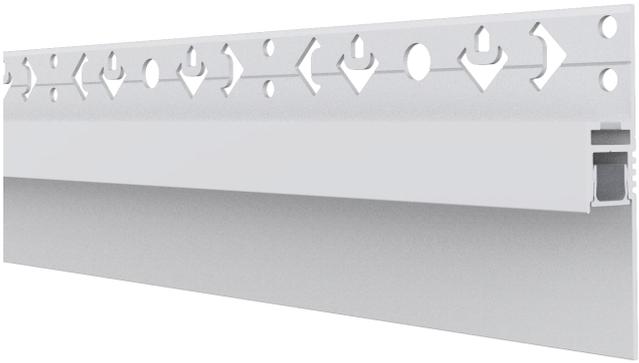

Features

- Apply to skirting board , integrated into architecture.
- Indirect lighting design integrates architectural and lighting effects.
- AL6063-T5 aluminum profile with high-quality surface treatment.

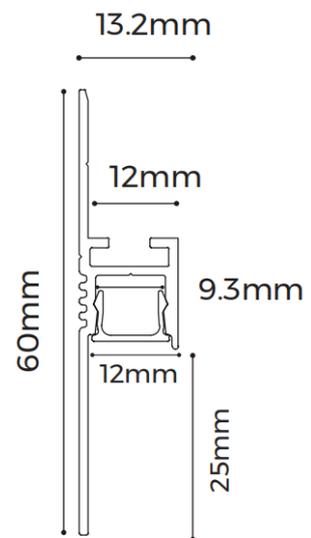

Standard Configuration



Picture	Item	Parameter	Model
	Profile	Profile weight: 0.8kg/2.5m Size: L2500*W13.2*H60mm Material: AL6063-T5 Surface processing: Spraying RAL9003	/
	cover	Type: Frosted diffuser Material: PC Light transmittance: 80% Size: L2500*W10.3*H6.8mm PC Feature: The diffuser will extend (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	/

Optional Accessories


Picture	Item	Parameter	Model
	Flexible strip D6140-24V-8mm	Material: FPC,CCT : 2700/3000/4000/6000K; CRI > 90; Voltage: 24V; Power: 6.6W/m; Lumen : 710Lm/m; Width: 8mm; Minimum cutting unit: 7LEDs/50mm;	D6140-24V- 8mm
	Screw	Size: M3.5*40mm Material: Carbon steel	CL-01

Optical Parameter

(D6140-24V-8mm light source, frosted diffuser)

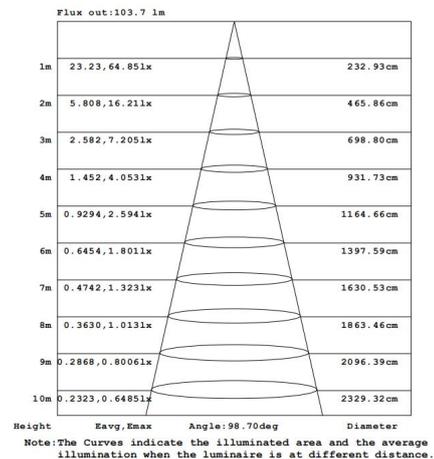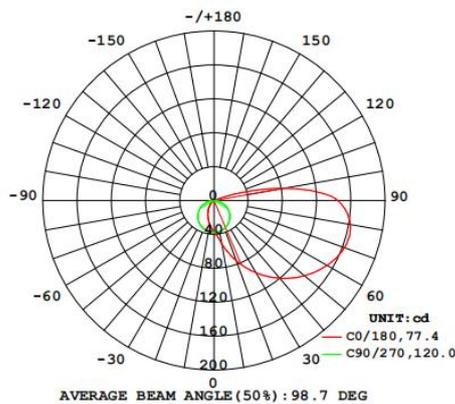

Package

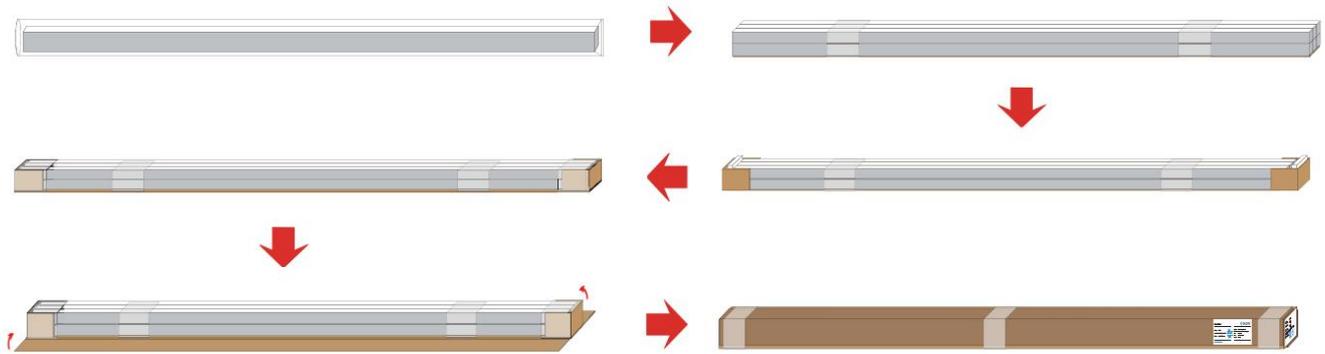

Item	Type	Size(mm)	NW(kg)	GW(kg)	Content
Profile	Packing box	2600*210*150mm	28.3	30.5	36pcs/box

