

Specification

Indirect Lighting

Direct Lighting

Wall Wash




Wall Washing






SKYLINE



Design principles

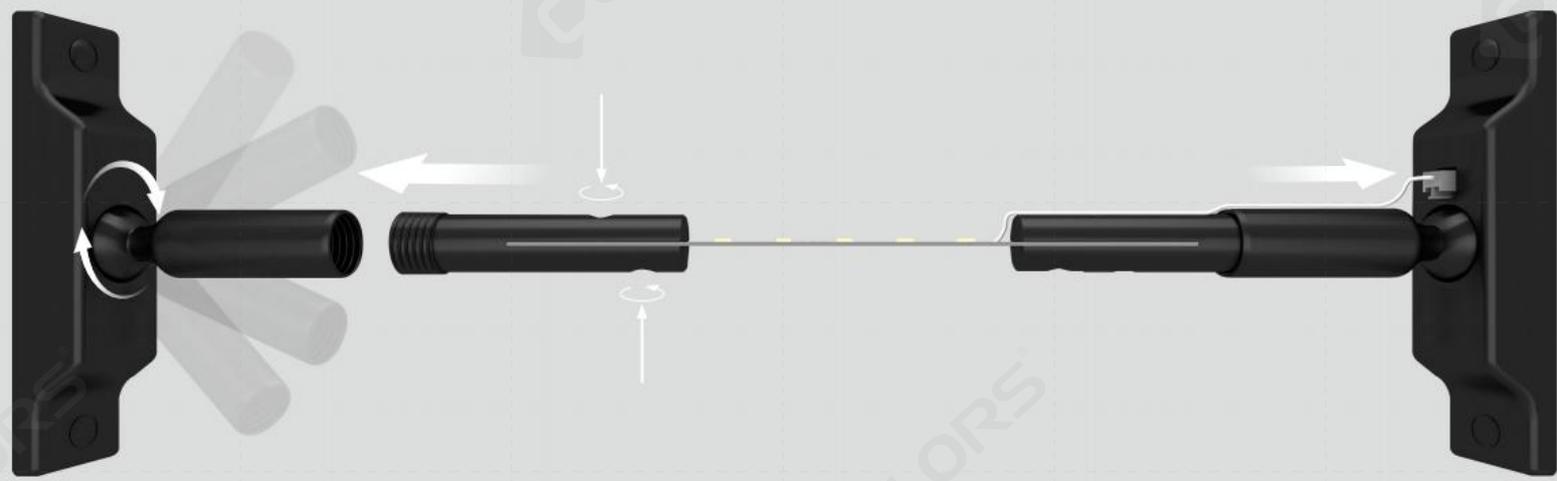

Application Guidelines

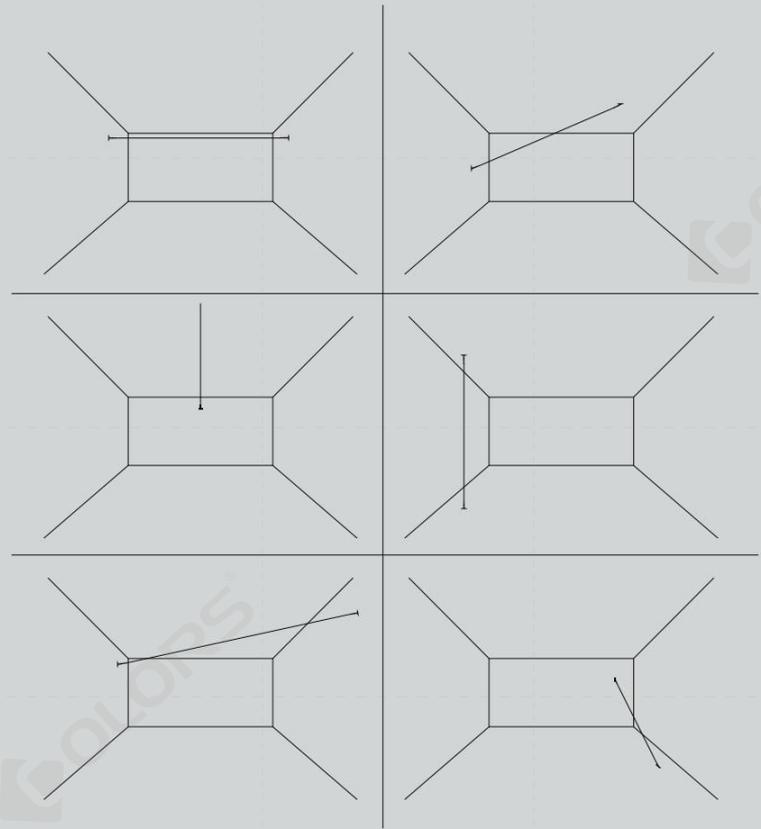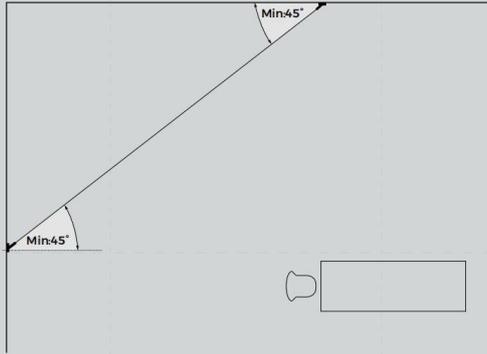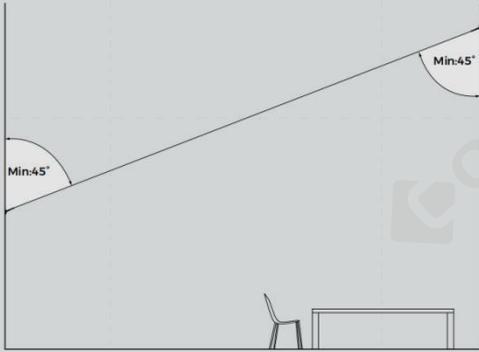


Installation guidelines

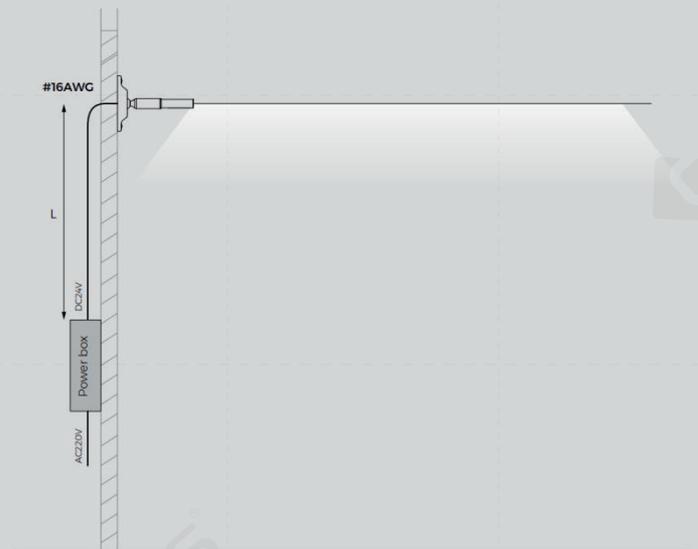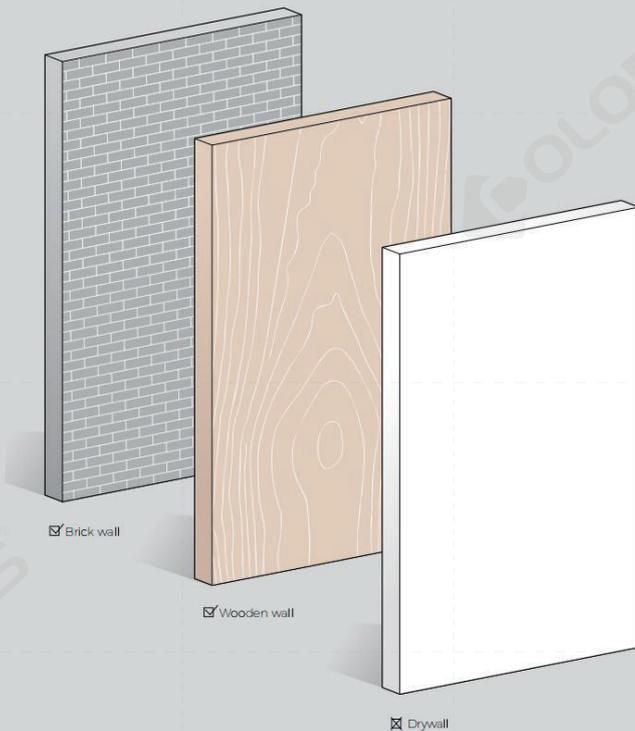

- SKY-06A: Lmax=9M; 13.5W/m; DC24V
- SKY-06B: Lmax=9M; 9.6W/m; DC24V
- SKY-12C: Lmax=7M; 8.7W/m; DC24V
- SKY-20C: Lmax=5M; 8.7W/m; DC24V
- SKY-06D: AC220-240V; Driverless

*Please calculate the required power according to the actual length

Ra90
 2700 K
 3000 K
 4000 K
 6000 K

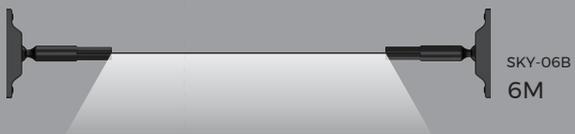

COF Strip Dot-free
 Direct Lighting
 9.6 W/m
 910 LM/m
 DC 24V

Ra90
 2700 K
 3000 K
 4000 K
 6000 K




High Lumen strip
 Indirect Lighting
 13.5 W/m
 1320 LM/m
 DC 24V

Ra90
 2700 K
 3000 K
 4000 K
 6000 K





Ultra long strip
 Indirect Lighting
 8.7 W/m
 890 LM/m
 DC 24V


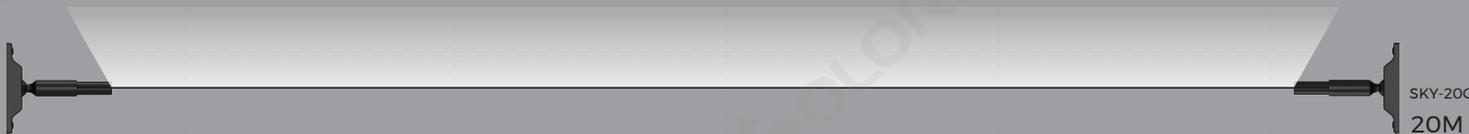


Model	SKY-06B	SKY-06A	SKY-12C	SKY-20C
Length	6M	6M	12M	20M
Lighting source				
Cutting Unit	50mm	50mm	50mm	50mm
Input voltage	DC24V	DC24V	DC24V	DC24V
CCT	2700 K 3000 K 4000 K 6000 K	2700 K 3000 K 4000 K 6000 K	2700 K 3000 K 4000 K 6000 K	<input type="checkbox"/> 2700 K 3000 K 4000 K 6000 K
CRI	>90	>90	>90	>90
Typ. power	9.6W/m	13.5W/m	8.7W/m	8.7W/m
Lumens	910LM/m	1320LM/m	890LM/m	890LM/m
Color				



Optical & electronic data

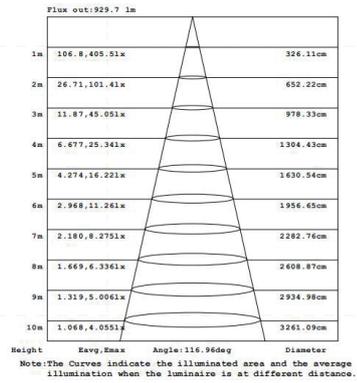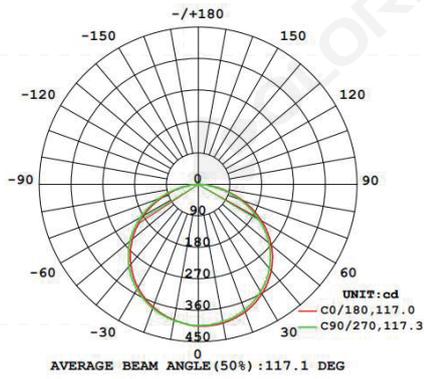

A

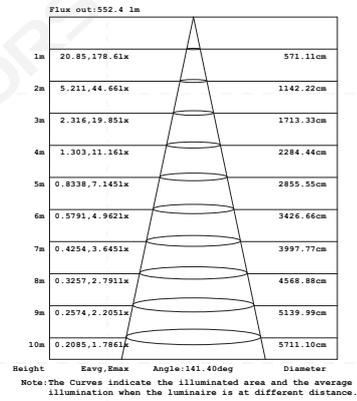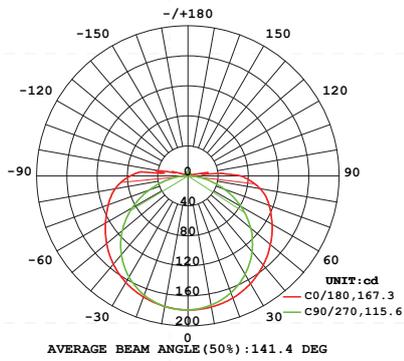

B

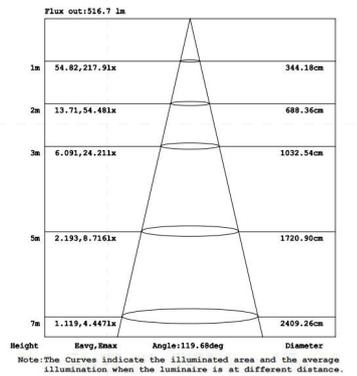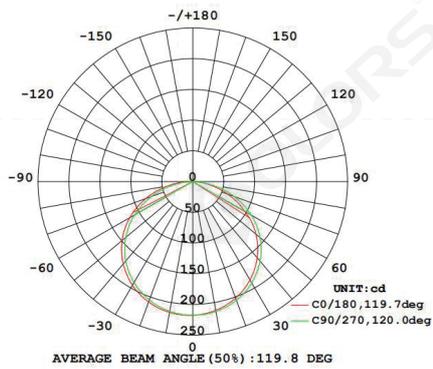

C

Packing



Components	Packaging material	Size(mm)	Type	GW	Content
Single piece	Hat box	352*346*70mm	6m	2kg	1pcs
Whole bundle	Hat box	365*360*295mm	6m	8kg	4pcs
Single piece	Hat box	352*346*70mm	12m	2.52kg	1pcs
Whole bundle	Hat box	365*360*295mm	12m	10.08kg	4pcs
Single piece	Hat box	352*346*70mm	20m	3.15kg	1pcs
Whole bundle	Hat box	365*360*295mm	20m	12.6kg	4pcs

Dimension(mm)

